


_ METAL IS OUR WORLD

Tools for Threading



How to find and order your tool solution:

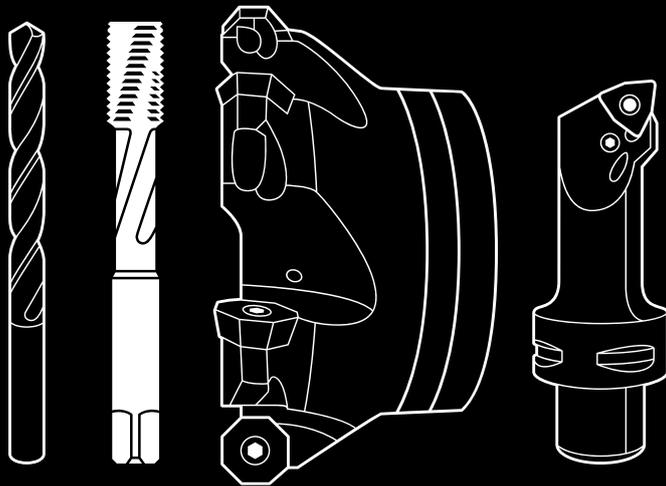

Personal – worldwide

You can contact us by phone, fax or e-mail. The contact details for your local contact can be found on our website at: walter-tools.com



The Walter Hybrid catalogues and brochures

show the entire standard range under the Walter, Walter Titex, Walter Prototyp and Walter Multiply competence brands – in print or in digital format – with product range overviews, product data, cutting data recommendations and much more. Including links to our machining navigator, Walter GPS, or the Walter TOOLSHOP with the chance to order directly.

At walter-tools.com, you can access and order your Walter products quickly and conveniently online – via smartphone, tablet or PC.

The benefit for you: Direct access from any device, displayed in an optimised form, at any time.

Walter online catalogue



Tool-specific search

You can find products in the Walter online catalogue using the familiar structure of our product catalogue as well as filter and search functions. Other features: A shopping function and links to drawings and models.

Walter GPS



Application-based search

With Walter GPS, it takes just a few steps to find the optimum machining solution for your component, online and offline – and the solution can be transferred directly to the Walter TOOLSHOP if required.

Walter Innotime®



Component-based search

With Walter Innotime®, you can find the most cost-effective machining solution for your component, including all the tools, machining steps and machining parameters required for this. Simply by uploading your 3D model.

Digital ordering methods



TOOLSHOP



EDI B2B

Walter TOOLSHOP & EDI

The Walter TOOLSHOP offers customers opportunities to find information and place orders quickly.

EDI (electronic data interchange) also makes it possible to exchange documents (e.g. orders) – even special tools can be ordered.

	Page
C – Threading	7
C1: Tapping	8
C – Threading	299
C2: Thread forming	300
C – Threading	357
C3: Thread milling	358



The structure of the new Walter General Catalogue

The new Walter General Catalogue presents information about products and applications in a comprehensive and clear manner as an e-document – including direct links to the Walter online catalogue.


Tapping

HSS-E (-PM) taps

Machining





Thread depth	3 x D _N	3 x D _N	3,5 x D _N	3,5 x D _N	1,5 x D _N
					

Designation	Prototex® X-pert P	Prototex® X-pert P AZ	Prototex® Eco Plus	TC216 Perform	Paradur® H
Thread type					
M	✓	✓	✓	✓	✓
MF	✓		✓	✓	✓
UNC / UNF / UN-8	✓		✓	✓	
G / Rc / Rp	✓				✓
MJ / UNJC / UNJF			✓		
NPT / NPTF					
Pg / BSW / Tr	✓				
Thread insert					
Tolerance	2B / 3B / 4H / 6G / 6H / 6HMOD / 7G / MEDIUM / NORMAL	6H	2B / 6G / 6H / NORMAL	2B / 6H	6H / NORMAL
Coolant supply	External	External	External / radial	External	External
Chamfer form	B	B	B	B	C
Coating / grade	TICN / TIN		TiN / TiN	WY80AA / WY80FC	TiN
Cutting tool material	HSS-E	HSS-E	HSS-E-PM	HSS-E	HSS-E
P Steel	●●	●●	●●	●●	●●
M Stainless steel	●●	●●	●●	●●	●●
K Cast iron	●●	●●	●●	●●	●●
N NF metals	●●	●●	●●	●●	●●
S Materials with difficult cutting properties	●●	●●	●●	●●	●●
H Hard materials					
O Other	●	●			
Page in catalogue	16	17	18	19	
QR code					
www.walter-tools.com/woc/prototex-xpert-p	prototex-xpert-p	prototex-xpert-p-az	prototex-eco-plus	TC216	paradur-h

WALTER SELECT

●● Primary application
 ● Other application

8 HSS-E (-PM) taps

Product range overviews with applications, materials and QR codes at a glance

The product range overviews include icons indicating applications, images of the products, and the range of materials for which the products can be used; if relevant, they also include shank versions, clamping systems and other important information. This means that you can immediately see which product you need – and go directly to more detailed information about it by scanning the corresponding QR code or typing the link provided into your browser.

NEW Tools with this icon are product innovations and are displayed in this way in the product range overviews.



   Indexable inserts and tools with these red icons are new to the range and are labelled in this way on the ordering page.

Scan the QR code

to go directly to the sub-page for the corresponding product in the Walter online catalogue. The brief overview contains an image of the tool or product, icons representing applications and other information, and the main and secondary applications in the ISO materials sector.



TC216

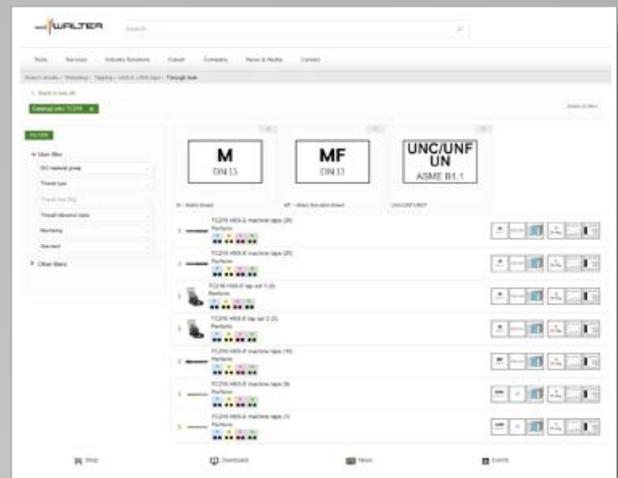


Direct link

As well as scanning the QR code, you can also type the link directly into your browser:

www.walter-tools.com/woc/TC216.

In the e-document, you can of course click on the link itself.



Detailed overview of product data

Depending on the product, the information available here or on the following product details page will include dimensions, corresponding indexable inserts, adaptors, and accessories, as well as direct links to additional information such as cutting data recommendations via Walter GPS or technical information like assembly instructions, limit speeds and much more.

HSS-E machine taps
TC216

Machine class: **UNC** 2B, **3x DN**, **32-HRC**, **ISO 9001**

For long-chipping materials: **WYSBAA (7x)**

Key (explanation of symbols):

DIN 371	Designation	D _h P	D _h mm	l ₁ mm	l ₂ mm	l ₃ mm
Perform - s3 fzD - UNC08 - DIN 371 - Subsize for through hole (S)	NuK	3.505 - 9.525	56 - 100	11 - 20	20 - 39	
TC216/UNC6-C0-WY90AA	UNC #6-32	3.505	56	11	20	✓
TC216/UNC8-C0-WY90AA	UNC #8-32	4.155	63	12	21	✓
TC216/UNC10-C0-WY90AA	UNC #10-24	4.820	70	13	25	✓
TC216/UNC14-C0-WY90AA	UNC 1/4-20	6.35	80	15	30	✓
TC216/UNC16-C0-WY90AA	UNC 5/16-18	7.938	90	18	35	✓
TC216/UNC3/8-C0-WY90AA	UNC 3/8-16	9.525	100	20	39	✓

Technologies at Walter.

Accure-tec

The patented Walter Accure-tec technology ensures maximum vibration damping on boring bars for turning and adaptors for milling. Ideal for turning, milling and drilling operations involving extended tool applications.

Tiger-tec® Gold

Tiger-tec® Gold is the new Walter generation platform for unique indexable insert coatings. It makes maximum tool life and process reliability possible. The CVD grade is produced using the innovative ultra low pressure method (ULP-CVD). The special titanium aluminium nitride layer makes them highly resistant to abrasion, hairline cracks, oxidation and plastic deformation. The heat-resistant, tough PVD grade with aluminium oxide multi-layer is suitable for difficult machining conditions.

Tiger-tec® Silver

With Tiger-tec® Silver, Walter is offering a world first in coating technology for indexable inserts. The special aluminium oxide layer with optimised microstructure reduces wear during turning, milling and drilling operations, and increases toughness and temperature resistance for significantly higher cutting data.

Walter BLAXX

Walter BLAXX is the benchmark for a new generation of milling cutters: The milling bodies are extremely robust thanks to their special surface treatment. The milling systems, which are mainly positioned tangentially, are equipped with Tiger-tec® indexable inserts. Tools with the "Walter BLAXX" designation combine high wear resistance with unbeatable performance data.

Walter Green

Walter Green: Sustainability and responsible use of resources are central components of our company principles. We use our "Walter Green" seal to show how we implement these principles, such as by offsetting our CO₂ emissions with environmental conservation projects.

Walter Nexxt

Engineering Kompetenz and digital expertise go hand in hand at Walter. Together with our wholly owned software subsidiary Comara, we develop digital solutions that efficiently connect machines and tools, optimising their performance on the basis of real-time data. Digital solutions on a level playing field with Industry 4.0 – Walter Nexxt.

Walter Xpress

Walter Xpress is the rapid ordering and delivery service offered by Walter Multiply for high-quality special tools. It is available for around 10,000 tool varieties, with a maximum delivery time of two to four weeks from the order date. The ordering process is clearly structured and guarantees absolute planning security. Quotations for all enquiries are calculated and provided within 24 hours.

XD Technology

Walter Titex solid carbide drilling and reaming tools stand for precision, high performance and cost-efficiency when drilling in practically any material. Walter Titex XD Technology offers the greatest precision and cost-efficiency in deep-hole drilling operations up to 70 × D_c without pecking.

Xill-tec™

With Xill-tec™, the solid carbide milling cutters from the MC230 Advance product range, Walter offers a uniquely wide range, with different dimensions, numbers of teeth and shank versions. This means that users are well-equipped for all conceivable milling operations and ISO materials. Universal use – with excellent quality.

Xtra-tec®

Xtra-tec® indexable insert milling cutters and drills guarantee extremely soft cutting action and optimal surface quality on almost all materials. Indexable inserts with highly positive geometries and the Tiger-tec® coating have a particularly beneficial hardness/toughness ratio. For maximum productivity and process reliability.

Xtra-tec® XT

Xtra-tec® XT is the latest generation of Walter milling tools. As the "Xtended" Xtra-tec® technology, it offers a completely new perspective on productivity and process reliability. It can cover nearly all milling operations in every common material group. More reliable, productive, cost-efficient than ever before – all while compensating for the CO₂ emissions through Walter Green.

X-treme Evo

The X-treme Evo solid carbide drills from the DC160 Advance product range and DC260 Advance step drills embody "the next generation of drilling": Can be used universally for all ISO material groups, machine concepts and applications. With outstanding tool life, productivity and process reliability.



Walter Capto™ is a modular tool adaptor system. It is suitable for all turning, milling, drilling and threading processes. Its ISO-standardised polygon taper absorbs torsional moments and bending moments extremely well and ensures optimal repeat accuracy.



Walter ConeFit is an extremely flexible solid carbide milling system with a wide range of high-performance exchangeable heads and shaft variants. Its conical thread can self-centre, thereby guaranteeing maximum stability and concentricity.



Walter ScrewFit users benefit from maximum flexibility. Its modular interface is suitable for a wide variety of boring bars and adaptors and a wide range of tool diameters and lengths for milling and drilling.



The precision-ground QuadFit interface with taper and support face characterises the precision of the vibration-damped boring bars for turning and thread turning with Walter Accure-tec technology. The exchangeable head system, which can be rotated by 180°, makes it possible to rapidly replace tools with high indexing accuracy.




In turning and grooving operations, the Walter precision cooling system provides cooling at the centre of the chip formation. Its dual coolant jets are directed precisely onto the flank and rake faces. In drilling operations, the coolant jets exit close to the cutting edge, cooling the flank and rake faces at the same time. This system provides significantly increased tool life, improved chip breaking and chip removal, greater efficiency and higher quality.



"Flash" refers to specialised solid carbide milling cutters for high-feed milling. Their end-face geometry reduces the chip thickness "h" and therefore enables an extremely high feed per tooth. Forces that occur are diverted axially towards the centre of the tool, which helps to stabilise the machining process.



On Walter turning toolholders with "SmartLock", the clamping screw can be operated from the side of the tool. This makes it possible to change the inserts in the machine quickly and easily. Tool change times are reduced as a result. Ideal for use on CNC lathe and multi-spindle machines.

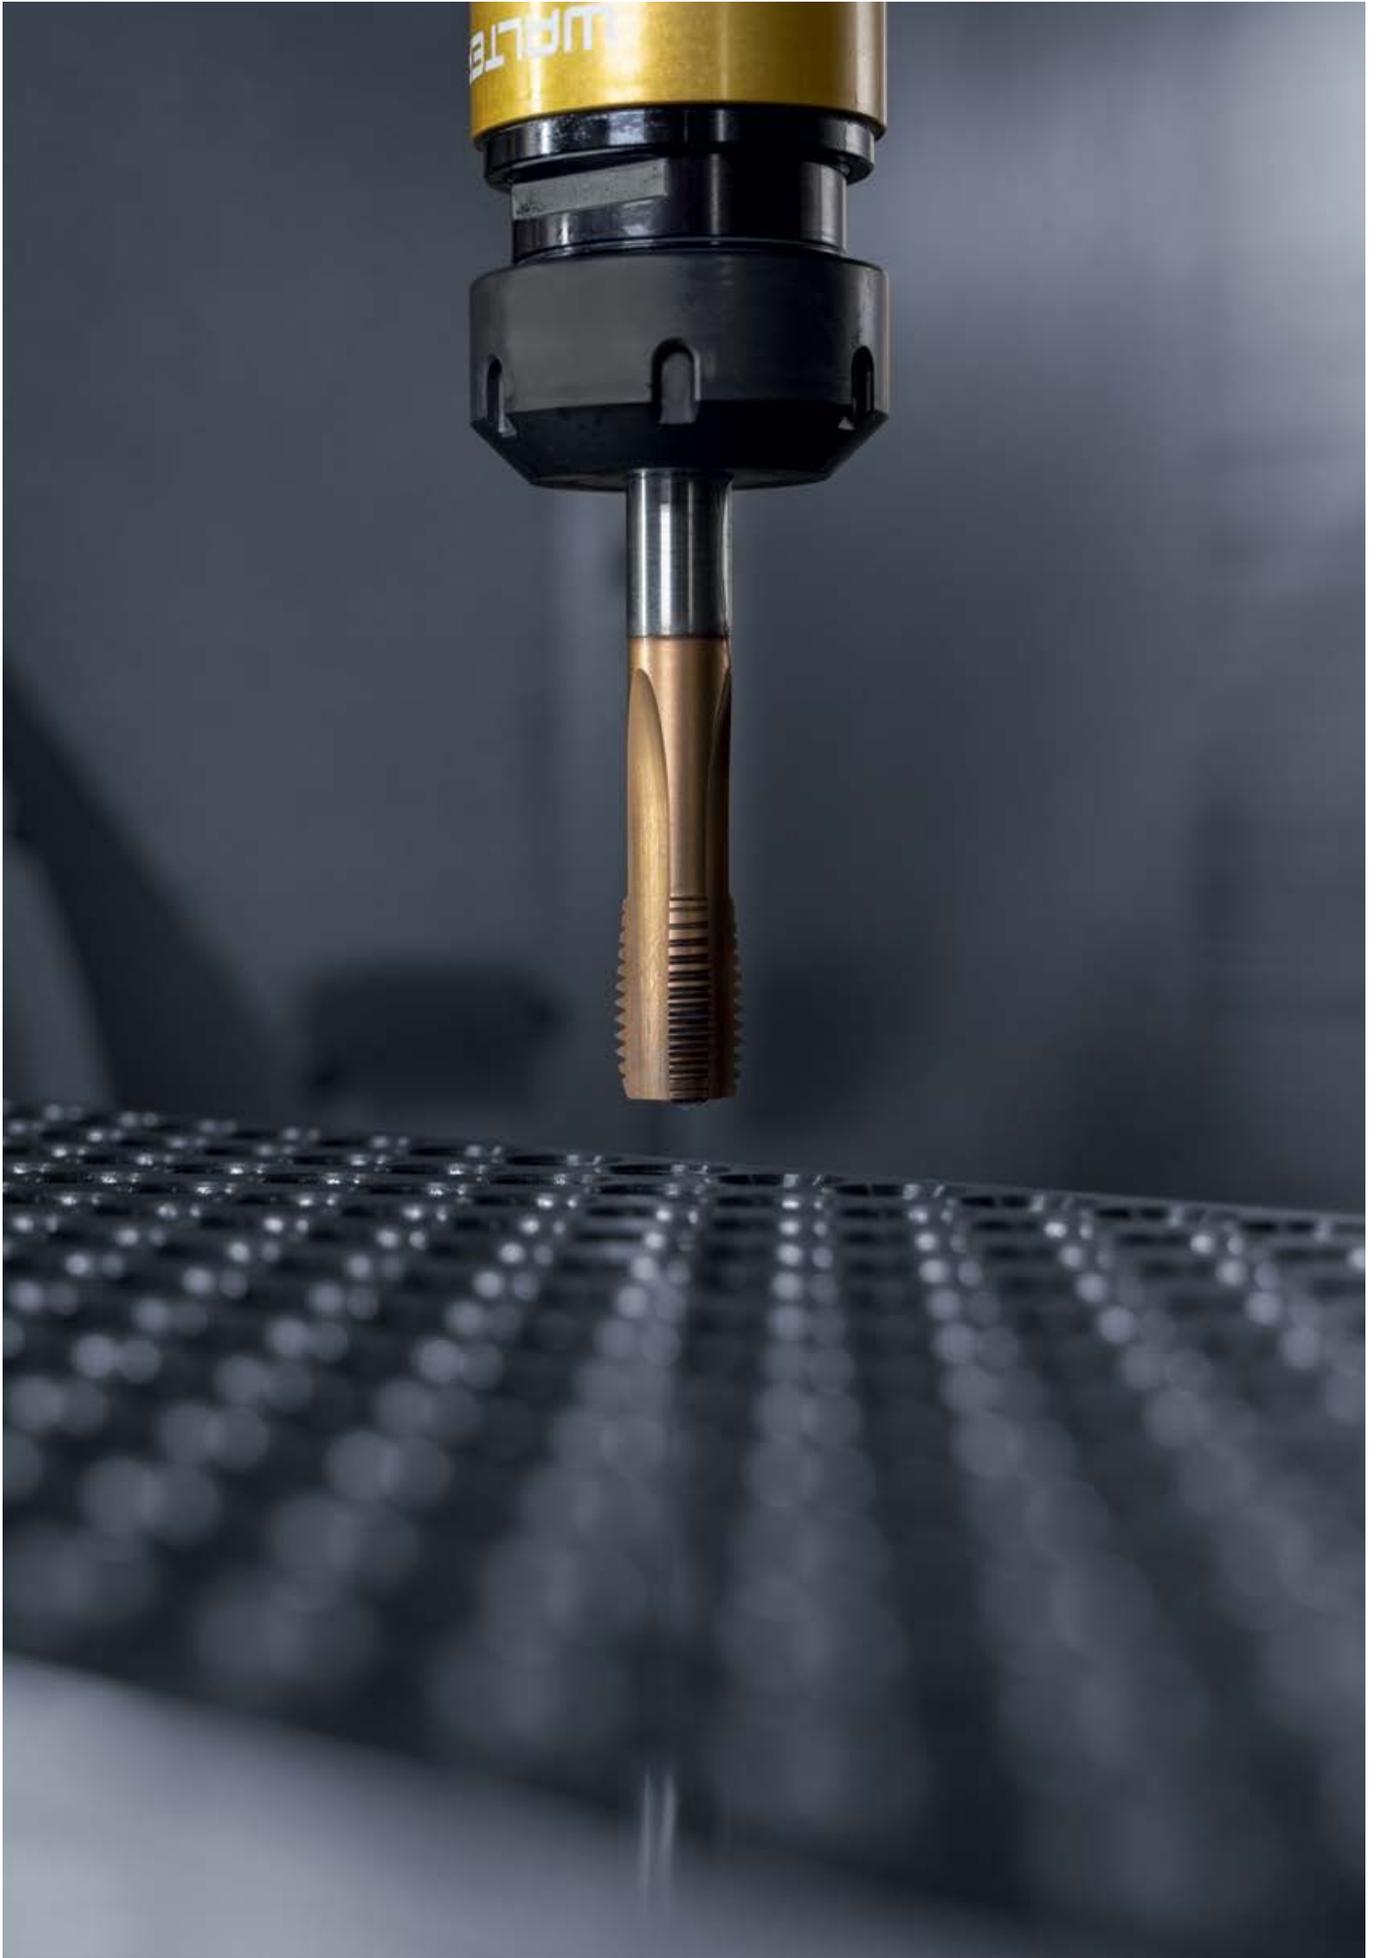

C – Threading

C1: Tapping

Page

HSS-E (-PM) taps


Product range overview	
HSS-E (-PM) taps	8
Order pages	
HSS-E (-PM) taps	21
M – Metric thread	53
MF – Metric fine-pitch thread	124
UNC/UNF/UN 8	171
MJ/UNJC/UNJF	218
G/Rc/Rp	224
NPT/NPTF	242
Pg/BSW/Tr	250
Thread insert	255

Solid carbide taps

Product range overview	
Solid carbide taps	278
Order pages	
M – Metric thread	280
MF – Metric fine-pitch thread	290
UNC, UNF	295
G	297

HSS-E (-PM) taps

Machining



Thread depth	1 x D _N				
--------------	--------------------	--------------------	--------------------	--------------------	--------------------



Designation	AMB	AMB Inox	MMB	Protostep Inox	Prototex® OS
-------------	-----	----------	-----	----------------	--------------

Thread type					
M	✓	✓	✓	✓	✓
MF					
UNC / UNF / UN-8					
G / Rc / Rp					
MJ / UNJC / UNJF					
NPT / NPTF					
Pg / BSW / Tr					

Indexable inserts basic shape

Tolerance	7G	6HX	6H	6HX	6H
-----------	----	-----	----	-----	----

Coolant supply	External	External	External	External	External
----------------	----------	----------	----------	----------	----------

Chamfer form	18 P	18 P		NA	B
--------------	------	------	--	----	---

Coating / grade	TIN	NID	uncoated	VAP	uncoated
-----------------	-----	-----	----------	-----	----------

Cutting tool material	HSS-E	HSS-E	HSS-E	HSS-E	HSS-E
-----------------------	-------	-------	-------	-------	-------

P Steel	●●		●●		●●
M Stainless steel		●●		●●	
K Cast iron					
N NF metals					●
S Materials with difficult cutting properties					
H Hard materials					
O Other					

Page in catalogue	C 57	C 58	C 56	C 59	C 29
-------------------	------	------	------	------	------

QR code					
---------	--	--	--	--	--

www.walter-tools.com/woc/	amb	amb-inox	mmb	protostep-inox	prototex-os
---------------------------	-----	----------	-----	----------------	-------------

C1

HSS-E (-PM) taps

Machining					
-----------	--	--	--	--	--

Thread depth	2 x D _N	2 x D _N	2 x D _N	3 x D _N	3 x D _N
--------------	--------------------	--------------------	--------------------	--------------------	--------------------



Designation	Prototex® TiNi	Prototex® TiNi Plus	TMB	KMB H	Paradur® N
-------------	----------------	---------------------	-----	-------	------------

Thread type					
M	✓	✓		✓	✓
MF	✓	✓			
UNC / UNF / UN-8	✓				
G / Rc / Rp					
MJ / UNJC / UNJF		✓			
NPT / NPTF					
Pg / BSW / Tr			✓	✓	
Indexable inserts basic shape	✓				

Tolerance	2B / 3B / 4H / 4HX / 6HX	3B / 6HX	7H	6H / NORMAL	6H
-----------	--------------------------	----------	----	-------------	----

Coolant supply	External	External	External	External	External
----------------	----------	----------	----------	----------	----------

Chamfer form	B	B	24 P	B	D
--------------	---	---	------	---	---

Coating / grade	TICN / uncoated	ACN	uncoated	uncoated	uncoated
-----------------	-----------------	-----	----------	----------	----------

Cutting tool material	HSS-E-PM	HSS-E-PM	HSS-E	HSS-E	HSS-E
-----------------------	----------	----------	-------	-------	-------

P Steel	●●		●●	●●	●●
M Stainless steel	●●				
K Cast iron			●●	●●	●●
N NF metals	●		●●	●●	●●
S Materials with difficult cutting properties	●●	●●			
H Hard materials					
O Other			●	●	

Page in catalogue	C 257	C 47	C 253	C 55	C 30
-------------------	-------	------	-------	------	------


QR code					
---------	--	--	--	--	--

www.walter-tools.com/woc/	prototex-tini	prototex-tini-plus	tmb	kmb-h	paradur-n
---------------------------	---------------	--------------------	-----	-------	-----------

C1

HSS-E (-PM) taps

Machining



Thread depth	3 x D _N				
--------------	--------------------	--------------------	--------------------	--------------------	--------------------



Designation	Prototex® Megasprint	Prototex® Sprint	Prototex® Synchrospeed	Prototex® X-pert M	Prototex® X-pert N
Thread type					
M	✓	✓	✓	✓	✓
MF		✓	✓	✓	
UNC / UNF / UN-8				✓	
G / Rc / Rp				✓	
MJ / UNJC / UNJF					
NPT / NPTF					
Pg / BSW / Tr					
Indexable inserts basic shape				✓	
Tolerance	6H	6H	6HX	2B / 3B / 5HX / 6GX / 6HMOD / 6HX / NORMAL	6H
Coolant supply	radial	External	External	External	External
Chamfer form	B	B	B	B	B
Coating / grade	TIN	TICN / TIN	THL / TIN	TICN / TIN / VAP	uncoated
Cutting tool material	HSS-E-PM	HSS-E-PM	HSS-E	HSS-E	HSS-E
P Steel	●	●	●●	●	
M Stainless steel	●	●	●●	●●	
K Cast iron			●●		
N NF metals	●	●	●●		●●
S Materials with difficult cutting properties			●●		●
H Hard materials					
O Other			●●		●
Page in catalogue	C 49	C 48	C 28	C 256	
QR code					
www.walter-tools.com/woc/	prototex-megasprint	prototex-sprint	prototex-synchrospeed	prototex-xpert-m	prototex-xpert-n

HSS-E (-PM) taps

Machining					
Thread depth	3 x D _N	3 x D _N	3,5 x D _N	3,5 x D _N	1,5 x D _N




Designation	Prototex® X-pert P	Prototex® X-pert P AZ	Prototex® Eco Plus	TC216 Perform	Paradur® H
Thread type					
M	✓	✓	✓	✓	✓
MF	✓		✓	✓	✓
UNC / UNF / UN-8	✓		✓	✓	
G / Rc / Rp	✓		✓		✓
MJ / UNJC / UNJF					
NPT / NPTF					
Pg / BSW / Tr	✓				
Indexable inserts basic shape	✓				
Tolerance	2B / 3B / 4H / 6G / 6H / 6HMOD / 7G / MEDIUM / NORMAL	6H	2B / 6GX / 6HX / NORMAL	2B / 6H	6H / NORMAL
Coolant supply	External	External	External / radial	External	External
Chamfer form	B	B	B	B	C
Coating / grade	TICN / TIN / uncoated	uncoated	THL / TIN	WY80AA / WY80FC	TIN / uncoated
Cutting tool material	HSS-E	HSS-E	HSS-E-PM	HSS-E	HSS-E
P Steel	●●	●●	●●	●●	
M Stainless steel			●●	●●	
K Cast iron	●●	●●	●●	●●	●
N NF metals	●●	●●	●●	●●	●●
S Materials with difficult cutting properties					
H Hard materials					
O Other	●	●			●
Page in catalogue	C 255	C 38	C 224	C 25	C 230
QR code					
www.walter-tools.com/woc/	prototex-xpert-p	prototex-xpert-p-az	prototex-eco-plus	TC216	paradur-h

C1

HSS-E (-PM) taps

Machining



Thread depth	1,5 x D _N	2 x D _N			
--------------	----------------------	--------------------	--------------------	--------------------	--------------------



Designation	Paradur® H AZ	HGB	HGB Inox	HGB Ti	Paradur® AP
Thread type					
M	✓	✓	✓	✓	✓
MF					
UNC / UNF / UN-8					
G / Rc / Rp					
MJ / UNJC / UNJF					
NPT / NPTF					
Pg / BSW / Tr					
Indexable inserts basic shape					
Tolerance	6H	6H	6HX	6HX	6HX
Coolant supply	External	External	External	External	External
Chamfer form	C	C	C	C	C
Coating / grade	uncoated	uncoated	VAP	NID	NIT
Cutting tool material	HSS-E	HSS	HSS-E	HSS-E	HSS-E
P Steel		●	●		
M Stainless steel			●		
K Cast iron	●●	●			
N NF metals	●●	●			●●
S Materials with difficult cutting properties				●	●
H Hard materials					
O Other	●				
Page in catalogue	C 75	C 50	C 51	C 52	C 115
QR code					
www.walter-tools.com/woc/	paradur-h-az	hgb	hgb-inox	hgb-ti	paradur-ap

HSS-E (-PM) taps



Machining					
Thread depth	2 x D _N	3 x D _N	3 x D _N	3 x D _N	



Designation	Paradur® FT	KMB Ms	Paradur® Eco CI	Paradur® X-pert K	Paradur Inox®
Thread type					
M	✓	✓	✓	✓	
MF			✓		
UNC / UNF / UN-8			✓		
G / Rc / Rp		✓	✓		
MJ / UNJC / UNJF					
NPT / NPTF					✓
Pg / BSW / Tr					
Indexable inserts basic shape					
Tolerance	6H	6H / NORMAL	2B / 6HX / NORMAL	6HX	NORMAL
Coolant supply	External	External	External	External	External
Chamfer form	D	E / F	C / E	C	C
Coating / grade	uncoated	uncoated	NiD / TiCN	TAFT	THL / VAP
Cutting tool material	HSS-E-PM	HSS-E	HSS-E-PM	HSS-E-PM	HSS-E
P Steel					●●
M Stainless steel					●●
K Cast iron			●●	●●	●
N NF metals		●●	●●	●	
S Materials with difficult cutting properties	●				
H Hard materials					
O Other	●	●	●●		
Page in catalogue	C 121	C 227	C 237	C 110	C 244
QR code					
www.walter-tools.com/woc/	paradur-ft	kmb-ms	paradur-eco-ci	paradur-xpert-k	paradur-inox

HSS-E (-PM) taps

Machining



Thread depth

 $1,5 \times D_N$


Designation	Paradur Inox® 40	Paradur® H	Paradur® N	Paradur® Ni	Paradur Inox® 25
Thread type					
M					✓
MF					✓
UNC / UNF / UN-8					
G / Rc / Rp		✓			✓
MJ / UNJC / UNJF					
NPT / NPTF	✓	✓	✓	✓	
Pg / BSW / Tr					
Indexable inserts basic shape					
Tolerance	NORMAL	NORMAL	NORMAL	NORMAL	6HX / NORMAL
Coolant supply	External	External	External	External	External
Chamfer form	C	C	C	C	E
Coating / grade	uncoated	uncoated	VAP	TICN / uncoated	TIN
Cutting tool material	HSS-E	HSS-E	HSS-E	HSS-E	HSS-E
P Steel	●●		●●	●	●●
M Stainless steel	●●				●●
K Cast iron	●	●	●●		
N NF metals	●	●●	●●		
S Materials with difficult cutting properties				●●	
H Hard materials					
O Other		●			
Page in catalogue	C 245	C 240	C 243	C 246	C 236
QR code					
www.walter-tools.com/woc/	paradur-inox-40	paradur-h	paradur-n	paradur-ni	paradur-inox-25

HSS-E (-PM) taps

Machining					
Thread depth	1,5 x D _N				




Designation	Paradur® HN	Paradur® N	Paradur® Ni	Paradur® Ni 10	TC122 Supreme
Thread type					
M		✓	✓	✓	✓
MF	✓	✓		✓	
UNC / UNF / UN-8		✓	✓		
G / Rc / Rp		✓			
MJ / UNJC / UNJF				✓	
NPT / NPTF					
Pg / BSW / Tr					
Indexable inserts basic shape			✓		
Tolerance	6HX	2B / 3B / 6G / 6H / NORMAL	2B / 3B / 4H / 4HX / 6HX	3B / 4H / 6HX	6HX
Coolant supply	External	External	External	External	External
Chamfer form	E	C	C	C	C
Coating / grade	uncoated	TICN / TIN / uncoated	TICN / uncoated	TIN / uncoated	WW60BC
Cutting tool material	HSS-E	HSS-E	HSS-E-PM	HSS-E-PM	HSS-E-PM
P Steel	●●	●●	●●	●●	●●
M Stainless steel					
K Cast iron	●●	●●	●●	●●	●
N NF metals	●●	●●	●	●	
S Materials with difficult cutting properties			●●	●●	
H Hard materials					
O Other					
Page in catalogue	C 148	C 231	C 261	C 118	C 86
QR code					
www.walter-tools.com/woc/	paradur-hn	paradur-n	paradur-ni	paradur-ni-10	TC122

C1

HSS-E (-PM) taps

Machining



Thread depth	2 x D _N	2 x D _N	2,5 x D _N	2,5 x D _N	2,5 x D _N
--------------	--------------------	--------------------	----------------------	----------------------	----------------------



Designation	Paradur® Ti	Paradur® Ti Plus	Paradur® H 24	Paradur® STE	Paradur® Synchrospeed
Thread type					
M	✓	✓	✓	✓	✓
MF	✓	✓		✓	✓
UNC / UNF / UN-8	✓				
G / Rc / Rp				✓	✓
MJ / UNJC / UNJF	✓	✓			
NPT / NPTF					
Pg / BSW / Tr					
Indexable inserts basic shape	✓				
Tolerance	2B / 3B / 4H / 6HX	3B / 6HX	6HX	6HX / NORMAL	6HX / NORMAL
Coolant supply	External	External	External	External	External / axial
Chamfer form	C	C	C	E	C
Coating / grade	TiCN / uncoated	ACN	uncoated	THL / uncoated	THL / TiN/VAP
Cutting tool material	HSS-E-PM	HSS-E-PM	HSS-E-PM	HSS-E	HSS-E
P Steel	●●		●	●	●●
M Stainless steel				●	●●
K Cast iron			●	●	●●
N NF metals	●			●	●
S Materials with difficult cutting properties	●●	●●			●
H Hard materials					
O Other					●
Page in catalogue	C 262	C 120	C 81	C 233	C 229
QR code					
www.walter-tools.com/woc/	paradur-ti	paradur-ti-plus	paradur-h-24	paradur-ste	paradur-synchrospeed

C1

HSS-E (-PM) taps

Machining					
Thread depth	2,5 x D _N	2,5 x D _N	2,5 x D _N	3 x D _N	3 x D _N




Designation	Paradur® X-pert M	TC121 Supreme	TC122 Supreme	KMB WST	Paradur® Eco CI
Thread type					
M	✓	✓	✓	✓	✓
MF	✓				✓
UNC / UNF / UN-8	✓				
G / Rc / Rp	✓				
MJ / UNJC / UNJF					
NPT / NPTF					
Pg / BSW / Tr					
Indexable inserts basic shape	✓				
Tolerance	2B / 3B / 6GX / 6HMOD / 6HX / NORMAL	6HX	6HX	6H	6HX
Coolant supply	External	External / axial	axial	External	axial / radial
Chamfer form	C	C	C	C	C / E
Coating / grade	THL / TiCN / TiN / VAP	WW60RG / WY80BD	WW60BC	uncoated	TiCN
Cutting tool material	HSS-E	HSS-E-PM	HSS-E-PM	HSS-E	HSS-E-PM
P Steel	●	●●	●●	●●	
M Stainless steel	●●	●			
K Cast iron		●	●	●	●●
N NF metals		●		●	●●
S Materials with difficult cutting properties					
H Hard materials					
O Other					●●
Page in catalogue	C 267	C 84	C 87	C 53	C 108
QR code					
www.walter-tools.com/woc/	paradur-xpert-m	TC121	TC122	kmb-wst	paradur-eco-ci

C1

HSS-E (-PM) taps

Machining



Thread depth	3 x D _N				
--------------	--------------------	--------------------	--------------------	--------------------	--------------------



Designation	Paradrur® Eco Plus	Paradrur® Uni	Paradrur® WLM Synchrospeed	Paradrur® X-pert N	Paradrur® X-pert P
Thread type					
M	✓	✓	✓	✓	✓
MF	✓	✓		✓	✓
UNC / UNF / UN-8	✓			✓	✓
G / Rc / Rp	✓	✓		✓	✓
MJ / UNJC / UNJF					
NPT / NPTF					
Pg / BSW / Tr					✓
Indexable inserts basic shape				✓	✓
Tolerance	2B / 6GX / 6HX / NORMAL	6G / 6H / NORMAL	6H	2B / 3B / 6G / 6H / 6HMOD / NORMAL	2B / 3B / 4H / 6G / 6H / 6HMOD / 7G / MEDIUM / NORMAL
Coolant supply	External / axial / radial	External	External	External	External
Chamfer form	C / E	C	C	C	C
Coating / grade	THL / TIN	TIN / VAP / uncoated	CRN / uncoated	uncoated	THL / TIN / uncoated
Cutting tool material	HSS-E-PM	HSS-E	HSS-E	HSS-E	HSS-E
P Steel	●●	●●	●		●●
M Stainless steel	●●				
K Cast iron	●●	●			
N NF metals	●●	●	●●	●●	●
S Materials with difficult cutting properties			●●	●	
H Hard materials					
O Other			●●	●	●
Page in catalogue	C 228	C 239	C 114	C 268	C 258
QR code					
www.walter-tools.com/woc/	paradrur-eco-plus	paradrur-uni	paradrur-wlm-synchrospeed	paradrur-xpert-n	paradrur-xpert-p

HSS-E (-PM) taps

Machining					
-----------	--	--	--	--	--

Thread depth	3 x D _N	3,5 x D _N			
--------------	--------------------	--------------------	--------------------	--------------------	----------------------





Designation	Paradur® X-pert P AZ	TC115 Perform	TC120 Supreme	TC142 Supreme	Paradur® NH
Thread type					
M	✓	✓	✓	✓	✓
MF		✓		✓	
UNC / UNF / UN-8		✓			
G / Rc / Rp				✓	
MJ / UNJC / UNJF					
NPT / NPTF					
Pg / BSW / Tr					
Indexable inserts basic shape					
Tolerance	6H	2B / 6H	6HX	6HX / NORMAL	6H
Coolant supply	External	External	External / axial	External	axial
Chamfer form	C	C / E	C	C	C
Coating / grade	uncoated	WY80AA / WY80FC	WW60AG	WW60RB / WY80FC	TIN / uncoated
Cutting tool material	HSS-E	HSS-E	HSS-E-PM	HSS-E / HSS-E-PM	HSS-E
P Steel	●●	●●	●●	●	●●
M Stainless steel		●●		●●	
K Cast iron		●●			●●
N NF metals	●	●	●		●
S Materials with difficult cutting properties					
H Hard materials					
O Other	●				●
Page in catalogue	C 94	C 67	C 82	C 234	C 80
QR code					
www.walter-tools.com/woc/	paradur-xpert-p-az	TC115	TC120	TC142	paradur-nh

C1

HSS-E (-PM) taps

Machining



Thread depth

 3,5 x D_N

 3,5 x D_N

C1



Designation	Paradur® Short Chip HT	TC130 Supreme	TC115 Perform	TC216 Perform
Thread type				
M	✓	✓		
MF	✓	✓		
UNC / UNF / UN-8		✓		
G / Rc / Rp				
MJ / UNJC / UNJF				
NPT / NPTF				
Pg / BSW / Tr				
Indexable inserts basic shape				
Tolerance	6HX	2BX / 6HX		
Coolant supply	axial	axial	External	External
Chamfer form	C	C		
Coating / grade	THL / uncoated	WY80AA / WY80EH	WY80AA / WY80FC	WY80AA / WY80FC
Cutting tool material	HSS-E	HSS-E		
P Steel	●●	●●	●●	●●
M Stainless steel			●●	●●
K Cast iron	●	●●	●●	●●
N NF metals	●	●	●	●●
S Materials with difficult cutting properties				
H Hard materials				
O Other		●		
Page in catalogue	C 97	C 76	C 69	C 26
QR code				
www.walter-tools.com/woc/	paradur-short-chip-ht	TC130		

HSS-E PM machine taps

mm

Prototex® Eco Plus



- For long-chipping materials

$\leq 3,5 \times D_N$

$B=3,5-5$

42HRC
1350
-500
N/mm²

M
DIN 13

6HX

	P	M	K	N	S	H	O
THL	●●	●●	●●	●●			
TIN	●●	●●	●●	●●			

DIN 371	Designation	Designation	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	□	l_9 mm	N
	THL	TIN									
	EP2021302-M2	EP2021305-M2	M 2	0,4	45	6	9	2,8	2,1	5	3
	EP2021302-M2.5	EP2021305-M2.5	M 2.5	0,45	50	8	12,5	2,8	2,1	5	3
	EP2021302-M3	EP2021305-M3	M 3	0,5	56	9	18	3,5	2,7	6	3
	EP2021302-M4	EP2021305-M4	M 4	0,7	63	12	21	4,5	3,4	6	3
	EP2021302-M5	EP2021305-M5	M 5	0,8	70	13	25	6	4,9	8	3
	EP2021302-M6	EP2021305-M6	M 6	1	80	15	30	6	4,9	8	3
	EP2021302-M8	EP2021305-M8	M 8	1,25	90	18	35	8	6,2	9	3
	EP2021302-M10	EP2021305-M10	M 10	1,5	100	20	39	10	8	11	3

DIN 376	Designation	Designation	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	□	l_9 mm	N
	THL	TIN									
	EP2026302-M12	EP2026305-M12	M 12	1,75	110	23	83	9	7	10	4
	EP2026302-M14	EP2026305-M14	M 14	2	110	25	81	11	9	12	4
	EP2026302-M16	EP2026305-M16	M 16	2	110	25	68	12	9	12	4
	EP2026302-M18	EP2026305-M18	M 18	2,5	125	30	81	14	11	14	4
	EP2026302-M20	EP2026305-M20	M 20	2,5	140	30	95	16	12	15	4
	EP2026302-M24	EP2026305-M24	M 24	3	160	36	113	18	14,5	17	4
	EP2026302-M27		M 27	3	160	36	97	20	16	19	4
	EP2026302-M30		M 30	3,5	180	42	115	22	18	21	4

C1

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E PM machine taps

mm

Prototex® Eco Plus



– For long-chipping materials



	P	M	K	N	S	H	O
THL	●●	●●	●●	●●			

DIN 371	Designation THL	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	EP2021342-M6	M 6	1	80	15	30	6	4,9	8	3
	EP2021342-M8	M 8	1,25	90	18	35	8	6,2	9	3
	EP2021342-M10	M 10	1,5	100	20	39	10	8	11	3

DIN 376	Designation THL	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	EP2026342-M12	M 12	1,75	110	23	83	9	7	10	4
	EP2026342-M16	M 16	2	110	25	68	12	9	12	4

C1

WALTER SELECT	●● Primary application ● Other application	
	Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions	


HSS-E PM machine taps

mm

Prototex® Eco Plus



– For long-chipping materials



	P	M	K	N	S	H	O
THL	●●	●●	●●	●●			

DIN 371		Designation THL	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N
	EP2021382-M3	M 3	0,5	56	9	18	3,5	2,7	6	3
	EP2021382-M4	M 4	0,7	63	12	21	4,5	3,4	6	3
	EP2021382-M5	M 5	0,8	70	13	25	6	4,9	8	3
	EP2021382-M6	M 6	1	80	15	30	6	4,9	8	3
	EP2021382-M8	M 8	1,25	90	18	35	8	6,2	9	3
	EP2021382-M10	M 10	1,5	100	20	39	10	8	11	3

DIN 376		Designation THL	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N
	EP2026382-M12	M 12	1,75	110	23	83	9	7	10	4
	EP2026382-M16	M 16	2	110	25	68	12	9	12	4
	EP2026382-M20	M 20	2,5	140	30	95	16	12	15	4

C1

●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


HSS-E PM machine taps

mm

Prototex® Eco Plus




– For long-chipping materials




	P	M	K	N	S	H	O
THL	●●	●●	●●	●●			
TIN	●●	●●	●●	●●			

DIN 371

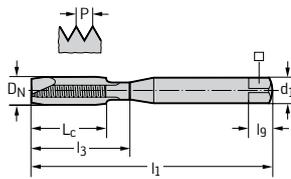

Designation THL	Designation TIN	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N
EP2023302-M2	EP2023305-M2	M 2	0,4	45	6	9	2,8	2,1	3
EP2023302-M2.5	EP2023305-M2.5	M 2.5	0,45	50	8	12,5	2,8	2,1	3
EP2023302-M3	EP2023305-M3	M 3	0,5	56	9	18	3,5	2,7	3
EP2023302-M4	EP2023305-M4	M 4	0,7	63	12	21	4,5	3,4	3
EP2023302-M5	EP2023305-M5	M 5	0,8	70	13	25	6	4,9	3
EP2023302-M6	EP2023305-M6	M 6	1	80	15	30	6	4,9	3
EP2023302-M8	EP2023305-M8	M 8	1,25	90	18	35	8	6,2	3
EP2023302-M10	EP2023305-M10	M 10	1,5	100	20	39	10	8	3

DIN 376

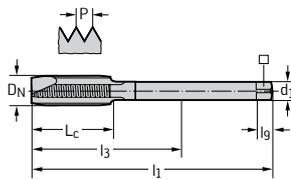

Designation THL	Designation TIN	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N
EP2028302-M12	EP2028305-M12	M 12	1,75	110	23	83	9	7	4
EP2028302-M14	EP2028305-M14	M 14	2	110	25	81	11	9	4
EP2028302-M16	EP2028305-M16	M 16	2	110	25	68	12	9	4

HSS-E machine taps

TC216 Perform



- For long-chipping materials

\leq
 $3 \times D_N$

B=3,5-5

32HRC
 1000
 -350
 N/mm²

M
 DIN 13

ISO2/6H

	P	M	K	N	S	H	O
WY80AA	●●	●●	●●	●●			
WY80FC	●●	●●	●●	●●			

DIN 371	Designation WY80AA	Designation WY80FC	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC216-M1.6-C0-	TC216-M1.6-C0-	M 1.6	0,35	40	7	7	2,5	2,1	5	2
	TC216-M2-C0-	TC216-M2-C0-	M 2	0,4	45	6	9	2,8	2,1	5	2
	TC216-M2.5-C0-	TC216-M2.5-C0-	M 2.5	0,45	50	8	12,5	2,8	2,1	5	2
	TC216-M3-C0-	TC216-M3-C0-	M 3	0,5	56	9	18	3,5	2,7	6	2
	TC216-M4-C0-	TC216-M4-C0-	M 4	0,7	63	12	21	4,5	3,4	6	3
	TC216-M5-C0-	TC216-M5-C0-	M 5	0,8	70	13	25	6	4,9	8	3
	TC216-M6-C0-	TC216-M6-C0-	M 6	1	80	15	30	6	4,9	8	3
	TC216-M8-C0-	TC216-M8-C0-	M 8	1,25	90	18	35	8	6,2	9	3
	TC216-M10-C0-	TC216-M10-C0-	M 10	1,5	100	20	39	10	8	11	3

Ordering example for the grade WY80AA: TC216-M1.6-C0-WY80AA

DIN 376	Designation WY80AA	Designation WY80FC	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC216-M12-L0-	TC216-M12-L0-	M 12	1,75	110	23	83	9	7	10	3
	TC216-M14-L0-	TC216-M14-L0-	M 14	2	110	25	81	11	9	12	4
	TC216-M16-L0-	TC216-M16-L0-	M 16	2	110	25	68	12	9	12	4
	TC216-M20-L0-	TC216-M20-L0-	M 20	2,5	140	30	95	16	12	15	4

Ordering example for the grade WY80AA: TC216-M12-L0-WY80AA

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E tap set 1

TC216 Perform




\leq 3×DN	B=3,5-5 	32HRC 1000 -350 N/mm ²
----------------	-------------	--

- Universal tap set

M
DIN 13

ISO2/6H



	P	M	K	N	S	H	O
WY80AA	●●	●●	●●	●●			
WY80FC	●●	●●	●●	●●			

Tool				WY80AA	WY80FC
Designation	D _N	Quantity			
TC216-SET1-M3-M12-	M 3 – M 12	7		☹	☹

Bodies and assembly parts are included in the scope of delivery
Ordering example for the grade WY80AA: TC216-SET1-M3-M12-WY80AA

C1

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = ☹ machining conditions

HSS-E tap set 2

TC216 Perform



- Universal tap set
- Incl. Core-hole drill

\leq 3×D _N	B=3,5-5 	32HRC 1000 -350 N/mm ²
----------------------------	-------------	--

M DIN 13	ISO2/6H	
--------------------	---------	--

	P	M	K	N	S	H	O
WY80AA	●●	●●	●●	●●			
WY80FC	●●	●●	●●	●●			

Tool						WY80AA	WY80FC
Designation	D _N	Sets dia. mm	Sets dia. mm	Quantity			
TC216-SET2-M3-M12-	M 3 – M 12	2,5	10,2	14			

Bodies and assembly parts are included in the scope of delivery
 Ordering example for the grade WY80AA: TC216-SET2-M3-M12-WY80AA

C1

WALTER SELECT	●● Primary application ● Other application Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions		
----------------------	---	--	--

HSS-E machine taps

mm

Prototex® Synchronspeed



- For long-chipping materials
- Only for synchronous machining (rigid tapping)

\leq
3×DN

B=3,5-5

44HRC
 1400
 N/mm²

M
DIN 13

6HX

	P	M	K	N	S	H	O
THL	●●	●●	●●	●●	●●		●●
TIN	●●	●●	●●	●●	●●		●●

~DIN 371	Designation	Designation	D _N	P	l ₁	L _c	l ₃	d ₁	h6	□	l ₉	N
	THL	TIN										
	S2021302-M2	S2021305-M2	M 2	0,4	70	4	9	6	4,9	8	3	
	S2021302-M2.5	S2021305-M2.5	M 2.5	0,45	70	5	12,5	6	4,9	8	3	
	S2021302-M3	S2021305-M3	M 3	0,5	70	5	18	6	4,9	8	3	
	S2021302-M4	S2021305-M4	M 4	0,7	70	7	21	6	4,9	8	3	
	S2021302-M5	S2021305-M5	M 5	0,8	70	8	25	6	4,9	8	3	
	S2021302-M6	S2021305-M6	M 6	1	80	10	30	6	4,9	8	3	
	S2021302-M8	S2021305-M8	M 8	1,25	90	13	35	8	6,2	9	3	
	S2021302-M10	S2021305-M10	M 10	1,5	100	15	39	10	8	11	3	

~DIN 376	Designation	Designation	D _N	P	l ₁	L _c	l ₃	d ₁	h6	□	l ₉	N
	THL	TIN										
	S2026302-M12	S2026305-M12	M 12	1,75	110	18	68	12	9	12	3	
	S2026302-M14	S2026305-M14	M 14	2	110	20	66	14	11	14	3	
	S2026302-M16	S2026305-M16	M 16	2	110	20	65	16	12	15	4	
	S2026302-M20	S2026305-M20	M 20	2,5	140	25	95	16	12	15	4	
	S2026302-M24	S2026305-M24	M 24	3	160	30	97	20	16	19	4	

C1

WALTER
SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E machine taps

mm

Prototex® OS



- For long-chipping materials

M
DIN 13

ISO2/6H

$\leq 1 \times D_N$

B=3,5-5

14HRC
700
-200
N/mm²

	P	M	K	N	S	H	O
uncoated	●●			●			

DIN 371	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	20211-M1	M 1	0,25	40	5	5	2,5	2,1	5	2
	20211-M1.2	M 1.2	0,25	40	5	5	2,5	2,1	5	2
	20211-M1.4	M 1.4	0,3	40	7	6,5	2,5	2,1	5	2
	20211-M1.6	M 1.6	0,35	40	7	7	2,5	2,1	5	2
	20211-M1.7	M 1.7	0,35	40	7	7	2,5	2,1	5	2
	20211-M1.8	M 1.8	0,35	40	7	7	2,5	2,1	5	2
	20211-M2	M 2	0,4	45	6	9	2,8	2,1	5	2
	20211-M2.5	M 2.5	0,45	50	8	12,5	2,8	2,1	5	2
	20211-M2.6	M 2.6	0,45	50	8	12,5	2,8	2,1	5	2
	20211-M3	M 3	0,5	56	9	18	3,5	2,7	6	2
	20211-M4	M 4	0,7	63	12	21	4,5	3,4	6	2
	20211-M5	M 5	0,8	70	13	25	6	4,9	8	2
	20211-M6	M 6	1	80	15	30	6	4,9	8	3
	20211-M8	M 8	1,25	90	18	35	8	6,2	9	3
	20211-M10	M 10	1,5	100	20	39	10	8	11	3

≤ M 1.4: 5H
 ≤ M 1.8: Without reduced neck after the thread

C1

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


HSS-E machine taps

mm

Paradur® N




- For long-chipping materials




	P	M	K	N	S	H	O
uncoated	●●		●●	●●			

DIN 371

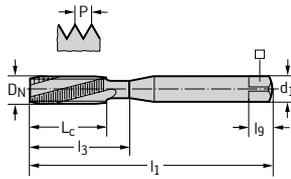

Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
20411-M3	M 3	0,5	56	9	18	3,5	2,7	6	3
20411-M4	M 4	0,7	63	12	21	4,5	3,4	6	3
20411-M5	M 5	0,8	70	13	25	6	4,9	8	3
20411-M6	M 6	1	80	15	30	6	4,9	8	3

DIN 376

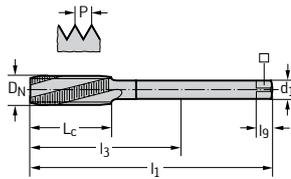

Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
20461-M6	M 6	1	80	15	59	4,5	3,4	6	3
20461-M8	M 8	1,25	90	18	67	6	4,9	8	3
20461-M10	M 10	1,5	100	20	77	7	5,5	8	3
20461-M12	M 12	1,75	110	23	83	9	7	10	3

C1

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E machine taps

mm

Prototex® X-pert P



- Reduced number of grooves
- For long-chipping materials

$\leq 3 \times D_N$

$B=3,5-5$

32HRC
 1000-200
 N/mm²

M
DIN 13

ISO1/4H

	P	M	K	N	S	H	O
uncoated	●●			●			●

DIN 371	Designation unbeschichtet	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	□	l_g mm	N
	P20200-M1.6	M 1.6	0,35	40	7	7	2,5	2,1	5	2
	P20200-M2	M 2	0,4	45	6	9	2,8	2,1	5	2
	P20200-M2.2	M 2.2	0,45	45	7	12	2,8	2,1	5	2
	P20200-M2.5	M 2.5	0,45	50	8	12,5	2,8	2,1	5	2
	P20200-M3	M 3	0,5	56	9	18	3,5	2,7	6	2
	P20200-M3.5	M 3.5	0,6	56	11	20	4	3	6	2
	P20200-M4	M 4	0,7	63	12	21	4,5	3,4	6	2
	P20200-M5	M 5	0,8	70	13	25	6	4,9	8	2
	P20200-M6	M 6	1	80	15	30	6	4,9	8	2
	P20200-M8	M 8	1,25	90	18	35	8	6,2	9	3
P20200-M10	M 10	1,5	100	20	39	10	8	11	3	


M 1.6: Without reduced neck after the thread

C1



HSS-E machine taps

mm

Prototex® X-pert P




- For long-chipping materials



	P	M	K	N	S	H	O
uncoated	●●			●			●
TIN	●●			●			●
TICN	●●			●			●

DIN 371

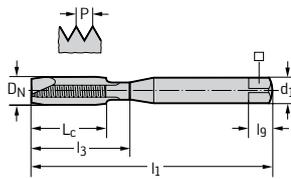


Designation TICN	Designation TIN	Designation unbeschichtet	DN	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l ₉ mm	N
P2031006-M2	P2031005-M2	P20310-M2	M 2	0,4	45	6	9	2,8	2,1	5	3
	P2031005-M2.2	P20310-M2.2	M 2.2	0,45	45	7	12	2,8	2,1	5	3
P2031006-M2.5	P2031005-M2.5	P20310-M2.5	M 2.5	0,45	50	8	12,5	2,8	2,1	5	3
P2031006-M3	P2031005-M3	P20310-M3	M 3	0,5	56	9	18	3,5	2,7	6	3
		P20310-M3.5	M 3.5	0,6	56	11	20	4	3	6	3
P2031006-M4	P2031005-M4	P20310-M4	M 4	0,7	63	12	21	4,5	3,4	6	3
P2031006-M5	P2031005-M5	P20310-M5	M 5	0,8	70	13	25	6	4,9	8	3
P2031006-M6	P2031005-M6	P20310-M6	M 6	1	80	15	30	6	4,9	8	3
	P2031005-M7	P20310-M7	M 7	1	80	15	30	7	5,5	8	3
P2031006-M8	P2031005-M8	P20310-M8	M 8	1,25	90	18	35	8	6,2	9	3
P2031006-M10	P2031005-M10	P20310-M10	M 10	1,5	100	20	39	10	8	11	3

l₉ dimensions in accordance with DIN 10

C1

WALTER SELECT ●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

DIN 376

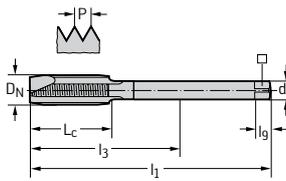

Cylindrical shank

Designation TiCN	Designation TiN	Designation unbeschichtet	DN	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l ₉ mm	N
		P20360-M2	M 2	45	6	26	1,4	1,1	4	3
		P20360-M2.5	M 2.5	50	8	31	1,8	1,4	4	3
		P20360-M3	M 3	56	9	37	2,2	1,8	4	3
		P20360-M4	M 4	63	12	43	2,8	2,1	5	3
		P20360-M5	M 5	70	13	49	3,5	2,7	6	3
P2036006-M6	P2036005-M6	P20360-M6	M 6	80	15	59	4,5	3,4	6	3
		P20360-M7	M 7	80	15	58	5,5	4,3	7	3
P2036006-M8	P2036005-M8	P20360-M8	M 8	90	18	67	6	4,9	8	3
		P20360-M9	M 9	90	18	67	7	5,5	8	3
P2036006-M10	P2036005-M10	P20360-M10	M 10	100	20	77	7	5,5	8	3
P2036006-M12	P2036005-M12	P20360-M12	M 12	110	23	83	9	7	10	3
	P2036005-M14	P20360-M14	M 14	110	25	81	11	9	12	3
P2036006-M16	P2036005-M16	P20360-M16	M 16	110	25	68	12	9	12	3
	P2036005-M18	P20360-M18	M 18	125	30	81	14	11	14	4
P2036006-M20	P2036005-M20	P20360-M20	M 20	140	30	95	16	12	15	4
		P20360-M22	M 22	140	30	93	18	14,5	17	4
P2036006-M24	P2036005-M24	P20360-M24	M 24	160	36	113	18	14,5	17	4
	P2036005-M27	P20360-M27	M 27	160	36	97	20	16	19	4
P2036006-M30	P2036005-M30	P20360-M30	M 30	180	42	115	22	18	21	4
		P20360-M33	M 33	180	42	113	25	20	23	4
	P2036005-M36	P20360-M36	M 36	200	48	131	28	22	25	4
		P20360-M39	M 39	200	48	102	32	24	27	4
		P20360-M42	M 42	200	54	102	32	24	27	4
		P20360-M45	M 45	220	54	117	36	29	32	4
		P20360-M48	M 48	250	60	147	36	29	32	4
		P20360-M52	M 52	250	60	120	40	32	35	4
		P20360-M56	M 56	250	66	120	40	32	35	4

l₉ dimensions in accordance with DIN 10

C1


HSS-E machine taps

mm

Prototex® X-pert P




- Reduced number of grooves
- For long-chipping materials




M
DIN 13

ISO2/6H



	P	M	K	N	S	H	O
uncoated	●●			●			●
TIN	●●			●			●

DIN 371

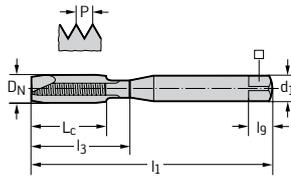

Designation TIN	Designation unbeschichtet	DN	P mm	l ₁ mm	l _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	P20210-M1	M 1	0,25	40	5	5	2,5	2,1	5	2
P2021005-M1.2	P20210-M1.2	M 1.2	0,25	40	5	5	2,5	2,1	5	2
P2021005-M1.4	P20210-M1.4	M 1.4	0,3	40	7	6,5	2,5	2,1	5	2
P2021005-M1.6	P20210-M1.6	M 1.6	0,35	40	7	7	2,5	2,1	5	2
	P20210-M1.8	M 1.8	0,35	40	7	7	2,5	2,1	5	2
P2021005-M2	P20210-M2	M 2	0,4	45	6	9	2,8	2,1	5	2
	P20210-M2.2	M 2.2	0,45	45	7	12	2,8	2,1	5	2
	P20210-M2.3	M 2.3	0,4	45	7	12	2,8	2,1	5	2
P2021005-M2.5	P20210-M2.5	M 2.5	0,45	50	8	12,5	2,8	2,1	5	2
	P20210-M2.6	M 2.6	0,45	50	8	12,5	2,8	2,1	5	2
P2021005-M3	P20210-M3	M 3	0,5	56	9	18	3,5	2,7	6	2
P2021005-M3.5	P20210-M3.5	M 3.5	0,6	56	11	20	4	3	6	2
P2021005-M4	P20210-M4	M 4	0,7	63	12	21	4,5	3,4	6	2
	P20210-M4.5	M 4.5	0,75	70	13	25	6	4,9	8	2
P2021005-M5	P20210-M5	M 5	0,8	70	13	25	6	4,9	8	2
P2021005-M6	P20210-M6	M 6	1	80	15	30	6	4,9	8	2

- ≤ M 1.4: 5H
- ≤ M 1.8: Without reduced neck after the thread
- ≤ M 1.6: Without reduced neck after the thread

C1

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


HSS-E machine taps

mm

Prototex® X-pert P



– For long-chipping materials



	P	M	K	N	S	H	O
uncoated	●●			●			●

DIN 371		Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	P202108-M2	M 2	0,4	45	6	9	2,8	2,1	5	2	
	P202108-M3	M 3	0,5	56	9	18	3,5	2,7	6	2	
	P202108-M4	M 4	0,7	63	12	21	4,5	3,4	6	2	
	P202108-M5	M 5	0,8	70	13	25	6	4,9	8	2	
	P202108-M6	M 6	1	80	15	30	6	4,9	8	3	
	P202108-M8	M 8	1,25	90	18	35	8	6,2	9	3	
	P202108-M10	M 10	1,5	100	20	39	10	8	11	3	

DIN 376		Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	P202608-M12	M 12	1,75	110	23	83	9	7	10	3	
	P202608-M16	M 16	2	110	25	68	12	9	12	3	
	P202608-M20	M 20	2,5	140	30	95	16	12	15	3	

C1

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions



HSS-E machine taps

mm

Prototex® X-pert P



- For long-chipping materials

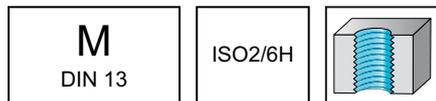

	P	M	K	N	S	H	O
uncoated	●●			●			●
TIN	●●			●			●

~DIN 371 L	Designation	Designation	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	□	l_9 mm	N
	TIN	unbeschichtet									
	P2031035-M3	P203103-M3	M 3	0,5	112	9	18	3,5	2,7	6	3
	P2031035-M4	P203103-M4	M 4	0,7	112	12	21	4,5	3,4	6	3
	P2031035-M5	P203103-M5	M 5	0,8	125	13	25	6	4,9	8	3
	P2031035-M6	P203103-M6	M 6	1	125	15	30	6	4,9	8	3
	P2031035-M8	P203103-M8	M 8	1,25	140	18	40	8	6,2	9	3
	P2031035-M10	P203103-M10	M 10	1,5	160	20	50	10	8	11	3

~DIN 376 L	Designation	Designation	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	□	l_9 mm	N
	TIN	unbeschichtet									
		P203603-M3	M 3	0,5	112	9	86	2,2	1,8	4	3
		P203603-M4	M 4	0,7	112	12	92	2,8	2,1	5	3
	P2036035-M5	P203603-M5	M 5	0,8	125	13	104	3,5	2,7	6	3
	P2036035-M6	P203603-M6	M 6	1	125	15	104	4,5	3,4	6	3
	P2036035-M8	P203603-M8	M 8	1,25	140	18	117	6	4,9	8	3
	P2036035-M10	P203603-M10	M 10	1,5	160	20	137	7	5,5	8	3
	P2036035-M12	P203603-M12	M 12	1,75	180	23	153	9	7	10	3
	P2036035-M14	P203603-M14	M 14	2	180	25	151	11	9	12	3
	P2036035-M16	P203603-M16	M 16	2	200	25	158	12	9	12	3
	P2036035-M20	P203603-M20	M 20	2,5	224	30	179	16	12	15	4

C1

**WALTER
SELECT**

●● Primary application


● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


HSS-E machine taps

mm

Prototex® X-pert P



- For long-chipping materials



	P	M	K	N	S	H	O
uncoated	●●			●			●

~DIN 371 XL		Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
		P202103-M4	M 4	0,7	125	12	21	4,5	3,4	6	3
		P202103-M5	M 5	0,8	140	13	25	6	4,9	8	3
		P202103-M6	M 6	1	160	15	30	6	4,9	8	3

~DIN 376 L		Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
		P202603-M8	M 8	1,25	180	18	157	6	4,9	8	3
		P202603-M10	M 10	1,5	200	20	177	7	5,5	8	3
		P202603-M12	M 12	1,75	220	23	193	9	7	10	3
		P202603-M14	M 14	2	220	25	191	11	9	12	3
		P202603-M16	M 16	2	220	25	178	12	9	12	3
		P202603-M20	M 20	2,5	280	30	235	16	12	15	4

C1

**WALTER
SELECT**

●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E machine taps

mm

Prototex® X-pert P AZ



- For long-chipping materials
- For thin-walled workpieces

$\leq 3 \times D_N$

M
DIN 13

ISO2/6H

uncoated

P	M	K	N	S	H	O
●●		●●	●●			●

DIN 371		Designation unbeschichtet	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N
	P40310-M3	M 3	0,5	56	9	18	3,5	2,7	6	3
	P40310-M4	M 4	0,7	63	12	21	4,5	3,4	6	3
	P40310-M5	M 5	0,8	70	13	25	6	4,9	8	3
	P40310-M6	M 6	1	80	15	30	6	4,9	8	3
	P40310-M8	M 8	1,25	90	18	35	8	6,2	9	3
	P40310-M10	M 10	1,5	100	20	39	10	8	11	3

DIN 376		Designation unbeschichtet	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N
	P40360-M12	M 12	1,75	110	23	83	9	7	10	3
	P40360-M14	M 14	2	110	25	81	11	9	12	3
	P40360-M16	M 16	2	110	25	68	12	9	12	3
	P40360-M20	M 20	2,5	140	30	95	16	12	15	4

C1

WALTER SELECT

 ●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E machine taps

mm

Prototex® X-pert P



- For long-chipping materials

$\leq 3 \times D_N$

B=3,5-5


32HRC
1000-200 N/mm²

M
DIN 13

ISO3/6G


	P	M	K	N	S	H	O
uncoated	●●			●			●
TIN	●●			●			●

DIN 371

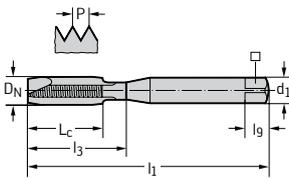

Designation TIN	Designation unbeschichtet	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	\square	l_9 mm	N
	P20330-M2.5	M 2.5	0,45	50	8	12,5	2,8	2,1	5	3
	P20330-M3	M 3	0,5	56	9	18	3,5	2,7	6	3
	P20330-M3.5	M 3.5	0,6	56	11	20	4	3	6	3
	P20330-M4	M 4	0,7	63	12	21	4,5	3,4	6	3
	P20330-M5	M 5	0,8	70	13	25	6	4,9	8	3
P2033005-M6	P20330-M6	M 6	1	80	15	30	6	4,9	8	3
	P20330-M7	M 7	1	80	15	30	7	5,5	8	3
P2033005-M8	P20330-M8	M 8	1,25	90	18	35	8	6,2	9	3
P2033005-M10	P20330-M10	M 10	1,5	100	20	39	10	8	11	3

DIN 376

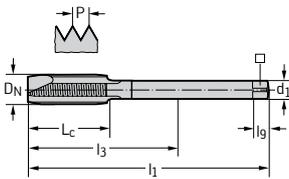

Designation unbeschichtet	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	\square	l_9 mm	N
P20380-M5	M 5	0,8	70	13	49	3,5	2,7	6	3
P20380-M6	M 6	1	80	15	59	4,5	3,4	6	3
P20380-M8	M 8	1,25	90	18	67	6	4,9	8	3
P20380-M10	M 10	1,5	100	20	77	7	5,5	8	3
P20380-M12	M 12	1,75	110	23	83	9	7	10	3
P20380-M14	M 14	2	110	25	81	11	9	12	3
P20380-M16	M 16	2	110	25	68	12	9	12	3
P20380-M20	M 20	2,5	140	30	95	16	12	15	4
P20380-M24	M 24	3	160	36	113	18	14,5	17	4

**WALTER
SELECT**

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E machine taps

mm

Prototex® X-pert P




- Reduced number of grooves
- For long-chipping materials

$\leq 3 \times D_N$


M
DIN 13

ISO3/6G



	P	M	K	N	S	H	O
uncoated	●●			●			●
TIN	●●			●			●

DIN 371

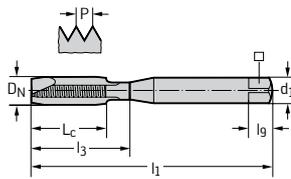

Designation TIN	Designation unbeschichtet	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	\square	l_g mm	N
P2023005-M2	P20230-M2	M 2	0,4	45	6	9	2,8	2,1	5	2
	P20230-M2.3	M 2.3	0,4	45	7	12	2,8	2,1	5	2
P2023005-M2.5	P20230-M2.5	M 2.5	0,45	50	8	12,5	2,8	2,1	5	2
	P20230-M2.6	M 2.6	0,45	50	8	12,5	2,8	2,1	5	2
P2023005-M3	P20230-M3	M 3	0,5	56	9	18	3,5	2,7	6	2
P2023005-M3.5	P20230-M3.5	M 3.5	0,6	56	11	20	4	3	6	2
P2023005-M4	P20230-M4	M 4	0,7	63	12	21	4,5	3,4	6	2
P2023005-M5	P20230-M5	M 5	0,8	70	13	25	6	4,9	8	2

C1

HSS-E machine taps

mm

Prototex® X-pert P



- For long-chipping materials

$\leq 3 \times D_N$

$B=3,5-5$

32HRC
 $1000-200$
 N/mm^2

M
DIN 13

7G

	P	M	K	N	S	H	O
uncoated	●●			●			●
TIN	●●			●			●

DIN 371		Designation TIN	Designation unbeschichtet	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_9 mm	N
	P2034005-M2	P20340-M2	M 2	0,4	45	6	11	2,8	2,1	5	3
	P2034005-M2.5	P20340-M2.5	M 2.5	0,45	50	8	12,5	2,8	2,1	5	3
		P20340-M2.6	M 2.6	0,45	50	8	14	2,8	2,1	5	3
	P2034005-M3	P20340-M3	M 3	0,5	56	9	18	3,5	2,7	6	3
	P2034005-M3.5	P20340-M3.5	M 3.5	0,6	56	11	20	4	3	6	3
	P2034005-M4	P20340-M4	M 4	0,7	63	12	21	4,5	3,4	6	3
	P2034005-M5	P20340-M5	M 5	0,8	70	13	25	6	4,9	8	3
	P2034005-M6	P20340-M6	M 6	1	80	15	30	6	4,9	8	3
	P2034005-M8	P20340-M8	M 8	1,25	90	18	35	8	6,2	9	3
	P2034005-M10	P20340-M10	M 10	1,5	100	20	39	10	8	11	3


DIN 376		Designation TIN	Designation unbeschichtet	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_9 mm	N
	P2039005-M12	P20390-M12	M 12	1,75	110	23	83	9	7	10	3
	P2039005-M16	P20390-M16	M 16	2	110	25	68	12	9	12	3
	P2039005-M20	P20390-M20	M 20	2,5	140	30	95	16	12	15	4

C1

HSS-E machine taps

mm

Paradur® X-pert M




- For long-chipping materials



	P	M	K	N	S	H	O
VAP	●	●●					
TIN	●	●●					
TICN	●	●●					

DIN 371

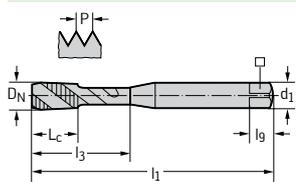


Designation TICN	Designation TIN	Designation VAP	DN	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l ₉ mm	N
		M20513-M1.6	M 1.6	0,35	40	6	6	2,5	2,1	5	3
		M20513-M1.7	M 1.7	0,35	40	6	6	2,5	2,1	5	3
		M20513-M1.8	M 1.8	0,35	40	6	6	2,5	2,1	5	3
M2051306-M2	M2051305-M2	M20513-M2	M 2	0,4	45	4	9	2,8	2,1	5	3
M2051306-M2.5	M2051305-M2.5	M20513-M2.5	M 2.5	0,45	50	4	12,5	2,8	2,1	5	3
M2051306-M3	M2051305-M3	M20513-M3	M 3	0,5	56	6	18	3,5	2,7	6	3
		M20513-M3.5	M 3.5	0,6	56	6,5	20	4	3	6	3
M2051306-M4	M2051305-M4	M20513-M4	M 4	0,7	63	7	21	4,5	3,4	6	3
		M20513-M4.5	M 4.5	0,75	70	8	25	6	4,9	8	3
M2051306-M5	M2051305-M5	M20513-M5	M 5	0,8	70	8	25	6	4,9	8	3
M2051306-M6	M2051305-M6	M20513-M6	M 6	1	80	10	30	6	4,9	8	3
		M20513-M7	M 7	1	80	10	30	7	5,5	8	3
M2051306-M8	M2051305-M8	M20513-M8	M 8	1,25	90	12	35	8	6,2	9	3
M2051306-M10	M2051305-M10	M20513-M10	M 10	1,5	100	15	39	10	8	11	3

≤ M 1.8: Without reduced neck after the thread

≤ M 2.5: Without thread taper

l₉ dimensions in accordance with DIN 10

DIN 376

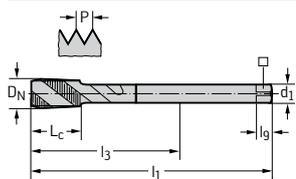

Designation TICN	Designation TIN	Designation VAP	DN	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l ₉ mm	N
M2056306-M6		M20563-M6	M 6	1	80	10	59	4,5	3,4	6	3
M2056306-M8		M20563-M8	M 8	1,25	90	12	67	6	4,9	8	3
M2056306-M10		M20563-M10	M 10	1,5	100	15	77	7	5,5	8	3
M2056306-M12	M2056305-M12	M20563-M12	M 12	1,75	110	16	83	9	7	10	4
		M20563-M14	M 14	2	110	20	81	11	9	12	4
M2056306-M16	M2056305-M16	M20563-M16	M 16	2	110	20	68	12	9	12	4
		M20563-M18	M 18	2,5	125	25	81	14	11	14	4
M2056306-M20	M2056305-M20	M20563-M20	M 20	2,5	140	25	95	16	12	15	4
		M20563-M22	M 22	2,5	140	25	93	18	14,5	17	4
M2056306-M24		M20563-M24	M 24	3	160	30	113	18	14,5	17	4
		M20563-M27	M 27	3	160	30	97	20	16	19	5
M2056306-M30		M20563-M30	M 30	3,5	180	35	115	22	18	21	5
		M20563-M33	M 33	3,5	180	35	113	25	20	23	5
		M20563-M36	M 36	4	200	40	131	28	22	25	5
		M20563-M42	M 42	4,5	200	45	102	32	24	27	5

l₉ dimensions in accordance with DIN 10

WALTER
SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


HSS-E machine taps

mm

Paradur® X-pert M



- For long-chipping materials



	P	M	K	N	S	H	O
VAP	●	●●					
TICN	●	●●					

DIN 371		Designation TICN	Designation VAP	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_2 mm	l_9 mm	N
	M2053306-M3	M20533-M3	M 3	0,5	56	6	18	3,5	2,7	6	3	
	M2053306-M4	M20533-M4	M 4	0,7	63	7	21	4,5	3,4	6	3	
	M2053306-M5	M20533-M5	M 5	0,8	70	8	25	6	4,9	8	3	
	M2053306-M6	M20533-M6	M 6	1	80	10	30	6	4,9	8	3	
	M2053306-M8	M20533-M8	M 8	1,25	90	12	35	8	6,2	9	3	
	M2053306-M10	M20533-M10	M 10	1,5	100	15	39	10	8	11	3	

C1

WALTER SELECT

 ●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


HSS-E machine taps

mm

Paradur® X-pert N



- For long-chipping materials



	P	M	K	N	S	H	O
uncoated				●●	●		●

DIN 371		Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	N20516-M1.6	M 1.6	0,35	40	6	6	2,5	2,1	5	2	
	N20516-M2	M 2	0,4	45	4	9	2,8	2,1	5	2	
	N20516-M2.3	M 2.3	0,4	45	4	12	2,8	2,1	5	2	
	N20516-M2.5	M 2.5	0,45	50	4	12,5	2,8	2,1	5	2	
	N20516-M3	M 3	0,5	56	6	18	3,5	2,7	6	2	
	N20516-M3.5	M 3.5	0,6	56	6,5	20	4	3	6	2	
	N20516-M4	M 4	0,7	63	7	21	4,5	3,4	6	2	
	N20516-M5	M 5	0,8	70	8	25	6	4,9	8	2	
	N20516-M6	M 6	1	80	10	30	6	4,9	8	2	
	N20516-M8	M 8	1,25	90	12	35	8	6,2	9	2	
N20516-M10	M 10	1,5	100	15	39	10	8	11	2		

DIN 376		Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	N20566-M6	M 6	1	80	10	59	4,5	3,4	6	2	
	N20566-M8	M 8	1,25	90	12	67	6	4,9	8	2	
	N20566-M10	M 10	1,5	100	15	77	7	5,5	8	2	
	N20566-M12	M 12	1,75	110	16	83	9	7	10	3	
	N20566-M14	M 14	2	110	20	81	11	9	12	3	
	N20566-M16	M 16	2	110	20	68	12	9	12	3	
	N20566-M20	M 20	2,5	140	25	95	16	12	15	3	

C1

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E PM machine taps

mm

Prototex® TiNi



- Recommended with oil
- For long-chipping materials

≤
2×DN

B=3,5-5

44HRC
1400
-700
N/mm²

M
DIN 13

4HX

	P	M	K	N	S	H	O
uncoated	●●	●●●		●	●●		

~DIN 371	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	202061-M2	M 2	0,4	45	8	8	2,8	2,1	5	2
	202061-M2.5	M 2.5	0,45	50	9	9	2,8	2,1	5	2
	202061-M3	M 3	0,5	56	10	10	3,5	2,7	6	2
	202061-M3.5	M 3.5	0,6	56	12	12	4	3	6	3
	202061-M4	M 4	0,7	63	13	13	4,5	3,4	6	3
	202061-M5	M 5	0,8	70	16	16	6	4,9	8	3
	202061-M6	M 6	1	80	15	23	6	4,9	8	3
	202061-M8	M 8	1,25	90	18	29,5	8	6,2	9	3
	202061-M10	M 10	1,5	100	20	33,5	10	8	11	3

C1

WALTER
SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E PM machine taps

mm

Prototex® TiNi



- Recommended with oil
- For long-chipping materials

$\leq 2 \times D_N$

M
DIN 13

6HX

	P	M	K	N	S	H	O
uncoated	●●	●●	●●	●●	●●	●●	●●
TiCN	●●	●●	●●	●●	●●	●●	●●

~DIN 371		Designation TiCN	Designation unbeschichtet	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_9 mm	N	
		202161-M1	M 1	0,25	40	5	5	2,5	2,1	5	2	
		202161-M1.2	M 1.2	0,25	40	5	5	2,5	2,1	5	2	
		202161-M1.4	M 1.4	0,3	40	5	5	2,5	2,1	5	2	
		202161-M1.6	M 1.6	0,35	40	5	5	2,5	2,1	5	2	
		202161-M1.8	M 1.8	0,35	40	5	5	2,5	2,1	5	2	
		2021616-M2	202161-M2	M 2	0,4	45	8	8	2,8	2,1	5	2
		2021616-M2.2	M 2.2	0,45	45	8	8	2,8	2,1	5	2	
		2021616-M2.5	202161-M2.5	M 2.5	0,45	50	9	9	2,8	2,1	5	2
		2021616-M3	202161-M3	M 3	0,5	56	10	10	3,5	2,7	6	2
		2021616-M3.5	202161-M3.5	M 3.5	0,6	56	12	12	4	3	6	3
	2021616-M4	202161-M4	M 4	0,7	63	13	13	4,5	3,4	6	3	
		202161-M4.5	M 4.5	0,75	70	13	13	6	4,9	8	3	
	2021616-M5	202161-M5	M 5	0,8	70	16	16	6	4,9	8	3	
	2021616-M6	202161-M6	M 6	1	80	15	23	6	4,9	8	3	
	2021616-M8	202161-M8	M 8	1,25	90	18	29,5	8	6,2	9	3	
	2021616-M10	202161-M10	M 10	1,5	100	20	33,5	10	8	11	3	

 $\leq M 1.4: 5HX$

DIN 376		Designation TiCN	Designation unbeschichtet	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_9 mm	N	
		2026616-M12	202661-M12	M 12	1,75	110	23	83	9	7	10	4
		2026616-M14	202661-M14	M 14	2	110	25	81	11	9	12	4
		2026616-M16	202661-M16	M 16	2	110	25	68	12	9	12	4
		2026616-M20	202661-M20	M 20	2,5	140	30	95	16	12	15	4
		2026616-M24	202661-M24	M 24	3	160	36	113	18	14,5	17	4

HSS-E PM machine taps

mm

Prototex® TiNi Plus



- Recommended with emulsion
- For long-chipping materials

$\leq 2 \times D_N$

$B=3,5-5$

44HRC
1400-700
N/mm²

M
DIN 13

6HX

	P	M	K	N	S	H	O
ACN					●●		

~DIN 371	Designation ACN	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	2021763-M2	M 2	0,4	45	8	8	2,8	2,1	5	2
	2021763-M2.5	M 2.5	0,45	50	9	9	2,8	2,1	5	2
	2021763-M3	M 3	0,5	56	10	10	3,5	2,7	6	2
	2021763-M3.5	M 3.5	0,6	56	12	12	4	3	6	3
	2021763-M4	M 4	0,7	63	13	13	4,5	3,4	6	3
	2021763-M5	M 5	0,8	70	16	16	6	4,9	8	3
	2021763-M6	M 6	1	80	15	23	6	4,9	8	3
	2021763-M8	M 8	1,25	90	18	29,5	8	6,2	9	3
	2021763-M10	M 10	1,5	100	20	33,5	10	8	11	3

DIN 376	Designation ACN	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	2026763-M12	M 12	1,75	110	23	83	9	7	10	4
	2026763-M16	M 16	2	110	25	68	12	9	12	4
	2026763-M20	M 20	2,5	140	30	95	16	12	15	4

C1

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


HSS-E PM machine taps

mm

Prototex® Sprint



- For long-chipping materials



	P	M	K	N	S	H	O
TIN	●	●	●	●	●	●	●
TICN	●	●	●	●	●	●	●

DIN 371	Designation TIN	Designation TIN	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	\square	l_g mm	N
	7021366-M3	7021365-M3	M 3	0,5	56	9	18	3,5	2,7	6	3
	7021366-M4	7021365-M4	M 4	0,7	63	12	21	4,5	3,4	6	3
	7021366-M5	7021365-M5	M 5	0,8	70	13	25	6	4,9	8	3
	7021366-M6	7021365-M6	M 6	1	80	15	30	6	4,9	8	3
	7021366-M8	7021365-M8	M 8	1,25	90	18	35	8	6,2	9	3
	7021366-M10	7021365-M10	M 10	1,5	100	20	39	10	8	11	3

DIN 376	Designation TIN	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	\square	l_g mm	N
	7026365-M12	M 12	1,75	110	23	83	9	7	10	3
	7026365-M14	M 14	2	110	25	81	11	9	12	3
	7026365-M16	M 16	2	110	25	68	12	9	12	3
	7026365-M20	M 20	2,5	140	30	95	16	12	15	3

C1

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


HSS-E PM machine taps

mm

Prototex® Megasprint




- For long-chipping materials




	P	M	K	N	S	H	O
TIN	●	●		●			

DIN 371

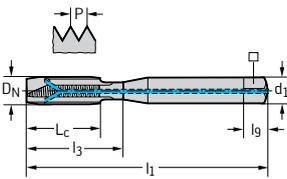

Designation TIN	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N
7021345-M6	M 6	1	80	15	30	6	4,9	3
7021345-M8	M 8	1,25	90	18	35	8	6,2	3
7021345-M10	M 10	1,5	100	20	39	10	8	3

DIN 376

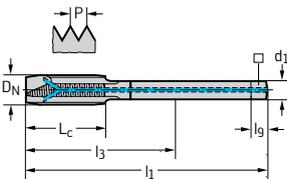

Designation TIN	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N
7026345-M12	M 12	1,75	110	23	83	9	7	3
7026345-M16	M 16	2	110	25	68	12	9	3
7026345-M20	M 20	2,5	140	30	95	16	15	3

C1

**WALTER
SELECT**

●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


HSS hand-held tap set

mm

HGB




- For long- and short-chipping materials



	P	M	K	N	S	H	O
uncoated	●	●	●	●	●	●	●

DIN 352

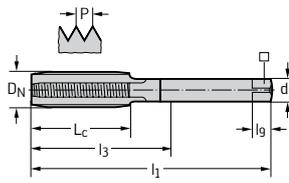

Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
30060-M2	M 2	0,4	36	8	8	2,8	2,1	5	3
30060-M2.5	M 2.5	0,45	40	9	9	2,8	2,1	5	3
30060-M3	M 3	0,5	40	9	13,5	3,5	2,7	6	3
30060-M4	M 4	0,7	45	11	16,5	4,5	3,4	6	3
30060-M5	M 5	0,8	50	13	19	6	4,9	8	3
30060-M6	M 6	1	56	15	27	6	4,9	8	3
30060-M8	M 8	1,25	63	19	40	6	4,9	8	3
30060-M10	M 10	1,5	70	22	47	7	5,5	8	3
30060-M12	M 12	1,75	75	25	48	9	7	10	4
30060-M16	M 16	2	80	25	38	12	9	12	4
30060-M20	M 20	2,5	95	32	50	16	12	15	4
30060-M24	M 24	3	110	34	63	18	14,5	17	4
30060-M30	M 30	3,5	125	40	60	22	18	21	4

Ordering code includes initial, intermediate and final cutter.
 ≤ M 2.5: Without reduced neck after the thread

C1

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


HSS-E hand-held tap set

mm

HGB Inox



- For long-chipping materials



	P	M	K	N	S	H	O
VAP	●	●					

DIN 352										
	Designation VAP	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	30063-M2	M 2	0,4	36	8	7	2,8	2,1	5	3
	30063-M2.5	M 2.5	0,45	40	9	7,9	2,8	2,1	5	3
	30063-M3	M 3	0,5	40	9	7,8	3,5	2,7	6	3
	30063-M4	M 4	0,7	45	11	9,3	4,5	3,4	6	3
	30063-M5	M 5	0,8	50	13	11	6	4,9	8	3
	30063-M6	M 6	1	56	15	12,5	6	4,9	8	3
	30063-M8	M 8	1,25	63	19	15,9	6	4,9	8	3
	30063-M10	M 10	1,5	70	22	18,3	7	5,5	8	4
	30063-M12	M 12	1,75	75	25	20,6	9	7	10	4
	30063-M16	M 16	2	80	25	20	12	9	12	4
	30063-M20	M 20	2,5	95	32	25,8	16	12	15	4
	30063-M24	M 24	3	110	34	26,5	18	14,5	17	4
	30063-M30	M 30	3,5	125	40	31,3	22	18	21	4

Ordering code includes initial, intermediate and final cutter.
 ≤ M 2.5: Without reduced neck after the thread

C1

●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions



HSS-E hand-held tap set

mm


HGB Ti



- For long-chipping materials



DIN 352

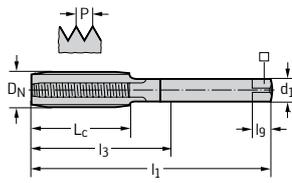

Designation NID	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
30016-M3	M 3	0,5	40	9	7,8	3,5	2,7	6	3
30016-M4	M 4	0,7	45	11	9,3	4,5	3,4	6	3
30016-M5	M 5	0,8	50	13	11	6	4,9	8	3
30016-M6	M 6	1	56	15	12,5	6	4,9	8	3
30016-M8	M 8	1,25	63	19	15,9	6	4,9	8	4
30016-M10	M 10	1,5	70	22	18,3	7	5,5	8	4
30016-M12	M 12	1,75	75	25	20,6	9	7	10	4

Ordering code includes initial, intermediate and final cutter.

C1

HSS-E taps, short

mm

KMB WST



- For long-chipping materials

M
DIN 13

ISO2/6H

$\leq 3 \times D_N$

$C=2-3$

S
 l_1

$\angle 40^\circ$

32HRC
1000
-200
N/mm²

	P	M	K	N	S	H	O
uncoated	●●		●	●			

DIN 2184-2	Designation unbeschichtet	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_2 mm	l_9 mm	N
	20167-M3	M 3	0,5	40	6	13,5	3,5	2,7	6	3
	20167-M4	M 4	0,7	45	7	16,5	4,5	3,4	6	3
	20167-M5	M 5	0,8	50	8	19	6	4,9	8	3
	20167-M6	M 6	1	56	10	27	6	4,9	8	3
	20167-M8	M 8	1,25	63	12	40	6	4,9	8	3
	20167-M10	M 10	1,5	70	15	47	7	5,5	8	3
	20167-M12	M 12	1,75	75	16	48	9	7	10	3

C1

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions



HSS-E taps, short

mm

KMB Ms



- For short-chipping materials

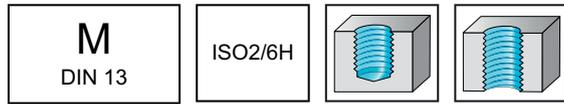

	P	M	K	N	S	H	O
uncoated				●●			●

DIN 2184-2										
Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N	
20165-M2	M 2	0,4	36	8	8	2,8	2,1	5	3	
20165-M2.5	M 2.5	0,45	40	9	9	2,8	2,1	5	3	
20165-M3	M 3	0,5	40	9	13,5	3,5	2,7	6	3	
20165-M3.5	M 3.5	0,6	45	10	15	4	3	6	3	
20165-M4	M 4	0,7	45	11	16,5	4,5	3,4	6	3	
20165-M5	M 5	0,8	50	13	19	6	4,9	8	3	
20165-M6	M 6	1	56	15	27	6	4,9	8	3	
20165-M8	M 8	1,25	63	19	40	6	4,9	8	3	

≤ M 2.5: Without reduced neck after the thread

C1

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E taps, short

mm

KMB H



- For long-chipping materials

M
DIN 13

ISO2/6H

$\leq 3 \times DN$

$B=3,5-5$

S

32HRC
1000
-200
N/mm²

	P	M	K	N	S	H	O
uncoated	●●		●●	●●			●

DIN 2184-2	Designation unbeschichtet	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	□	l_g mm	N
	20160-M3	M 3	0,5	40	9	13,5	3,5	2,7	6	3
	20160-M4	M 4	0,7	45	11	16,5	4,5	3,4	6	3
	20160-M5	M 5	0,8	50	13	19	6	4,9	8	3
	20160-M6	M 6	1	56	15	27	6	4,9	8	3
	20160-M8	M 8	1,25	63	19	40	6	4,9	8	3
	20160-M10	M 10	1,5	70	22	47	7	5,5	8	3
	20160-M12	M 12	1,75	75	25	48	9	7	10	3

C1

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = ☹️ machining conditions

HSS-E nut taps

mm

MMB




- For long-chipping materials

$\leq 1 \times D_N$

28HRC
900
-200
N/mm ²

M
DIN 13

ISO2/6H



uncoated

P	M	K	N	S	H	O
●●						

DIN 357		Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h12 mm	□	l _g mm	N
<p>Cylindrical shank</p>	20890-M2	M 2	0,4	66	16	47	1,4	1,1	4	3	
	20890-M2.5	M 2.5	0,45	70	20	51	1,7	1,3	4	3	
	20890-M3	M 3	0,5	70	22	51	2,2	1,8	4	3	
	20890-M4	M 4	0,7	90	25	70	2,8	2,1	5	3	
	20890-M5	M 5	0,8	100	28	79	3,5	2,7	6	3	
	20890-M6	M 6	1	110	32	89	4,5	3,4	6	3	
	20890-M8	M 8	1,25	125	40	102	6	4,9	8	3	
	20890-M10	M 10	1,5	140	45	117	7	5,5	8	3	
	20890-M12	M 12	1,75	180	50	153	9	7	10	3	
	20890-M16	M 16	2	200	63	158	12	9	12	3	

C1

WALTER SELECT

 ●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E automatic taps

mm


AMB



- For long-chipping materials

M
DIN 13

7G



$\leq 1 \times D_N$

18xP

28HRC
900
-200
N/mm²

TIN

P

M


K

N

S

H

O

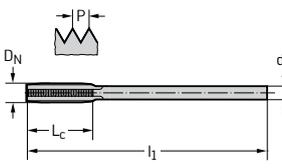AMB-NORM	Designation TIN	D _N	P mm	l ₁ mm	L _c mm	d ₁ h12 mm	N
	2084805-M5	M 5	0,8	271	19	3,9	5
	2084805-M6	M 6	1	271	24	4,6	5
	2084805-M8	M 8	1,25	271	30	6,1	5
	2084805-M10	M 10	1,5	271	36	8	5

Cylindrical shank

MAS 14, T-STAR 10

C1

**WALTER
SELECT**

●● Primary application

● Other application

Best tool for
→ Good = 😊
→ Average = 😐
→ Poor = 😞
machining conditions

HSS-E automatic taps

mm

AMB Inox



- For long-chipping materials

M
DIN 13

6HX

$\leq 1 \times D_N$

18xP

33HRC

1100-400 N/mm²

NID	P	M	K	N	S	H	O
		●●					

AMB-NORM	Designation NID	D_N	P mm	l_1 mm	L_c mm	d_1 h12 mm	N
	20844-M6	M 6	1	271	24	4,6	5
	20844-M8	M 8	1,25	271	30	6,1	5
	20844-M10	M 10	1,5	271	36	8	5
	20844-M12	M 12	1,75	271	42	9,4	5

Cylindrical shank

MAS 14, T-STAR 10

C1

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = ☹️ machining conditions

HSS-E stepped AMB

mm

Protostep Inox

- For long-chipping materials
- Three-stage

$\leq 1 \times D_N$

33HRC
1100
-400
N/mm²

M
DIN 13

6HX

	P	M	K	N	S	H	O
VAP		●●					

AMB-NORM	Designation VAP	d ₁ h12 mm	l ₁ mm	N	D _N	L _c mm	P mm
	20944-M5	3,9	271		M 5	19	0,8
	20944-M6	4,6	271		M 6	24	1
	20944-M8	6,1	271		M 8	30	1,25
	20944-M10	8	271		M 10	36	1,5
	20944-M12	9,4	271		M 12	42	1,75

Cylindrical shank

MAS 14, T-STAR 10

AMB-NORM	Designation VAP	d ₁ h12 mm	l ₁ mm	N	D _N	L _c mm	P mm
	20954-M14	11,1	435		M 14	48	2
	20954-M16	13,2	435		M 16	48	2

Cylindrical shank

MAS 20, T-STAR 20

C1

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


HSS-E PM machine taps

mm

Paradur® Eco Plus



– For long-chipping materials



	P	M	K	N	S	H	O
THL	●●	●●	●●	●●			
TIN	●●	●●	●●	●●			

~DIN 371

Designation THL	Designation TIN	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l ₉ mm	N
EP2051302-M2	EP2051305-M2	M 2	0,4	45	4	7,6	2,8	2,1	5	3
EP2051302-M2.5	EP2051305-M2.5	M 2.5	0,45	50	4	9,3	2,8	2,1	5	3
EP2051302-M3	EP2051305-M3	M 3	0,5	56	6	11	3,5	2,7	6	3
EP2051302-M4	EP2051305-M4	M 4	0,7	63	7	14,8	4,5	3,4	6	3
EP2051302-M5	EP2051305-M5	M 5	0,8	70	8	20,7	6	4,9	8	3
EP2051302-M6	EP2051305-M6	M 6	1	80	10	25	6	4,9	8	3
EP2051302-M8	EP2051305-M8	M 8	1,25	90	12	35	8	6,2	9	3
EP2051302-M10	EP2051305-M10	M 10	1,5	100	15	39	10	8	11	3

C1

DIN 376

Designation THL	Designation TIN	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l ₉ mm	N
EP2056302-M12	EP2056305-M12	M 12	1,75	110	16	83	9	7	10	4
EP2056302-M14	EP2056305-M14	M 14	2	110	20	81	11	9	12	4
EP2056302-M16	EP2056305-M16	M 16	2	110	20	68	12	9	12	4
EP2056302-M18	EP2056305-M18	M 18	2,5	125	25	81	14	11	14	4
EP2056302-M20	EP2056305-M20	M 20	2,5	140	25	95	16	12	15	4
EP2056302-M24	EP2056305-M24	M 24	3	160	30	113	18	14,5	17	4
EP2056302-M27		M 27	3	160	30	97	20	16	19	4
EP2056302-M30		M 30	3,5	180	35	115	22	18	21	4
EP2056302-M36		M 36	4	200	40	131	28	22	25	4
EP2056302-M42		M 42	4,5	200	45	102	32	24	27	5
EP2056302-M48		M 48	5	250	50	147	36	29	32	5
EP2056302-M56		M 56	5,5	250	55	120	40	32	35	5
EP2056302-M64		M 64	6	315	60	178	50	39	42	6

WALTER SELECT

●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E PM machine taps

mm

Paradur® Eco Plus



– For long-chipping materials



	P	M	K	N	S	H	O
THL	●●	●●	●●	●●			

~DIN 371		Designation THL	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	EP2051312-M4	M 4	0,7	63	7	14,8	4,5	3,4	6	3	
	EP2051312-M5	M 5	0,8	70	8	20,7	6	4,9	8	3	
	EP2051312-M6	M 6	1	80	10	25	6	4,9	8	3	
	EP2051312-M8	M 8	1,25	90	12	35	8	6,2	9	3	
	EP2051312-M10	M 10	1,5	100	15	39	10	8	11	3	

DIN 376		Designation THL	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	EP2056312-M12	M 12	1,75	110	16	83	9	7	10	4	
	EP2056312-M16	M 16	2	110	20	68	12	9	12	4	
	EP2056312-M20	M 20	2,5	140	25	95	16	12	15	4	
	EP2056312-M24	M 24	3	160	30	113	18	14,5	17	4	

WALTER SELECT

●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

C1


HSS-E PM machine taps

mm

Paradur® Eco Plus




- For long-chipping materials




	P	M	K	N	S	H	O
THL	●●	●●	●●	●●			

DIN 371

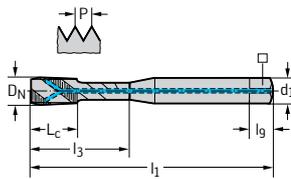

Designation THL	DN	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
EP2051342-M8	M 8	1,25	90	12	35	8	6,2	9	3
EP2051342-M10	M 10	1,5	100	15	39	10	8	11	3

DIN 376

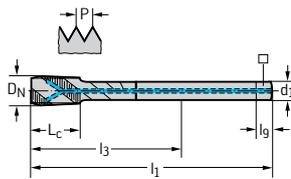

Designation THL	DN	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
EP2056342-M12	M 12	1,75	110	16	83	9	7	10	4
EP2056342-M16	M 16	2	110	20	68	12	9	12	4

C1

HSS-E PM machine taps

mm

Paradur® Eco Plus



– For long-chipping materials



	P	M	K	N	S	H	O
THL	●●	●●	●●	●●			

~DIN 371		Designation THL	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
		EP2051382-M3	M 3	0,5	56	6	11	3,5	2,7	6	3
		EP2051382-M4	M 4	0,7	63	7	14,8	4,5	3,4	6	3
		EP2051382-M5	M 5	0,8	70	8	20,7	6	4,9	8	3
		EP2051382-M6	M 6	1	80	10	25	6	4,9	8	3
		EP2051382-M8	M 8	1,25	90	12	35	8	6,2	9	3
		EP2051382-M10	M 10	1,5	100	15	39	10	8	11	3

DIN 376		Designation THL	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
		EP2056382-M12	M 12	1,75	110	16	83	9	7	10	4
		EP2056382-M14	M 14	2	110	20	81	11	9	12	4
		EP2056382-M16	M 16	2	110	20	68	12	9	12	4
		EP2056382-M18	M 18	2,5	125	25	81	14	11	14	4
		EP2056382-M20	M 20	2,5	140	25	95	16	12	15	4

C1

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


HSS-E PM machine taps

mm

Paradur® Eco CI




- For short-chipping materials
- Nitrided




	P	M	K	N	S	H	O
TICN			●●	●●			●●

DIN 371

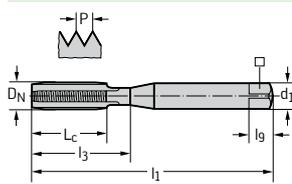

Designation TICN	DN	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
E2031466-M4	M 4	0,7	63	12	21	4,5	3,4	6	3
E2031466-M5	M 5	0,8	70	13	25	6	4,9	8	4
E2031466-M6	M 6	1	80	15	30	6	4,9	8	4
E2031466-M8	M 8	1,25	90	18	35	8	6,2	9	4
E2031466-M10	M 10	1,5	100	20	39	10	8	11	4

DIN 376

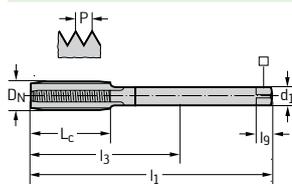

Designation TICN	DN	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
E2036466-M12	M 12	1,75	110	23	83	9	7	10	4
E2036466-M16	M 16	2	110	25	68	12	9	12	4
E2036466-M20	M 20	2,5	140	30	95	16	12	15	4
E2036466-M24	M 24	3	160	36	113	18	14,5	17	5

C1


HSS-E PM machine taps

mm

Paradur® Eco CI



- For short-chipping materials
- Nitrided



	P	M	K	N	S	H	O
TICN			●●	●●			●●

DIN 371		Designation TICN	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	E2031456-M4	M 4	0,7	63	12	21	4,5	3,4	6	3	
	E2031456-M5	M 5	0,8	70	13	25	6	4,9	8	4	
	E2031456-M6	M 6	1	80	15	30	6	4,9	8	4	
	E2031456-M8	M 8	1,25	90	18	35	8	6,2	9	4	
	E2031456-M10	M 10	1,5	100	20	39	10	8	11	4	

DIN 376		Designation TICN	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	E2036456-M12	M 12	1,75	110	23	83	9	7	10	4	
	E2036456-M16	M 16	2	110	25	68	12	9	12	4	
	E2036456-M20	M 20	2,5	140	30	95	16	12	15	4	

C1

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


HSS-E PM machine taps

mm

Paradur® Eco Plus



- For long-chipping materials



	P	M	K	N	S	H	O
THL	●●	●●	●●	●●			
TIN	●●	●●	●●	●●			

~DIN 371

Designation THL	Designation TIN	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l ₉ mm	N
EP2053302-M2	EP2053305-M2	M 2	0,4	45	4	7,6	2,8	2,1	5	3
EP2053302-M2.5	EP2053305-M2.5	M 2.5	0,45	50	4	9,3	2,8	2,1	5	3
EP2053302-M3	EP2053305-M3	M 3	0,5	56	6	11	3,5	2,7	6	3
EP2053302-M4	EP2053305-M4	M 4	0,7	63	7	14,8	4,5	3,4	6	3
EP2053302-M5	EP2053305-M5	M 5	0,8	70	8	20,7	6	4,9	8	3
EP2053302-M6	EP2053305-M6	M 6	1	80	10	25	6	4,9	8	3
EP2053302-M8	EP2053305-M8	M 8	1,25	90	12	35	8	6,2	9	3
EP2053302-M10	EP2053305-M10	M 10	1,5	100	15	39	10	8	11	3

≤ M 2.5: Without thread taper

DIN 376

Designation THL	Designation TIN	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l ₉ mm	N
EP2058302-M12	EP2058305-M12	M 12	1,75	110	16	83	9	7	10	4
EP2058302-M14	EP2058305-M14	M 14	2	110	20	81	11	9	12	4
EP2058302-M16	EP2058305-M16	M 16	2	110	20	68	12	9	12	4

C1

WALTER SELECT

●● Primary application ● Other application


Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E machine taps

TC115 Perform



- For long-chipping materials



	P	M	K	N	S	H	O
WY80AA	●●	●●	●●	●			
WY80FC	●●	●●	●●	●			

DIN 371	Designation WY80AA	Designation WY80FC	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC115-M1.6-C0-	TC115-M1.6-C0-	M 1.6	0,35	40	6	6	2,5	2,1	5	2
	TC115-M2-C0-	TC115-M2-C0-	M 2	0,4	45	4	9	2,8	2,1	5	3
	TC115-M2.5-C0-	TC115-M2.5-C0-	M 2.5	0,45	50	4	12,5	2,8	2,1	5	3
	TC115-M3-C0-	TC115-M3-C0-	M 3	0,5	56	6	18	3,5	2,7	6	3
	TC115-M4-C0-	TC115-M4-C0-	M 4	0,7	63	7	21	4,5	3,4	6	3
	TC115-M5-C0-	TC115-M5-C0-	M 5	0,8	70	8	25	6	4,9	8	3
	TC115-M6-C0-	TC115-M6-C0-	M 6	1	80	10	30	6	4,9	8	3
	TC115-M8-C0-	TC115-M8-C0-	M 8	1,25	90	12	35	8	6,2	9	3
	TC115-M10-C0-	TC115-M10-C0-	M 10	1,5	100	15	39	10	8	11	3

Ordering example for the grade WY80AA: TC115-M1.6-C0-WY80AA

DIN 376	Designation WY80AA	Designation WY80FC	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC115-M12-L0-	TC115-M12-L0-	M 12	1,75	110	16	83	9	7	10	3
	TC115-M14-L0-	TC115-M14-L0-	M 14	2	110	20	81	11	9	12	3
	TC115-M16-L0-	TC115-M16-L0-	M 16	2	110	20	68	12	9	12	3
	TC115-M20-L0-	TC115-M20-L0-	M 20	2,5	140	25	95	16	12	15	4

Ordering example for the grade WY80AA: TC115-M12-L0-WY80AA

C1


●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E machine taps

TC115 Perform mm



– For long-chipping materials



	P	M	K	N	S	H	O
WY80AA	●●	●●	●●	●			

DIN 371		Designation WY80AA	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_2 mm	l_9 mm	N
	TC115-M3-CE-	M 3		0,5	56	6	18	3,5	2,7	6	3
	TC115-M4-CE-	M 4		0,7	63	7	21	4,5	3,4	6	3
	TC115-M5-CE-	M 5		0,8	70	8	25	6	4,9	8	3
	TC115-M6-CE-	M 6		1	80	10	30	6	4,9	8	3
	TC115-M8-CE-	M 8		1,25	90	12	35	8	6,2	9	3
	TC115-M10-CE-	M 10		1,5	100	15	39	10	8	11	3

Ordering example for the grade WY80AA: TC115-M10-CE-WY80AA

DIN 376		Designation WY80AA	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_2 mm	l_9 mm	N
	TC115-M12-LE-	M 12		1,75	110	16	83	9	7	10	3
	TC115-M14-LE-	M 14		2	110	20	81	11	9	12	3
	TC115-M16-LE-	M 16		2	110	20	68	12	9	12	3
	TC115-M20-LE-	M 20		2,5	140	25	95	16	12	15	4


Ordering example for the grade WY80AA: TC115-M12-LE-WY80AA

HSS-E tap set 1

TC115 Perform



- Universal tap set



	P	M	K	N	S	H	O
WY80AA		●●	●●	●			
WY80FC	●●	●●	●●	●			

Tool			WY80AA	WY80FC
Designation	D _N	Quantity		
TC115-SET1-M3-M12-	M 3 – M 12	7	☒	☒

Bodies and assembly parts are included in the scope of delivery
 Ordering example for the grade WY80AA: TC115-SET1-M3-M12-WY80AA


C1

HSS-E tap set 2

TC115 Perform



- Universal tap set
- Incl. Core-hole drill



	P	M	K	N	S	H	O
WY80AA		●●	●●	●			
WY80FC		●●	●●	●			

Tool	Designation	D _N	Sets dia. mm	Sets dia. mm	Quantity	WY80AA	WY80FC
						●●	●●
	TC115-SET2-M3-M12-	M 3 – M 12	2,5	10,2	14	●●	●●

Bodies and assembly parts are included in the scope of delivery
 Ordering example for the grade WY80AA: TC115-SET2-M3-M12-WY80AA

C1

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E machine taps

mm

Paradur® Synchrospeed



- For long-chipping materials
- Only for synchronous machining (rigid tapping)

$\leq 2,5 \times D_N$

$C=2-3$

$\angle 40^\circ$

40HRC
1300 N/mm²

M
DIN 13

6HX

	P	M	K	N	S	H	O
THL	●●	●●	●●	●	●		●
TIN/VAP	●●	●●	●●	●	●		●

~DIN 371		Designation THL	Designation TIN/VAP	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h6 mm	l_g mm	N
	S2051302-M2	S2051305-M2	M 2	0,4	70	4	7,6	6	4,9	8	3
	S2051302-M2.5	S2051305-M2.5	M 2.5	0,45	70	4,5	9,3	6	4,9	8	3
	S2051302-M3	S2051305-M3	M 3	0,5	70	5	11	6	4,9	8	3
	S2051302-M4	S2051305-M4	M 4	0,7	70	7	14,8	6	4,9	8	3
	S2051302-M5	S2051305-M5	M 5	0,8	70	8,5	20,7	6	4,9	8	3
	S2051302-M6	S2051305-M6	M 6	1	80	10,5	25	6	4,9	8	3
	S2051302-M8	S2051305-M8	M 8	1,25	90	13,5	35	8	6,2	9	3
	S2051302-M10	S2051305-M10	M 10	1,5	100	16	39	10	8	11	3

~DIN 376		Designation THL	Designation TIN/VAP	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h6 mm	l_g mm	N
	S2056302-M12	S2056305-M12	M 12	1,75	110	18,5	42	12	9	12	3
	S2056302-M14	S2056305-M14	M 14	2	110	21	45	14	11	14	3
	S2056302-M16	S2056305-M16	M 16	2	110	21	55	16	12	15	4
	S2056302-M20	S2056305-M20	M 20	2,5	140	26,5	95	16	12	15	4
	S2056302-M24	S2056305-M24	M 24	3	160	32	97	20	16	19	4

C1

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


HSS-E machine taps

mm

Paradur® Synchronspeed



- For long-chipping materials
- Only for synchronous machining (rigid tapping)



	P	M	K	N	S	H	O
THL	●●	●●	●●	●	●		●
TIN/VAP	●●	●●	●●	●	●		●

~DIN 371

Designation THL	Designation TIN/VAP	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h6 mm	□	l ₉ mm	N
S2051312-M5	S2051315-M5	M 5	0,8	70	8,5	20,7	6	4,9	8	3
S2051312-M6	S2051315-M6	M 6	1	80	10,5	25	6	4,9	8	3
S2051312-M8	S2051315-M8	M 8	1,25	90	13,5	35	8	6,2	9	3
S2051312-M10	S2051315-M10	M 10	1,5	100	16	39	10	8	11	3

~DIN 376

Designation THL	Designation TIN/VAP	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h6 mm	□	l ₉ mm	N
S2056312-M12	S2056315-M12	M 12	1,75	110	18,5	68	12	9	12	3
S2056312-M14	S2056315-M14	M 14	2	110	21	66	14	11	14	3
S2056312-M16	S2056315-M16	M 16	2	110	21	65	16	12	15	4
S2056312-M20	S2056315-M20	M 20	2,5	140	26,5	95	16	12	15	4

C1

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E machine taps

mm

Paradur® H



– For long- and short-chipping materials

$\leq 1,5 \times D_N$

32HRC
 1000
 -200
 N/mm²

M
 DIN 13

ISO2/6H

	P	M	K	N	S	H	O
uncoated			●	●●			●
TIN			●	●●			●

DIN 371		Designation TIN	Designation unbeschichtet	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	N
			20311-M1	M 1	0,25	40	5	5	2,5	3
			20311-M1.2	M 1.2	0,25	40	5	5	2,5	3
			20311-M1.4	M 1.4	0,3	40	6,5	6,5	2,5	3
			20311-M1.6	M 1.6	0,35	40	7	7	2,5	3
			20311-M1.7	M 1.7	0,35	40	7	7	2,5	3
			20311-M1.8	M 1.8	0,35	40	7	7	2,5	3
			20311-M2	M 2	0,4	45	6	9	2,8	3
			20311-M2.3	M 2.3	0,4	45	7	12	2,8	3
			20311-M2.2	M 2.2	0,45	45	7	12	2,8	3
			20311-M2.5	M 2.5	0,45	50	8	12,5	2,8	3
		20311-M2.6	M 2.6	0,45	50	8	12,5	2,8	3	
		203115-M3	20311-M3	M 3	0,5	56	9	18	3,5	3
		203115-M3.5	20311-M3.5	M 3.5	0,6	56	11	20	4	3
		203115-M4	20311-M4	M 4	0,7	63	12	21	4,5	3
		203115-M5	20311-M5	M 5	0,8	70	13	25	6	3
		203115-M6	20311-M6	M 6	1	80	15	30	6	3
		203115-M7	20311-M7	M 7	1	80	15	30	7	3
		203115-M8	20311-M8	M 8	1,25	90	18	35	8	3
		203115-M10	20311-M10	M 10	1,5	100	20	39	10	3


\leq M 1.4: 5H
 \leq M 1.8: Without reduced neck after the thread

C1

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

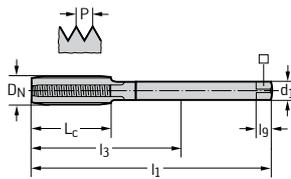DIN 376


Cylindrical shank

Designation unbeschichtet	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	N
20361-M2	M 2	0,4	45	6	26	1,4	3
20361-M2.5	M 2.5	0,45	50	8	31	1,8	3
20361-M3	M 3	0,5	56	9	37	2,2	3
20361-M4	M 4	0,7	63	12	43	2,8	3
20361-M5	M 5	0,8	70	13	49	3,5	3
20361-M6	M 6	1	80	15	59	4,5	3
20361-M8	M 8	1,25	90	18	67	6	3
20361-M10	M 10	1,5	100	20	77	7	3
20361-M12	M 12	1,75	110	23	83	9	3
20361-M14	M 14	2	110	25	81	11	3
20361-M16	M 16	2	110	25	68	12	3
20361-M18	M 18	2,5	125	30	81	14	4
20361-M20	M 20	2,5	140	30	95	16	4
20361-M24	M 24	3	160	36	113	18	4
20361-M27	M 27	3	160	36	97	20	4
20361-M30	M 30	3,5	180	42	115	22	4
20361-M33	M 33	3,5	180	42	113	25	4
20361-M36	M 36	4	200	48	131	28	4
20361-M42	M 42	4,5	200	54	102	32	4

HSS-E machine taps

mm

Paradur® H AZ



- For long- and short-chipping materials
- For thin-walled workpieces

$\leq 1,5 \times DN$

$C=2-3$

32HRC
 1000
 -200
 N/mm²

M
 DIN 13

ISO2/6H

uncoated	P	M	K	N	S	H	O
			●●	●●			●

DIN 371	Designation unbeschichtet	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	\square	l_g mm	N
	40311-M3	M 3	0,5	56	9	18	3,5	2,7	6	3
	40311-M4	M 4	0,7	63	12	21	4,5	3,4	6	3
	40311-M5	M 5	0,8	70	13	25	6	4,9	8	3
	40311-M6	M 6	1	80	15	30	6	4,9	8	3
	40311-M8	M 8	1,25	90	18	35	8	6,2	9	3

C1

WALTER SELECT

●● Primary application ● Other application


Best tool for → Good = 😊 → Average = 😐 → Poor = ☹️ machining conditions

HSS-E machine taps

TC130 Supreme




- WY80AA: High Performance
- WY80EH: Excellent Performance



	P	M	K	N	S	H	O
WY80AA	●●		●●	●			●
WY80EH	●●		●●	●			●


DIN 371

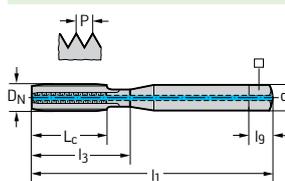

Designation WY80AA	Designation WY80EH	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_9 mm	N	
TC130-M4-C1-	TC130-M4-C1-	M 4	0,7	63	12	21	4,5	3,4	6	3
TC130-M5-C1-	TC130-M5-C1-	M 5	0,8	70	13	25	6	4,9	8	3
TC130-M6-C1-	TC130-M6-C1-	M 6	1	80	15	30	6	4,9	8	3
TC130-M8-C1-	TC130-M8-C1-	M 8	1,25	90	18	35	8	6,2	9	3
TC130-M10-C1-	TC130-M10-C1-	M 10	1,5	100	20	39	10	8	11	3

Ordering example for the grade WY80AA: TC130-M10-C1-WY80AA

DIN 376

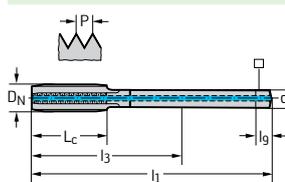

Designation WY80AA	Designation WY80EH	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_9 mm	N	
TC130-M12-L1-	TC130-M12-L1-	M 12	1,75	110	23	83	9	7	10	3
TC130-M14-L1-		M 14	2	110	25	81	11	9	12	3
TC130-M16-L1-	TC130-M16-L1-	M 16	2	110	25	68	12	9	12	3
TC130-M20-L1-	TC130-M20-L1-	M 20	2,5	140	30	95	16	12	15	3
TC130-M22-L1-		M 22	2,5	140	30	93	18	14,5	17	3
TC130-M24-L1-	TC130-M24-L1-	M 24	3	160	36	113	18	14,5	17	4
TC130-M27-L1-		M 27	3	160	36	97	20	16	19	4
TC130-M30-L1-	TC130-M30-L1-	M 30	3,5	180	42	115	22	18	21	4
TC130-M36-L1-	TC130-M36-L1-	M 36	4	200	48	131	28	22	25	5
TC130-M42-L1-		M 42	4,5	200	54	102	32	24	27	5


Ordering example for the grade WY80AA: TC130-M12-L1-WY80AA

HSS-E machine taps

TC130 Supreme



- WY80AA: High Performance
- WY80EH: Excellent Performance



	P	M	K	N	S	H	O
WY80AA	●●		●●	●			●
WY80EH	●●		●●	●			●

~DIN 376 L	Designation	Designation	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l ₉ mm	N
	WY80AA	WY80EH									
	TC130-M8-LG-	TC130-M8-LG-	M 8	1,25	110	18	87	6	4,9	8	3
	TC130-M10-LG-	TC130-M10-LG-	M 10	1,5	125	20	102	7	5,5	8	3
	TC130-M12-LG-	TC130-M12-LG-	M 12	1,75	140	23	113	9	7	10	3
	TC130-M14-LG-		M 14	2	140	25	111	11	9	12	3
	TC130-M16-LG-	TC130-M16-LG-	M 16	2	160	25	118	12	9	12	3
	TC130-M20-LG-	TC130-M20-LG-	M 20	2,5	180	30	135	16	12	15	3
	TC130-M22-LG-		M 22	2,5	200	30	153	18	14,5	17	3
	TC130-M24-LG-	TC130-M24-LG-	M 24	3	200	36	153	18	14,5	17	4
	TC130-M27-LG-		M 27	3	225	36	162	20	16	19	4
	TC130-M30-LG-	TC130-M30-LG-	M 30	3,5	250	42	185	22	18	21	4
	TC130-M33-LG-		M 33	3,5	275	42	208	25	20	23	4
	TC130-M36-LG-	TC130-M36-LG-	M 36	4	300	48	231	28	22	25	5
	TC130-M42-LG-		M 42	4,5	350	54	252	32	24	27	5

Ordering example for the grade WY80AA: TC130-M10-LG-WY80AA

C1


**WALTER
SELECT**

●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


HSS-E machine taps

mm

Paradur® N




– For long-chipping materials

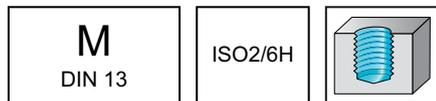

	P	M	K	N	S	H	O
uncoated	●●		●●	●●			
TiCN	●●		●●	●●			
TiN	●●		●●	●●			


DIN 371

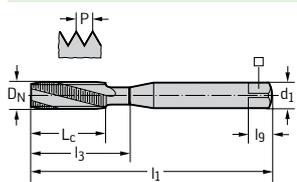

Designation TiCN	Designation TiN	Designation unbeschichtet	DN	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
		20410-M2	M 2	0,4	45	4	9	2,8	2,1	5	3
		20410-M2.5	M 2.5	0,45	50	4	12,5	2,8	2,1	5	3
	204105-M3	20410-M3	M 3	0,5	56	6	18	3,5	2,7	6	3
		20410-M3.5	M 3.5	0,6	56	6,5	20	4	3	6	3
2041006-M4	204105-M4	20410-M4	M 4	0,7	63	7	21	4,5	3,4	6	3
2041006-M5	204105-M5	20410-M5	M 5	0,8	70	8	25	6	4,9	8	3
2041006-M6	204105-M6	20410-M6	M 6	1	80	10	30	6	4,9	8	3
		20410-M7	M 7	1	80	10	30	7	5,5	8	3
2041006-M8	204105-M8	20410-M8	M 8	1,25	90	12	35	8	6,2	9	3
2041006-M10	204105-M10	20410-M10	M 10	1,5	100	15	39	10	8	11	3

l_g dimensions in accordance with DIN 10

DIN 376

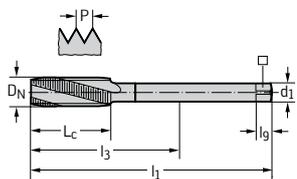

Designation TiCN	Designation TiN	Designation unbeschichtet	DN	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
		20460-M3	M 3	0,5	56	6	37	2,2	1,8	4	3
		20460-M4	M 4	0,7	63	7	43	2,8	2,1	5	3
		20460-M5	M 5	0,8	70	8	49	3,5	2,7	6	3
		20460-M6	M 6	1	80	10	59	4,5	3,4	6	3
		20460-M8	M 8	1,25	90	13	67	6	4,9	8	3
		20460-M10	M 10	1,5	100	15	77	7	5,5	8	3
2046006-M12	204605-M12	20460-M12	M 12	1,75	110	16	83	9	7	10	3
2046006-M14	204605-M14	20460-M14	M 14	2	110	20	81	11	9	12	3
2046006-M16	204605-M16	20460-M16	M 16	2	110	20	68	12	9	12	3
		20460-M18	M 18	2,5	125	25	81	14	11	14	4
2046006-M20	204605-M20	20460-M20	M 20	2,5	140	25	95	16	12	15	4
		20460-M22	M 22	2,5	140	25	93	18	14,5	17	4
		20460-M24	M 24	3	160	30	113	18	14,5	17	4
		20460-M30	M 30	3,5	180	35	115	22	18	21	4
		20460-M36	M 36	4	200	40	131	28	22	25	4

l_g dimensions in accordance with DIN 10


HSS-E machine taps

mm

Paradur® N



– For long-chipping materials



	P	M	K	N	S	H	O
uncoated	●●		●●	●●			

DIN 371		Designation unbeschichtet	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N
	20430-M2	M 2	0,4	45	4	9	2,8	2,1	5	3
	20430-M2.5	M 2.5	0,45	50	4	12,5	2,8	2,1	5	3
	20430-M3	M 3	0,5	56	6	18	3,5	2,7	6	3
	20430-M4	M 4	0,7	63	7	21	4,5	3,4	6	3
	20430-M5	M 5	0,8	70	8	25	6	4,9	8	3
	20430-M6	M 6	1	80	10	30	6	4,9	8	3
	20430-M8	M 8	1,25	90	12	35	8	6,2	9	3
	20430-M10	M 10	1,5	100	15	39	10	8	11	3

DIN 376		Designation unbeschichtet	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N
	20480-M12	M 12	1,75	110	16	83	9	7	10	3
	20480-M16	M 16	2	110	20	68	12	9	12	3

C1

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


HSS-E machine taps

mm

Paradur® NH



- For long-chipping materials



	P	M	K	N	S	H	O
uncoated	●●		●●	●			●
TIN	●●		●●	●			●

DIN 371	Designation TIN	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l ₉ mm	N
	2041215-M4		M 4	0,7	63	12	21	4,5	3,4	6	3
	2041215-M5	2041210-M5	M 5	0,8	70	13	25	6	4,9	8	3
	2041215-M6	2041210-M6	M 6	1	80	15	30	6	4,9	8	3
	2041215-M8	2041210-M8	M 8	1,25	90	18	35	8	6,2	9	3
	2041215-M10	2041210-M10	M 10	1,5	100	20	39	10	8	11	3

DIN 376	Designation TIN	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l ₉ mm	N
	2046215-M12	2046210-M12	M 12	1,75	110	23	83	9	7	10	4

C1

WALTER SELECT ●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions



HSS-E PM machine taps

mm

Paradur® H 24



– For long-chipping materials

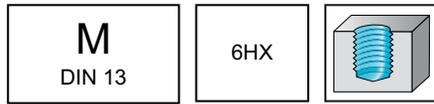

	P	M	K	N	S	H	O
uncoated	●		●				

~DIN 371		Designation unbeschichtet	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N
	204107-M3	M 3	0,5	56	11	11	3,5	2,7	6	3
	204107-M4	M 4	0,7	63	15	15	4,5	3,4	6	3
	204107-M5	M 5	0,8	70	18,5	18,5	6	4,9	8	3
	204107-M6	M 6	1	80	15	30	6	4,9	8	3
	204107-M8	M 8	1,25	90	18	38	8	6,2	9	3
	204107-M10	M 10	1,5	100	20	45	10	8	11	3

DIN 376		Designation unbeschichtet	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N
	204607-M12	M 12	1,75	110	23	83	9	7	10	4
	204607-M16	M 16	2	110	25	68	12	9	12	4

C1

WALTER SELECT ●● Primary application ● Other application


Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E-PM machine taps

TC120 Supreme




– For long-chipping materials



	P	M	K	N	S	H	O
WW60AG	●●			●			


DIN 371

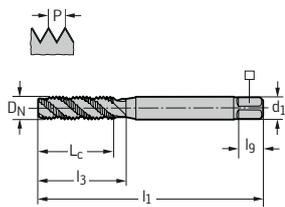

Designation WW60AG	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
TC120-M3-C0-	M 3	0,5	56	10	18	3,5	2,7	6	3
TC120-M4-C0-	M 4	0,7	63	13,5	21	4,5	3,4	6	3
TC120-M5-C0-	M 5	0,8	70	16,5	25	6	4,9	8	3
TC120-M6-C0-	M 6	1	80	20	30	6	4,9	8	3
TC120-M8-C0-	M 8	1,25	90	26,5	35	8	6,2	9	3
TC120-M10-C0-	M 10	1,5	100	33	39	10	8	11	3

Ordering example for the grade WW60AG: TC120-M10-C0-WW60AG

DIN 376

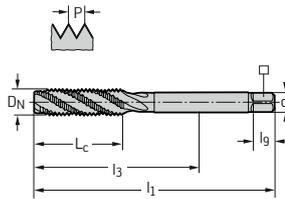

Designation WW60AG	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
TC120-M12-L0-	M 12	1,75	110	39,5	83	9	7	10	4
TC120-M16-L0-	M 16	2	120	52	78	12	9	12	4
TC120-M20-L0-	M 20	2,5	140	65	95	16	12	15	4
TC120-M24-L0-	M 24	3	160	78	113	18	14,5	17	4
TC120-M30-L0-	M 30	3,5	205	97	140	22	18	21	4

Ordering example for the grade WW60AG: TC120-M12-L0-WW60AG

HSS-E-PM machine taps

TC120 Supreme



– For long-chipping materials



	P	M	K	N	S	H	O
WW60AG	●●			●			

DIN 371	Designation WW60AG	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC120-M8-C1-	M 8	1,25	90	26,5	35	8	6,2	9	3
	TC120-M10-C1-	M 10	1,5	100	33	39	10	8	11	3

Ordering example for the grade WW60AG: TC120-M10-C1-WW60AG

DIN 376	Designation WW60AG	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC120-M12-L1-	M 12	1,75	110	39,5	83	9	7	10	4
	TC120-M16-L1-	M 16	2	120	52	78	12	9	12	4

Ordering example for the grade WW60AG: TC120-M12-L1-WW60AG




C1

HSS-E (-PM) machine taps

TC121 Supreme




- WW60RG = HSS-E-PM + TiAlN
- WY80BD = HSS-E + TiCN



	P	M	K	N	S	H	O
WW60RG	●●	●	●	●	●	●	●
WY80BD	●●	●	●	●	●	●	●


DIN 371

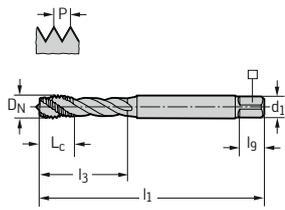

Designation WW60RG	Designation WY80BD	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N
TC121-M2-C0-		M 2	0,4	45	4	7,6	2,8	2,1	3
TC121-M3-C0-	TC121-M3-C0-	M 3	0,5	56	6	11	3,5	2,7	3
TC121-M4-C0-	TC121-M4-C0-	M 4	0,7	63	7	14,8	4,5	3,4	3
TC121-M5-C0-	TC121-M5-C0-	M 5	0,8	70	8	20,7	6	4,9	3
TC121-M6-C0-	TC121-M6-C0-	M 6	1	80	10	25	6	4,9	3
TC121-M8-C0-	TC121-M8-C0-	M 8	1,25	90	12	35	8	6,2	3
TC121-M10-C0-	TC121-M10-C0-	M 10	1,5	100	15	39	10	8	3

Ordering example for the grade WW60RG: TC121-M10-C0-WW60RG

DIN 376

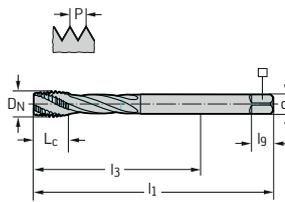

Designation WW60RG	Designation WY80BD	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N
TC121-M12-L0-	TC121-M12-L0-	M 12	1,75	110	16	83	9	7	4
TC121-M14-L0-	TC121-M14-L0-	M 14	2	110	20	81	11	9	4
TC121-M16-L0-	TC121-M16-L0-	M 16	2	110	20	68	12	9	4
TC121-M20-L0-	TC121-M20-L0-	M 20	2,5	140	25	95	16	15	4

Ordering example for the grade WW60RG: TC121-M12-L0-WW60RG

HSS-E (-PM) machine taps

TC121 Supreme



- For long-chipping materials



	P	M	K	N	S	H	O
WW60RG	●●	●	●	●			

DIN 371	Designation WW60RG	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC121-M5-C1-	M 5	0,8	70	8	20,7	6	4,9	8	3
	TC121-M6-C1-	M 6	1	80	10	25	6	4,9	8	3
	TC121-M8-C1-	M 8	1,25	90	12	35	8	6,2	9	3
	TC121-M10-C1-	M 10	1,5	100	15	39	10	8	11	3

Ordering example for the grade WW60RG: TC121-M10-C1-WW60RG

DIN 376	Designation WW60RG	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC121-M12-L1-	M 12	1,75	110	16	83	9	7	10	4
	TC121-M14-L1-	M 14	2	110	20	81	11	9	12	4
	TC121-M16-L1-	M 16	2	110	20	68	12	9	12	4
	TC121-M20-L1-	M 20	2,5	140	25	95	16	12	15	4


Ordering example for the grade WW60RG: TC121-M12-L1-WW60RG

HSS-E PM machine taps

TC122 Supreme




- For long-chipping materials



	P	M	K	N	S	H	O
WW60BC	●●		●				


DIN 371

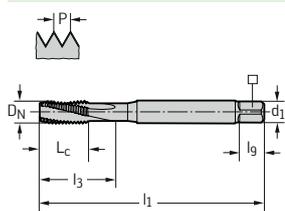

Designation WW60BC	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N
TC122-M3-C0-	M 3	0,5	56	10	10	3,5	2,7	3
TC122-M4-C0-	M 4	0,7	63	13	13	4,5	3,4	3
TC122-M5-C0-	M 5	0,8	70	16	16	6	4,9	3
TC122-M6-C0-	M 6	1	80	15	30	6	4,9	3
TC122-M8-C0-	M 8	1,25	90	18	35	8	6,2	3
TC122-M10-C0-	M 10	1,5	100	20	39	10	8	3

Ordering example for the grade WW60BC: TC122-M10-C0-WW60BC

DIN 376

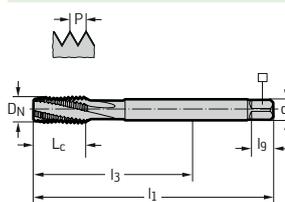

Designation WW60BC	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N
TC122-M12-L0-	M 12	1,75	110	23	83	9	7	4
TC122-M14-L0-	M 14	2	110	25	81	11	9	4
TC122-M16-L0-	M 16	2	110	25	68	12	9	4
TC122-M20-L0-	M 20	2,5	140	30	95	16	12	4

Ordering example for the grade WW60BC: TC122-M12-L0-WW60BC

HSS-E PM machine taps

TC122 Supreme



– For long-chipping materials



	P	M	K	N	S	H	O
WW60BC	●●		●				

DIN 371	Designation WW60BC	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC122-M5-C1-	M 5	0,8	70	16	16	6	4,9	8	3
	TC122-M6-C1-	M 6	1	80	15	30	6	4,9	8	3
	TC122-M8-C1-	M 8	1,25	90	18	35	8	6,2	9	3
	TC122-M10-C1-	M 10	1,5	100	20	39	10	8	11	3

Ordering example for the grade WW60BC: TC122-M10-C1-WW60BC

DIN 376	Designation WW60BC	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC122-M12-L1-	M 12	1,75	110	23	83	9	7	10	4
	TC122-M14-L1-	M 14	2	110	25	81	11	9	12	4
	TC122-M16-L1-	M 16	2	110	25	68	12	9	12	4
	TC122-M20-L1-	M 20	2,5	140	30	95	16	12	15	4

Ordering example for the grade WW60BC: TC122-M12-L1-WW60BC

C1

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


HSS-E machine taps

mm

Paradur® X-pert P



- For long-chipping materials



	P	M	K	N	S	H	O
uncoated	●●			●			●

DIN 371		Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	P20509-M2	M 2	M 2	0,4	45	4	9	2,8	2,1	5	3
	P20509-M2.5	M 2.5	M 2.5	0,45	50	4	12,5	2,8	2,1	5	3
	P20509-M3	M 3	M 3	0,5	56	6	18	3,5	2,7	6	3
	P20509-M4	M 4	M 4	0,7	63	7	21	4,5	3,4	6	3
	P20509-M5	M 5	M 5	0,8	70	8	25	6	4,9	8	3
	P20509-M6	M 6	M 6	1	80	10	30	6	4,9	8	3
	P20509-M7	M 7	M 7	1	80	10	30	7	5,5	8	3
	P20509-M8	M 8	M 8	1,25	90	12	35	8	6,2	9	3
	P20509-M10	M 10	M 10	1,5	100	15	39	10	8	11	3

C1

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


HSS-E machine taps

mm

Paradur® X-pert P




- For long-chipping materials




	P	M	K	N	S	H	O
uncoated	●●			●			●
TIN	●●			●			●

DIN 371

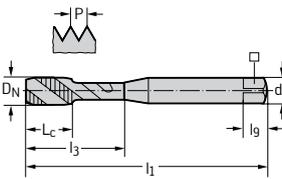

Designation TIN	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	P20519-M1.6	M 1.6	0,35	40	6	6	2,5	2,1	5	2
P2051905-M2	P20519-M2	M 2	0,4	45	4	9	2,8	2,1	5	3
	P20519-M2.2	M 2.2	0,45	45	4	12	2,8	2,1	5	3
P2051905-M2.5	P20519-M2.5	M 2.5	0,45	50	4	12,5	2,8	2,1	5	3
	P20519-M2.6	M 2.6	0,45	50	4	12,5	2,8	2,1	5	3
P2051905-M3	P20519-M3	M 3	0,5	56	6	18	3,5	2,7	6	3
P2051905-M3.5	P20519-M3.5	M 3.5	0,6	56	6,5	20	4	3	6	3
P2051905-M4	P20519-M4	M 4	0,7	63	7	21	4,5	3,4	6	3
	P20519-M4.5	M 4.5	0,75	70	8	25	6	4,9	8	3
P2051905-M5	P20519-M5	M 5	0,8	70	8	25	6	4,9	8	3
P2051905-M6	P20519-M6	M 6	1	80	10	30	6	4,9	8	3
	P20519-M7	M 7	1	80	10	30	7	5,5	8	3
P2051905-M8	P20519-M8	M 8	1,25	90	12	35	8	6,2	9	3
P2051905-M10	P20519-M10	M 10	1,5	100	15	39	10	8	11	3

C1

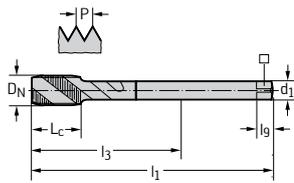DIN 376


Designation TIN	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	P20569-M4	M 4	0,7	63	7	43	2,8	2,1	5	3
	P20569-M5	M 5	0,8	70	8	49	3,5	2,7	6	3
	P20569-M6	M 6	1	80	10	59	4,5	3,4	6	3
	P20569-M8	M 8	1,25	90	12	67	6	4,9	8	3
	P20569-M9	M 9	1,25	90	13	67	7	5,5	8	3
	P20569-M10	M 10	1,5	100	15	77	7	5,5	8	3
	P20569-M11	M 11	1,5	100	15	76	8	6,2	9	3
P2056905-M12	P20569-M12	M 12	1,75	110	16	83	9	7	10	3
P2056905-M14	P20569-M14	M 14	2	110	20	81	11	9	12	3
P2056905-M16	P20569-M16	M 16	2	110	20	68	12	9	12	3
P2056905-M18	P20569-M18	M 18	2,5	125	25	81	14	11	14	4
P2056905-M20	P20569-M20	M 20	2,5	140	25	95	16	12	15	4
	P20569-M22	M 22	2,5	140	25	93	18	14,5	17	4
P2056905-M24	P20569-M24	M 24	3	160	30	113	18	14,5	17	4
	P20569-M27	M 27	3	160	30	97	20	16	19	4
P2056905-M30	P20569-M30	M 30	3,5	180	35	115	22	18	21	4
	P20569-M33	M 33	3,5	180	35	113	25	20	23	4
	P20569-M36	M 36	4	200	40	131	28	22	25	4
	P20569-M39	M 39	4	200	40	102	32	24	27	4
	P20569-M42	M 42	4,5	200	45	102	32	24	27	4
	P20569-M45	M 45	4,5	220	45	117	36	29	32	4
	P20569-M48	M 48	5	250	50	147	36	29	32	4
	P20569-M52	M 52	5	250	50	120	40	32	35	5
	P20569-M56	M 56	5,5	250	55	120	40	32	35	5
	P20569-M60	M 60	5,5	280	55	147	45	35	38	5
	P20569-M64	M 64	6	315	60	178	50	39	42	6

C1

HSS-E machine taps

mm

Paradur® X-pert P




– For long-chipping materials




	P	M	K	N	S	H	O
uncoated	●●			●			●

DIN 371

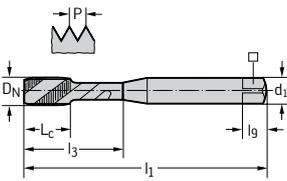

Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l ₉ mm	N
P205198-M3	M 3	0,5	56	6	18	3,5	2,7	6	3
P205198-M4	M 4	0,7	63	7	21	4,5	3,4	6	3
P205198-M5	M 5	0,8	70	8	25	6	4,9	8	3
P205198-M6	M 6	1	80	10	30	6	4,9	8	3
P205198-M8	M 8	1,25	90	12	35	8	6,2	9	3
P205198-M10	M 10	1,5	100	15	39	10	8	11	3

DIN 376

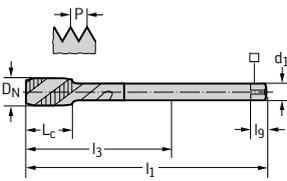

Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l ₉ mm	N
P205698-M12	M 12	1,75	110	16	83	9	7	10	3
P205698-M14	M 14	2	110	20	81	11	9	12	3
P205698-M16	M 16	2	110	20	68	12	9	12	3
P205698-M20	M 20	2,5	140	25	95	16	12	15	4
P205698-M24	M 24	3	160	30	113	18	14,5	17	4
P205698-M30	M 30	3,5	180	35	115	22	18	21	4

C1

**WALTER
SELECT**

●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions



HSS-E machine taps

mm

Paradur® X-pert P



- For long-chipping materials

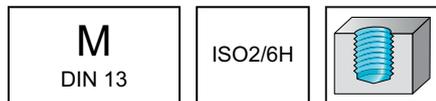

	P	M	K	N	S	H	O
uncoated	●●			●			●
THL	●●			●			●

~DIN 371 L

Designation THL	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l ₉ mm	N
P2051832-M3	P205183-M3	M 3	0,5	112	6	18	3,5	2,7	6	3
P2051832-M4	P205183-M4	M 4	0,7	112	7	21	4,5	3,4	6	3
P2051832-M5	P205183-M5	M 5	0,8	125	8	25	6	4,9	8	3
P2051832-M6	P205183-M6	M 6	1	125	10	30	6	4,9	8	3
P2051832-M8	P205183-M8	M 8	1,25	140	13	40	8	6,2	9	3
P2051832-M10	P205183-M10	M 10	1,5	160	15	50	10	8	11	3

~DIN 376 L

Designation THL	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l ₉ mm	N
P2056832-M8	P205683-M8	M 8	1,25	140	12	117	6	4,9	8	3
P2056832-M10	P205683-M10	M 10	1,5	160	15	137	7	5,5	8	3
P2056832-M12	P205683-M12	M 12	1,75	180	16	153	9	7	10	3
P2056832-M14	P205683-M14	M 14	2	180	20	151	11	9	12	3
P2056832-M16	P205683-M16	M 16	2	200	20	158	12	9	12	3
P2056832-M20	P205683-M20	M 20	2,5	224	25	179	16	12	15	4

C1

WALTER SELECT ●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


HSS-E machine taps

mm

Paradur® X-pert P



- For long-chipping materials



	P	M	K	N	S	H	O
uncoated	●●			●			●

~DIN 371 XL

Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
P2051935-M3	M 3	0,5	125	6	18	3,5	2,7	6	3
P2051935-M4	M 4	0,7	125	7	21	4,5	3,4	6	3
P2051935-M5	M 5	0,8	140	8	25	6	4,9	8	3
P2051935-M6	M 6	1	160	10	30	6	4,9	8	3
P2051935-M8	M 8	1,25	180	13	35	8	6,2	9	3
P2051935-M10	M 10	1,5	200	15	39	10	8	11	3

~DIN 376 XL

Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
P2056935-M8	M 8	1,25	180	12	157	6	4,9	8	3
P2056935-M10	M 10	1,5	200	15	177	7	5,5	8	3
P2056935-M12	M 12	1,75	220	16	193	9	7	10	3
P2056935-M14	M 14	2	220	20	191	11	9	12	3
P2056935-M16	M 16	2	220	20	178	12	9	12	3
P2056935-M18	M 18	2,5	250	25	206	14	11	14	4
P2056935-M20	M 20	2,5	280	25	235	16	12	15	4

WALTER SELECT

●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

C1


HSS-E machine taps

mm

Paradur® X-pert P AZ



- For long-chipping materials
- For thin-walled workpieces



	P	M	K	N	S	H	O
uncoated	●●			●			●

DIN 371		Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	P40519-M3	M 3	0,5	56	6	18	3,5	2,7	6	3	
	P40519-M4	M 4	0,7	63	7	21	4,5	3,4	6	3	
	P40519-M5	M 5	0,8	70	8	25	6	4,9	8	3	
	P40519-M6	M 6	1	80	10	30	6	4,9	8	3	
	P40519-M8	M 8	1,25	90	12	35	8	6,2	9	3	
	P40519-M10	M 10	1,5	100	15	39	10	8	11	3	

DIN 376		Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	P40569-M12	M 12	1,75	110	16	83	9	7	10	3	

C1

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


HSS-E machine taps

mm

Paradur® X-pert P




- For long-chipping materials




	P	M	K	N	S	H	O
uncoated	●●			●			●
TIN	●●			●			●

DIN 371

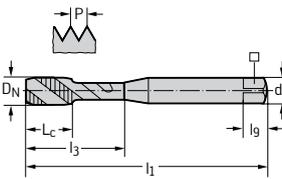

Designation TIN	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	P20539-M2	M 2	0,4	45	4	9	2,8	2,1	5	3
	P20539-M2.3	M 2.3	0,4	45	4	12	2,8	2,1	5	3
P2053905-M2.5	P20539-M2.5	M 2.5	0,45	50	4	12,5	2,8	2,1	5	3
P2053905-M3	P20539-M3	M 3	0,5	56	6	18	3,5	2,7	6	3
	P20539-M3.5	M 3.5	0,6	56	6,5	20	4	3	6	3
P2053905-M4	P20539-M4	M 4	0,7	63	7	21	4,5	3,4	6	3
P2053905-M5	P20539-M5	M 5	0,8	70	8	25	6	4,9	8	3
P2053905-M6	P20539-M6	M 6	1	80	10	30	6	4,9	8	3
P2053905-M8	P20539-M8	M 8	1,25	90	12	35	8	6,2	9	3
P2053905-M10	P20539-M10	M 10	1,5	100	15	39	10	8	11	3

DIN 376

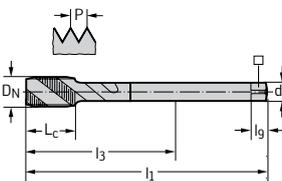

Designation TIN	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	P20589-M5	M 5	0,8	70	8	49	3,5	2,7	6	3
	P20589-M6	M 6	1	80	10	59	4,5	3,4	6	3
	P20589-M8	M 8	1,25	90	12	67	6	4,9	8	3
	P20589-M10	M 10	1,5	100	15	77	7	5,5	8	3
P2058905-M12	P20589-M12	M 12	1,75	110	16	83	9	7	10	3
	P20589-M14	M 14	2	110	20	81	11	9	12	3
P2058905-M16	P20589-M16	M 16	2	110	20	68	12	9	12	3

C1


HSS-E machine taps

mm

Paradur® X-pert P



- For long-chipping materials



	P	M	K	N	S	H	O
uncoated	●●			●			●
TIN	●●			●			●

DIN 371	Designation TIN	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l ₉ mm	N	
		P20549-M2	M 2	0,4	45	4	9	2,8	2,1	5	3	
		P20549-M2.5	M 2.5	0,45	50	4	12,5	2,8	2,1	5	3	
		P2054905-M3	P20549-M3	M 3	0,5	56	6	18	3,5	2,7	6	3
		P2054905-M4	P20549-M4	M 4	0,7	63	7	21	4,5	3,4	6	3
		P2054905-M5	P20549-M5	M 5	0,8	70	8	25	6	4,9	8	3
		P2054905-M6	P20549-M6	M 6	1	80	10	30	6	4,9	8	3
		P2054905-M8	P20549-M8	M 8	1,25	90	12	35	8	6,2	9	3
		P2054905-M10	P20549-M10	M 10	1,5	100	15	39	10	8	11	3

C1

DIN 376	Designation TIN	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l ₉ mm	N	
		P20599-M8	M 8	1,25	90	12	67	6	4,9	8	3	
		P20599-M10	M 10	1,5	100	15	77	7	5,5	8	3	
		P2059905-M12	P20599-M12	M 12	1,75	110	16	83	9	7	10	3
		P2059905-M16	P20599-M16	M 16	2	110	20	68	12	9	12	3
		P2059905-M20	P20599-M20	M 20	2,5	140	25	95	16	12	15	4
		P2059905-M24	P20599-M24	M 24	3	160	30	113	18	14,5	17	4

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


HSS-E machine taps

mm

Paradur® Short Chip HT




- For long-chipping materials



	P	M	K	N	S	H	O
THL	●●		●	●			
uncoated	●●		●	●			


DIN 371

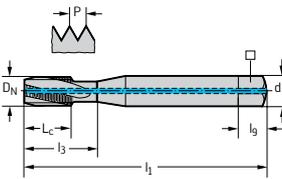

Designation THL	Designation unbeschichtet	DN	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l ₉ mm	N
20410T2-M5	20410TR-M5	M 5	0,8	70	8	25	6	4,9	8	3
20410T2-M6	20410TR-M6	M 6	1	80	10	30	6	4,9	8	3
20410T2-M8	20410TR-M8	M 8	1,25	90	12	35	8	6,2	9	3
20410T2-M10	20410TR-M10	M 10	1,5	100	15	39	10	8	11	3

20410TR: Uncoated rake

DIN 376

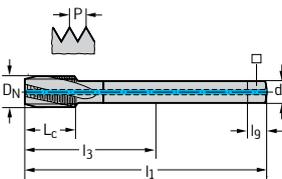

Designation THL	Designation unbeschichtet	DN	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l ₉ mm	N
20460T2-M12	20460TR-M12	M 12	1,75	110	16	83	9	7	10	3

20460TR: Uncoated rake


HSS-E machine taps

mm

Paradur® STE




- For long-chipping materials




M
DIN 13

6HX




	P	M	K	N	S	H	O
uncoated	●	●	●	●			
THL	●	●	●	●			

DIN 371

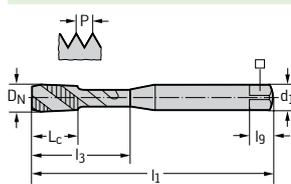

Designation THL	Designation unbeschichtet	DN	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
2051062-M3	205106-M3	M 3	0,5	56	6	18	3,5	2,7	6	3
2051062-M4	205106-M4	M 4	0,7	63	7	21	4,5	3,4	6	3
2051062-M5	205106-M5	M 5	0,8	70	8	25	6	4,9	8	3
2051062-M6	205106-M6	M 6	1	80	10	30	6	4,9	8	3
2051062-M8	205106-M8	M 8	1,25	90	12	35	8	6,2	9	4
2051062-M10	205106-M10	M 10	1,5	100	15	39	10	8	11	4

DIN 376

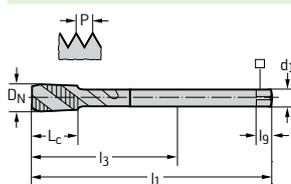

Designation THL	DN	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
2056062-M12	M 12	1,75	110	16	83	9	7	10	4
2056062-M16	M 16	2	110	20	68	12	9	12	5
2056062-M20	M 20	2,5	140	25	95	16	12	15	5
2056062-M24	M 24	3	160	30	113	18	14,5	17	5

C1

WALTER
SELECT

●● Primary application ● Other application
Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E (-PM) machine taps

TC142 Supreme



- WY80FC: Best chip control
- WW60RB: Best wear resistance

≤
3×DN

C=2-3

150°


36HRC
1200-350
N/mm²

M
DIN 13

6HX

	P	M	K	N	S	H	O
WY80FC	●	●●	●	●	●	●	●
WW60RB	●	●●	●	●	●	●	●


DIN 371

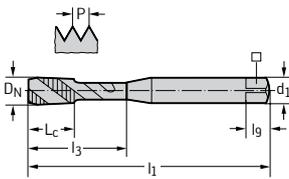

Designation WW60RB	Designation WY80FC	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l ₉ mm	N
	TC142-M1.6-C0-	M 1.6	0,35	40	6	6	2,5	2,1	5	2
TC142-M2-C0-	TC142-M2-C0-	M 2	0,4	45	4	9	2,8	2,1	5	3
	TC142-M2.3-C0-	M 2.3	0,4	45	4	12	2,8	2,1	5	3
	TC142-M2.5-C0-	M 2.5	0,45	50	4	12,5	2,8	2,1	5	3
	TC142-M2.6-C0-	M 2.6	0,45	50	4	12,5	2,8	2,1	5	3
TC142-M3-C0-	TC142-M3-C0-	M 3	0,5	56	6	18	3,5	2,7	6	3
TC142-M4-C0-	TC142-M4-C0-	M 4	0,7	63	7	21	4,5	3,4	6	3
TC142-M5-C0-	TC142-M5-C0-	M 5	0,8	70	8	25	6	4,9	8	3
TC142-M6-C0-	TC142-M6-C0-	M 6	1	80	10	30	6	4,9	8	3
TC142-M8-C0-	TC142-M8-C0-	M 8	1,25	90	12	35	8	6,2	9	3
TC142-M10-C0-	TC142-M10-C0-	M 10	1,5	100	15	39	10	8	11	3

Ordering example for the grade WY80FC: TC142-M1.6-C0-WY80FC

DIN 376

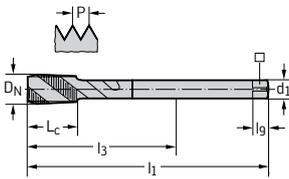

Designation WW60RB	Designation WY80FC	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l ₉ mm	N
	TC142-M6-L0-	M 6	1	80	10	59	4,5	3,4	6	3
	TC142-M8-L0-	M 8	1,25	90	12	67	6	4,9	8	3
TC142-M10-L0-	TC142-M10-L0-	M 10	1,5	100	15	77	7	5,5	8	3
TC142-M12-L0-	TC142-M12-L0-	M 12	1,75	110	16	83	9	7	10	3
TC142-M14-L0-	TC142-M14-L0-	M 14	2	110	20	81	11	9	12	3
TC142-M16-L0-	TC142-M16-L0-	M 16	2	110	20	68	12	9	12	4
TC142-M18-L0-		M 18	2,5	125	25	81	14	11	14	4
TC142-M20-L0-	TC142-M20-L0-	M 20	2,5	140	25	95	16	12	15	4
TC142-M24-L0-	TC142-M24-L0-	M 24	3	160	30	113	18	14,5	17	4
	TC142-M27-L0-	M 27	3	160	30	97	20	16	19	4
	TC142-M30-L0-	M 30	3,5	180	35	115	22	18	21	5
	TC142-M33-L0-	M 33	3,5	180	35	113	25	20	23	5
	TC142-M36-L0-	M 36	4	200	40	131	28	22	25	5

Ordering example for the grade WW60RB: TC142-M10-L0-WW60RB

WALTER SELECT


●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E machine taps

mm

Paradur® X-pert M




– For long-chipping materials



	P	M	K	N	S	H	O
VAP	●	●●					
TIN	●	●●					
TICN	●	●●					

DIN 371

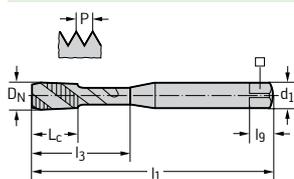


Designation TICN	Designation TIN	Designation VAP	DN	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	lg mm	N
		M20513-M1.6	M 1.6	0,35	40	6	6	2,5	2,1	5	3
		M20513-M1.7	M 1.7	0,35	40	6	6	2,5	2,1	5	3
		M20513-M1.8	M 1.8	0,35	40	6	6	2,5	2,1	5	3
M2051306-M2	M2051305-M2	M20513-M2	M 2	0,4	45	4	9	2,8	2,1	5	3
M2051306-M2.5	M2051305-M2.5	M20513-M2.5	M 2.5	0,45	50	4	12,5	2,8	2,1	5	3
M2051306-M3	M2051305-M3	M20513-M3	M 3	0,5	56	6	18	3,5	2,7	6	3
		M20513-M3.5	M 3.5	0,6	56	6,5	20	4	3	6	3
M2051306-M4	M2051305-M4	M20513-M4	M 4	0,7	63	7	21	4,5	3,4	6	3
		M20513-M4.5	M 4.5	0,75	70	8	25	6	4,9	8	3
M2051306-M5	M2051305-M5	M20513-M5	M 5	0,8	70	8	25	6	4,9	8	3
M2051306-M6	M2051305-M6	M20513-M6	M 6	1	80	10	30	6	4,9	8	3
		M20513-M7	M 7	1	80	10	30	7	5,5	8	3
M2051306-M8	M2051305-M8	M20513-M8	M 8	1,25	90	12	35	8	6,2	9	3
M2051306-M10	M2051305-M10	M20513-M10	M 10	1,5	100	15	39	10	8	11	3

≤ M 1.8: Without reduced neck after the thread

≤ M 2.5: Without thread taper

lg dimensions in accordance with DIN 10

DIN 376

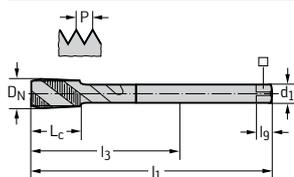

Designation TICN	Designation TIN	Designation VAP	DN	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	lg mm	N
M2056306-M6		M20563-M6	M 6	1	80	10	59	4,5	3,4	6	3
M2056306-M8		M20563-M8	M 8	1,25	90	12	67	6	4,9	8	3
M2056306-M10		M20563-M10	M 10	1,5	100	15	77	7	5,5	8	3
M2056306-M12	M2056305-M12	M20563-M12	M 12	1,75	110	16	83	9	7	10	4
		M20563-M14	M 14	2	110	20	81	11	9	12	4
M2056306-M16	M2056305-M16	M20563-M16	M 16	2	110	20	68	12	9	12	4
		M20563-M18	M 18	2,5	125	25	81	14	11	14	4
M2056306-M20	M2056305-M20	M20563-M20	M 20	2,5	140	25	95	16	12	15	4
		M20563-M22	M 22	2,5	140	25	93	18	14,5	17	4
M2056306-M24		M20563-M24	M 24	3	160	30	113	18	14,5	17	4
		M20563-M27	M 27	3	160	30	97	20	16	19	5
M2056306-M30		M20563-M30	M 30	3,5	180	35	115	22	18	21	5
		M20563-M33	M 33	3,5	180	35	113	25	20	23	5
		M20563-M36	M 36	4	200	40	131	28	22	25	5
		M20563-M42	M 42	4,5	200	45	102	32	24	27	5

lg dimensions in accordance with DIN 10

WALTER
SELECT

●● Primary application ● Other application
Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


HSS-E machine taps

mm

Paradur® X-pert M



– For long-chipping materials



	P	M	K	N	S	H	O
THL	●	●●					

~DIN 371 XL		Designation THL	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	M2051332-M4	M 4	0,7	125	7	21	4,5	3,4	6	3	
	M2051332-M5	M 5	0,8	140	8	25	6	4,9	8	3	
	M2051332-M6	M 6	1	160	10	30	6	4,9	8	3	

~DIN 376 XL		Designation THL	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	M2056332-M8	M 8	1,25	180	12	157	6	4,9	8	3	
	M2056332-M10	M 10	1,5	200	15	177	7	5,5	8	3	
	M2056332-M12	M 12	1,75	220	16	193	9	7	10	4	
	M2056332-M16	M 16	2	220	20	178	12	9	12	4	
	M2056332-M20	M 20	2,5	280	25	235	16	12	15	4	

WALTER SELECT

●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

C1


HSS-E machine taps

mm

Paradur® X-pert M



- For long-chipping materials



	P	M	K	N	S	H	O
VAP	●	●●					
TICN	●	●●					

DIN 371	Designation TICN	Designation VAP	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	□	l_9 mm	N
	M2053306-M3	M20533-M3	M 3	0,5	56	6	18	3,5	2,7	6	3
	M2053306-M4	M20533-M4	M 4	0,7	63	7	21	4,5	3,4	6	3
	M2053306-M5	M20533-M5	M 5	0,8	70	8	25	6	4,9	8	3
	M2053306-M6	M20533-M6	M 6	1	80	10	30	6	4,9	8	3
	M2053306-M8	M20533-M8	M 8	1,25	90	12	35	8	6,2	9	3
	M2053306-M10	M20533-M10	M 10	1,5	100	15	39	10	8	11	3

C1

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E machine taps

mm

Paradur Inox® 25



– For long-chipping materials

M
DIN 13

6HX

$\leq 1,5 \times D_N$

$E=1,5-2$

$\angle 25^\circ$

36HRC
1200
-350
N/mm²

	P	M	K	N	S	H	O
TIN	●●	●●	●●	●●	●●	●●	●●

~DIN 371	Designation TIN	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	2051315-M5	M 5	0,8	70	8	19	6	4,9	8	4
	2051315-M6	M 6	1	80	10	22	6	4,9	8	4
	2051315-M8	M 8	1,25	90	13	28	8	6,2	9	5
	2051315-M10	M 10	1,5	100	15	32	10	8	11	5

DIN 376	Designation TIN	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	2056315-M12	M 12	1,75	110	16	83	9	7	10	5
	2056315-M14	M 14	2	110	20	81	11	9	12	5
	2056315-M16	M 16	2	110	20	68	12	9	12	5
	2056315-M20	M 20	2,5	140	25	95	16	12	15	5

C1

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions



HSS-E PM machine taps

mm

Paradur® Eco CI



- For short-chipping materials
- Nitrided

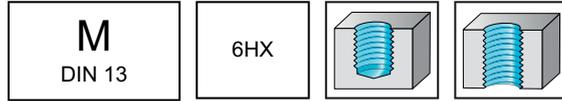

	P	M	K	N	S	H	O
NID			●●	●●			●●
TICN			●●	●●			●●

DIN 371	Designation NID	Designation TICN	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l ₉ mm	N
	E20314-M3	E2031406-M3	M 3	0,5	56	9	18	3,5	2,7	6	3
	E20314-M4	E2031406-M4	M 4	0,7	63	12	21	4,5	3,4	6	3
	E20314-M5	E2031406-M5	M 5	0,8	70	13	25	6	4,9	8	4
	E20314-M6	E2031406-M6	M 6	1	80	15	30	6	4,9	8	4
	E20314-M7	E2031406-M7	M 7	1	80	15	30	7	5,5	8	4
	E20314-M8	E2031406-M8	M 8	1,25	90	18	35	8	6,2	9	4
	E20314-M9	E2031406-M9	M 9	1,25	90	18	35	9	7	10	4
	E20314-M10	E2031406-M10	M 10	1,5	100	20	39	10	8	11	4

DIN 376	Designation NID	Designation TICN	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l ₉ mm	N
	E20364-M12	E2036406-M12	M 12	1,75	110	23	83	9	7	10	4
	E20364-M14	E2036406-M14	M 14	2	110	25	81	11	9	12	4
	E20364-M16	E2036406-M16	M 16	2	110	25	68	12	9	12	4
	E20364-M18	E2036406-M18	M 18	2,5	125	30	81	14	11	14	4
	E20364-M20	E2036406-M20	M 20	2,5	140	30	95	16	12	15	4
	E20364-M22	E2036406-M22	M 22	2,5	140	30	93	18	14,5	17	4
	E20364-M24	E2036406-M24	M 24	3	160	36	113	18	14,5	17	5
	E20364-M30	E2036406-M30	M 30	3,5	180	42	115	22	18	21	5

C1

WALTER SELECT

 ●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = ☹️ machining conditions


HSS-E PM machine taps

mm

Paradur® Eco CI



- For short-chipping materials
- Nitrided



	P	M	K	N	S	H	O
TICN			●●	●●			●●

DIN 371		Designation TICN	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	E2031416-M4	M 4	0,7	63	12	21	4,5	3,4	6	3	
	E2031416-M5	M 5	0,8	70	13	25	6	4,9	8	4	
	E2031416-M6	M 6	1	80	15	30	6	4,9	8	4	
	E2031416-M7	M 7	1	80	15	30	7	5,5	8	4	
	E2031416-M8	M 8	1,25	90	18	35	8	6,2	9	4	
	E2031416-M10	M 10	1,5	100	20	39	10	8	11	4	

DIN 376		Designation TICN	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	E2036416-M12	M 12	1,75	110	23	83	9	7	10	4	
	E2036416-M14	M 14	2	110	25	81	11	9	12	4	
	E2036416-M16	M 16	2	110	25	68	12	9	12	4	
	E2036416-M18	M 18	2,5	125	30	81	14	11	14	4	
	E2036416-M20	M 20	2,5	140	30	95	16	12	15	4	
	E2036416-M24	M 24	3	160	36	113	18	14,5	17	5	

C1

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E PM machine taps

mm

Paradur® Eco CI



- For short-chipping materials
- Nitrided



	P	M	K	N	S	H	O
TICN			●●	●●			●●

DIN 371	Designation TICN	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	E2031446-M6	M 6	1	80	15	30	6	4,9	8	4
	E2031446-M8	M 8	1,25	90	18	35	8	6,2	9	4
	E2031446-M10	M 10	1,5	100	20	39	10	8	11	4

DIN 376	Designation TICN	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	E2036446-M12	M 12	1,75	110	23	83	9	7	10	4
	E2036446-M16	M 16	2	110	25	68	12	9	12	4

C1

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E PM machine taps

mm

Paradur® Eco CI



- For short-chipping materials
- Nitrided

≤
3×DN

E=1,5-2

32HRC
1000
-100
N/mm²

M
DIN 13

6HX

TICN	P	M	K	N	S	H	O
			●●	●●			●●

DIN 371	Designation TICN	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	E2031466-M4	M 4	0,7	63	12	21	4,5	3,4	6	3
	E2031466-M5	M 5	0,8	70	13	25	6	4,9	8	4
	E2031466-M6	M 6	1	80	15	30	6	4,9	8	4
	E2031466-M8	M 8	1,25	90	18	35	8	6,2	9	4
	E2031466-M10	M 10	1,5	100	20	39	10	8	11	4

DIN 376	Designation TICN	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	E2036466-M12	M 12	1,75	110	23	83	9	7	10	4
	E2036466-M16	M 16	2	110	25	68	12	9	12	4
	E2036466-M20	M 20	2,5	140	30	95	16	12	15	4
	E2036466-M24	M 24	3	160	36	113	18	14,5	17	5

C1

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = ☹️ machining conditions


HSS-E PM machine taps

mm

Paradur® Eco CI




- For short-chipping materials
- Nitrided




	P	M	K	N	S	H	O
TICN			●●	●●			●●

DIN 371

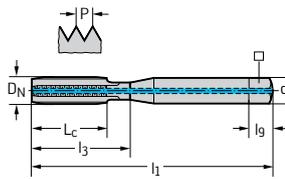

Designation TICN	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N	
E2031456-M4	M 4	0,7	63	12	21	4,5	3,4	6	3
E2031456-M5	M 5	0,8	70	13	25	6	4,9	8	4
E2031456-M6	M 6	1	80	15	30	6	4,9	8	4
E2031456-M8	M 8	1,25	90	18	35	8	6,2	9	4
E2031456-M10	M 10	1,5	100	20	39	10	8	11	4

DIN 376

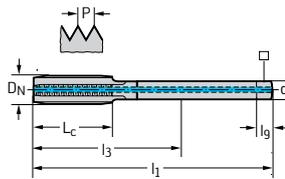

Designation TICN	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N	
E2036456-M12	M 12	1,75	110	23	83	9	7	10	4
E2036456-M16	M 16	2	110	25	68	12	9	12	4
E2036456-M20	M 20	2,5	140	30	95	16	12	15	4

C1

HSS-E PM machine taps

mm

Paradur® Eco CI



- For short-chipping materials
- Nitrided

≤
3×DN

C=2-3

XL

32HRC
1000
-100
N/mm²

M
DIN 13

6HX

TICN

P	M	K	N	S	H	O

~DIN 371 XL		Designation TICN	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
		E2031436-M4	M 4	0,7	125	12	21	4,5	3,4	6	3
		E2031436-M5	M 5	0,8	140	13	25	6	4,9	8	4
		E2031436-M6	M 6	1	160	15	30	6	4,9	8	4
		E2031436-M8	M 8	1,25	180	18	35	8	6,2	9	4
		E2031436-M10	M 10	1,5	200	20	39	10	8	11	4

~DIN 376 XL		Designation TICN	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
		E2036436-M12	M 12	1,75	220	23	193	9	7	10	4
		E2036436-M16	M 16	2	220	25	178	12	9	12	4
		E2036436-M20	M 20	2,5	280	30	235	16	12	15	4

C1

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions



HSS-E PM machine taps

mm

Paradur® X-pert K



- For short-chipping materials

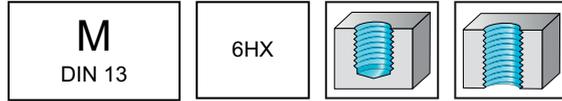

	P	M	K	N	S	H	O
TAFT			●●	●			

DIN 371		Designation TAFT	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	K2031407-M3	M 3	0,5	56	9	17	3,5	2,7	6	3	
	K2031407-M4	M 4	0,7	63	11	19	4,5	3,4	6	3	
	K2031407-M5	M 5	0,8	70	13	23	6	4,9	8	4	
	K2031407-M6	M 6	1	80	15	27	6	4,9	8	4	
	K2031407-M8	M 8	1,25	90	18	31	8	6,2	9	4	
	K2031407-M10	M 10	1,5	100	20	35	10	8	11	4	

DIN 376		Designation TAFT	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	K2036407-M12	M 12	1,75	110	23	78	9	7	10	4	
	K2036407-M14	M 14	2	110	25	75	11	9	12	4	
	K2036407-M16	M 16	2	110	25	62	12	9	12	4	
	K2036407-M20	M 20	2,5	140	30	88	16	12	15	4	

C1

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


HSS-E machine taps

mm

Paradur® X-pert N



– For long-chipping materials



	P	M	K	N	S	H	O
uncoated				●●	●		●

DIN 371	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	N20516-M1.6	M 1.6	0,35	40	6	6	2,5	2,1	5	2
	N20516-M2	M 2	0,4	45	4	9	2,8	2,1	5	2
	N20516-M2.3	M 2.3	0,4	45	4	12	2,8	2,1	5	2
	N20516-M2.5	M 2.5	0,45	50	4	12,5	2,8	2,1	5	2
	N20516-M3	M 3	0,5	56	6	18	3,5	2,7	6	2
	N20516-M3.5	M 3.5	0,6	56	6,5	20	4	3	6	2
	N20516-M4	M 4	0,7	63	7	21	4,5	3,4	6	2
	N20516-M5	M 5	0,8	70	8	25	6	4,9	8	2
	N20516-M6	M 6	1	80	10	30	6	4,9	8	2
	N20516-M8	M 8	1,25	90	12	35	8	6,2	9	2
N20516-M10	M 10	1,5	100	15	39	10	8	11	2	

DIN 376	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	N20566-M6	M 6	1	80	10	59	4,5	3,4	6	2
	N20566-M8	M 8	1,25	90	12	67	6	4,9	8	2
	N20566-M10	M 10	1,5	100	15	77	7	5,5	8	2
	N20566-M12	M 12	1,75	110	16	83	9	7	10	3
	N20566-M14	M 14	2	110	20	81	11	9	12	3
	N20566-M16	M 16	2	110	20	68	12	9	12	3
	N20566-M20	M 20	2,5	140	25	95	16	12	15	3

C1

●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


HSS-E machine taps

mm

Paradur® X-pert N



- Increased number of grooves
- For long-chipping materials



	P	M	K	N	S	H	O
uncoated				●●	●		●

DIN 371	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	N205166-M3	M 3	0,5	56	6	18	3,5	2,7	6	3
	N205166-M4	M 4	0,7	63	7	21	4,5	3,4	6	3
	N205166-M5	M 5	0,8	70	8	25	6	4,9	8	3
	N205166-M6	M 6	1	80	10	30	6	4,9	8	3
	N205166-M7	M 7	1	80	10	30	7	5,5	8	3
	N205166-M8	M 8	1,25	90	12	35	8	6,2	9	3
	N205166-M10	M 10	1,5	100	15	39	10	8	11	3

C1

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


HSS-E machine taps

mm

Paradur® X-pert N




– For long-chipping materials



	P	M	K	N	S	H	O
uncoated				●●	●		●

DIN 371

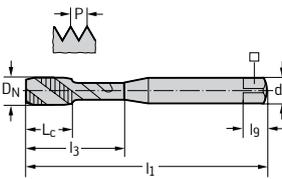

Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
N20536-M2	M 2	0,4	45	4	9	2,8	2,1	5	2
N20536-M2,5	M 2,5	0,45	50	4	12,5	2,8	2,1	5	2
N20536-M3	M 3	0,5	56	6	18	3,5	2,7	6	2
N20536-M4	M 4	0,7	63	7	21	4,5	3,4	6	2
N20536-M5	M 5	0,8	70	8	25	6	4,9	8	2
N20536-M6	M 6	1	80	10	30	6	4,9	8	2
N20536-M8	M 8	1,25	90	12	35	8	6,2	9	2

C1

**WALTER
SELECT**

●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


HSS-E machine taps

mm

Paradur® WLM Synchrospeed



- For long-chipping materials
- Only for synchronous machining (rigid tapping)



	P	M	K	N	S	H	O
uncoated	●	●	●	●	●	●	●
CRN	●	●	●	●	●	●	●

~DIN 371		Designation CRN	Designation unbeschichtet	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h6 mm	l_9 mm	N	
			S20516-M3	M 3	0,5	70	6	18	6	4,9	8	2
		S2051604-M4	S20516-M4	M 4	0,7	70	7	21	6	4,9	8	2
		S2051604-M5	S20516-M5	M 5	0,8	70	8	25	6	4,9	8	2
		S2051604-M6	S20516-M6	M 6	1	80	10	30	6	4,9	8	2
		S2051604-M8	S20516-M8	M 8	1,25	90	12	35	8	6,2	9	2
		S2051604-M10	S20516-M10	M 10	1,5	100	15	39	10	8	11	2

C1

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E machine taps

mm

Paradur® AP



- For short-chipping materials
- For Ampco

≤
2×DN

C=2-3

47HRC
1500
-700
N/mm²

M
DIN 13

6HX

	P	M	K	N	S	H	O
NIT				●●	●		

DIN 371	Designation NIT	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	20312-M3	M 3	0,5	56	9	18	3,5	2,7	6	3
	20312-M4	M 4	0,7	63	12	21	4,5	3,4	6	3
	20312-M5	M 5	0,8	70	13	25	6	4,9	8	3
	20312-M6	M 6	1	80	15	30	6	4,9	8	3
	20312-M8	M 8	1,25	90	18	35	8	6,2	9	3
	20312-M10	M 10	1,5	100	20	39	10	8	11	3

DIN 376	Designation NIT	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	20362-M12	M 12	1,75	110	23	83	9	7	10	4
	20362-M16	M 16	2	110	25	68	12	9	12	4
	20362-M20	M 20	2,5	140	30	95	16	12	15	4

C1

WALTER
SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = ☹️ machining conditions


HSS-E PM machine taps

mm

Paradur® Ni



- For long-chipping materials



	P	M	K	N	S	H	O
uncoated	●				●●		

~DIN 371	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	204104-M2	M 2	0,4	45	8	8	2,8	2,1	5	3
	204104-M3	M 3	0,5	56	10	10	3,5	2,7	6	3
	204104-M3.5	M 3.5	0,6	56	12	12	4	3	6	3
	204104-M4	M 4	0,7	63	13	13	4,5	3,4	6	3
	204104-M5	M 5	0,8	70	16	16	6	4,9	8	3
	204104-M6	M 6	1	80	15	23	6	4,9	8	3
	204104-M8	M 8	1,25	90	18	29,5	8	6,2	9	3
	204104-M10	M 10	1,5	100	20	33,5	10	8	11	4

C1

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


HSS-E PM machine taps

mm

Paradur® Ni



- For long-chipping materials



	P	M	K	N	S	H	O
uncoated	●	●	●	●	●	●	●
TiCN	●	●	●	●	●	●	●

~DIN 371		Designation TICN	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	20410206-M2	204102-M2	M 2	0,4	45	8	8	2,8	2,1	5	3	
	20410206-M2.5	204102-M2.5	M 2.5	0,45	50	9	30	2,8	2,1	5	3	
	20410206-M3	204102-M3	M 3	0,5	56	10	35	3,5	2,7	6	3	
	20410206-M4	204102-M4	M 4	0,7	63	13	42	4,5	3,4	6	3	
	20410206-M5	204102-M5	M 5	0,8	70	16	16	6	4,9	8	3	
	20410206-M6	204102-M6	M 6	1	80	15	23	6	4,9	8	3	
	20410206-M8	204102-M8	M 8	1,25	90	18	29,5	8	6,2	9	3	
	20410206-M10	204102-M10	M 10	1,5	100	20	33,5	10	8	11	4	

DIN 376		Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	204602-M12	M 12	1,75	110	23	83	9	7	10	4	
	204602-M14	M 14	2	110	25	81	11	9	12	4	
	204602-M16	M 16	2	110	25	68	12	9	12	4	
	204602-M18	M 18	2,5	125	30	81	14	11	14	5	
	204602-M20	M 20	2,5	140	30	95	16	12	15	5	

C1

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


HSS-E PM machine taps

mm

Paradur® Ni 10



- For long- and short-chipping materials



	P	M	K	N	S	H	O
uncoated	●●			●	●●		
TiN	●●			●	●●		

~DIN 371	Designation	Designation	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	□	l_9 mm	N
	TiN	unbeschichtet									
	2041015-M3	204101-M3	M 3	0,5	56	8	35	3,5	2,7	6	3
	2041015-M4	204101-M4	M 4	0,7	63	10,5	42	4,5	3,4	6	3
	2041015-M5	204101-M5	M 5	0,8	70	13	47	6	4,9	8	3
	2041015-M6	204101-M6	M 6	1	80	16	57	6	4,9	8	3
	2041015-M8	204101-M8	M 8	1,25	90	20,5	66	8	6,2	9	3
	2041015-M10	204101-M10	M 10	1,5	100	25,5	72	10	8	11	3
	2041015-M12	204101-M12	M 12	1,75	110	30,5	68	12	9	12	4
	2041015-M16	204101-M16	M 16	2	110	39,5	65	16	12	15	4

Without reduced neck after the thread

C1

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E PM machine taps

mm

Paradur® Ti



- Recommended with oil
- For long-chipping materials

≤
2×DN

C=2-3

15°

44HRC
1400
-700
N/mm²

M
DIN 13

6HX

	P	M	K	N	S	H	O
uncoated	●●			●	●●		
TiCN	●●			●	●●		

~DIN 371		Designation TiCN	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
			20416-M1	M 1	0,25	40	5	5	2,5	2,1	5	3
			20416-M1.2	M 1.2	0,25	40	5	5	2,5	2,1	5	3
			20416-M1.4	M 1.4	0,3	40	5	5	2,5	2,1	5	3
			20416-M1.6	M 1.6	0,35	40	5	5	2,5	2,1	5	3
			20416-M1.8	M 1.8	0,35	40	5	5	2,5	2,1	5	3
	2041606-M2		20416-M2	M 2	0,4	45	8	8	2,8	2,1	5	3
			20416-M2.2	M 2.2	0,45	45	8	8	2,8	2,1	5	3
	2041606-M2.5		20416-M2.5	M 2.5	0,45	50	9	9	2,8	2,1	5	3
	2041606-M3		20416-M3	M 3	0,5	56	10	10	3,5	2,7	6	3
			20416-M3.5	M 3.5	0,6	56	12	12	4	3	6	3
2041606-M4		20416-M4	M 4	0,7	63	13	13	4,5	3,4	6	3	
		20416-M4.5	M 4.5	0,75	70	16	16	6	4,9	8	3	
2041606-M5		20416-M5	M 5	0,8	70	16	16	6	4,9	8	3	
2041606-M6		20416-M6	M 6	1	80	15	23	6	4,9	8	3	
2041606-M8		20416-M8	M 8	1,25	90	18	29,5	8	6,2	9	3	
2041606-M10		20416-M10	M 10	1,5	100	20	33,5	10	8	11	3	

≤ M 1.4: 5HX

DIN 376		Designation TiCN	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
		2046606-M12	20466-M12	M 12	1,75	110	23	83	9	7	10	4
			20466-M14	M 14	2	110	25	81	11	9	12	4
	2046606-M16		20466-M16	M 16	2	110	25	68	12	9	12	4
			20466-M20	M 20	2,5	140	30	95	16	12	15	4
			20466-M24	M 24	3	160	36	113	18	14,5	17	5
			20466-M30	M 30	3,5	180	42	115	22	18	21	5
			20466-M36	M 36	4	200	48	131	28	22	25	5


HSS-E PM machine taps

mm

Paradur® Ti Plus



- Recommended with emulsion
- For long-chipping materials



	P	M	K	N	S	H	O
ACN					●●		

~DIN 371	Designation	D_N	P	l_1	L_c	l_3	d_1	h_9	l_g	N
	ACN		mm	mm	mm	mm	mm	mm	mm	
	2041663-M2	M 2	0,4	45	8	8	2,8	2,1	5	3
	2041663-M2.5	M 2.5	0,45	50	9	30	2,8	2,1	5	3
	2041663-M3	M 3	0,5	56	10	10	3,5	2,7	6	3
	2041663-M3.5	M 3.5	0,6	56	12	12	4	3	6	3
	2041663-M4	M 4	0,7	63	13	13	4,5	3,4	6	3
	2041663-M5	M 5	0,8	70	16	16	6	4,9	8	3
	2041663-M6	M 6	1	80	15	23	6	4,9	8	3
	2041663-M8	M 8	1,25	90	18	29,5	8	6,2	9	3
	2041663-M10	M 10	1,5	100	20	33,5	10	8	11	3

DIN 376	Designation	D_N	P	l_1	L_c	l_3	d_1	h_9	l_g	N
	ACN		mm	mm	mm	mm	mm	mm	mm	
	2046663-M12	M 12	1,75	110	23	83	9	7	10	4
	2046663-M16	M 16	2	110	25	68	12	9	12	4
	2046663-M20	M 20	2,5	140	30	95	16	12	15	4

C1

WALTER SELECT

 ●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E PM machine taps

mm

Paradur® FT



- For short-chipping materials

$\leq 2 \times D_N$

$D=3,5-5$

51HRC
 1700
 -900
 N/mm²

M
 DIN 13

ISO2/6H

uncoated	P	M	K	N	S	H	O
----------	---	---	---	---	---	---	---


~DIN 371	Designation unbeschichtet	D_N	P mm	l_1 mm	L_c mm	d_1 h9 mm	□	l_g mm	N
	20316-M3	M 3	0,5	56	11	3,5	2,7	6	3
	20316-M4	M 4	0,7	63	13	4,5	3,4	6	5
	20316-M5	M 5	0,8	70	16	6	4,9	8	5
	20316-M6	M 6	1	80	20	6	4,9	8	5
	20316-M8	M 8	1,25	90	25	8	6,2	9	5
	20316-M10	M 10	1,5	100	30	10	8	11	5

Without reduced neck after the thread


HSS-E machine taps

mm

Paradur® Uni




- For long-chipping materials

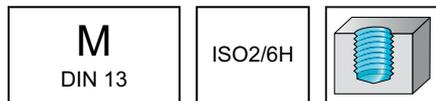

	P	M	K	N	S	H	O
uncoated	●●		●	●			
VAP	●●		●	●			
TIN	●●		●	●			


DIN 371

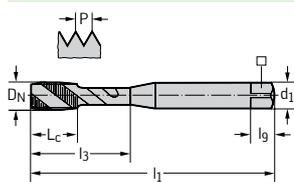

Designation TIN	Designation VAP	Designation unbeschichtet	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_9 mm	N	
		7051770-M2	M 2	0,4	45	4	9	2,8	2,1	5	3
		7051770-M2.5	M 2.5	0,45	50	4	12,5	2,8	2,1	5	3
		7051770-M2.6	M 2.6	0,45	50	4	12,5	2,8	2,1	5	3
7051775-M3	7051773-M3	7051770-M3	M 3	0,5	56	6	18	3,5	2,7	6	3
		7051770-M3.5	M 3.5	0,6	56	6,5	20	4	3	6	3
7051775-M4	7051773-M4	7051770-M4	M 4	0,7	63	7	21	4,5	3,4	6	3
7051775-M5	7051773-M5	7051770-M5	M 5	0,8	70	8	25	6	4,9	8	3
7051775-M6	7051773-M6	7051770-M6	M 6	1	80	10	30	6	4,9	8	3
7051775-M7		7051770-M7	M 7	1	80	10	30	7	5,5	8	3
7051775-M8	7051773-M8	7051770-M8	M 8	1,25	90	12	35	8	6,2	9	3
7051775-M10	7051773-M10	7051770-M10	M 10	1,5	100	15	39	10	8	11	3

l_9 dimensions in accordance with DIN 10

DIN 376

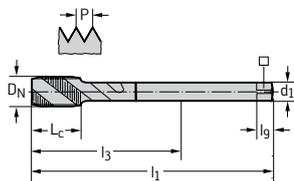

Designation TIN	Designation VAP	Designation unbeschichtet	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_9 mm	N	
		7056770-M3	M 3	0,5	56	6	34	2,2	1,8	4	3
		7056770-M4	M 4	0,7	63	7	43	2,8	2,1	5	3
		7056770-M5	M 5	0,8	70	8	49	3,5	2,7	6	3
		7056770-M6	M 6	1	80	10	59	4,5	3,4	6	3
		7056770-M8	M 8	1,25	90	12	67	6	4,9	8	3
		7056770-M10	M 10	1,5	100	15	77	7	5,5	8	3
7056775-M12	7056773-M12	7056770-M12	M 12	1,75	110	16	83	9	7	10	3
7056775-M14	7056773-M14	7056770-M14	M 14	2	110	20	81	11	9	12	3
7056775-M16	7056773-M16	7056770-M16	M 16	2	110	20	68	12	9	12	4
7056775-M18		7056770-M18	M 18	2,5	125	25	81	14	11	14	4
7056775-M20		7056770-M20	M 20	2,5	140	25	95	16	12	15	4
		7056770-M22	M 22	2,5	140	25	93	18	14,5	17	4
		7056770-M24	M 24	3	160	30	113	18	14,5	17	4
		7056770-M27	M 27	3	160	30	97	20	16	19	4
		7056770-M30	M 30	3,5	180	35	115	22	18	21	4
		7056770-M33	M 33	3,5	180	35	113	25	20	23	4
		7056770-M36	M 36	4	200	40	131	28	22	25	4

l_9 dimensions in accordance with DIN 10


HSS-E machine taps

mm

Paradur® Uni



– For long-chipping materials



	P	M	K	N	S	H	O
uncoated	●●		●	●			

DIN 371	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	7053770-M2	M 2	0,4	45	4	9	2,8	2,1	5	3
	7053770-M3	M 3	0,5	56	6	18	3,5	2,7	6	3
	7053770-M4	M 4	0,7	63	7	21	4,5	3,4	6	3
	7053770-M5	M 5	0,8	70	8	25	6	4,9	8	3
	7053770-M6	M 6	1	80	10	30	6	4,9	8	3
	7053770-M8	M 8	1,25	90	12	35	8	6,2	9	3
	7053770-M10	M 10	1,5	100	15	39	10	8	11	3

DIN 376	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	7058770-M12	M 12	1,75	110	16	83	9	7	10	3
	7058770-M14	M 14	2	110	20	81	11	9	12	3
	7058770-M16	M 16	2	110	20	68	12	9	12	4
	7058770-M20	M 20	2,5	140	25	95	16	12	15	4

C1

●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


HSS-E PM machine taps

mm

Prototex® Eco Plus



– For long-chipping materials



DIN 374	Designation THL	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	EP2126302-M6X0.75	MF 6x0.75	0,75	80	15	59	4,5	3,4	6	3
	EP2126302-M8X1	MF 8x1	1	90	18	67	6	4,9	8	3
	EP2126302-M10X1	MF 10x1	1	90	20	67	7	5,5	8	3
	EP2126302-M10X1.25	MF 10x1.25	1,25	100	20	77	7	5,5	8	3
	EP2126302-M12X1	MF 12x1	1	100	21	73	9	7	10	4
	EP2126302-M12X1.25	MF 12x1.25	1,25	100	21	73	9	7	10	4
	EP2126302-M12X1.5	MF 12x1.5	1,5	100	21	73	9	7	10	4
	EP2126302-M14X1.5	MF 14x1.5	1,5	100	21	71	11	9	12	4
	EP2126302-M16X1.5	MF 16x1.5	1,5	100	21	58	12	9	12	4
	EP2126302-M18X1.5	MF 18x1.5	1,5	110	24	66	14	11	14	4
	EP2126302-M20X1.5	MF 20x1.5	1,5	125	24	80	16	12	15	4
	EP2126302-M22X1.5	MF 22x1.5	1,5	125	24	78	18	14,5	17	4

C1

HSS-E PM machine taps

mm

Prototex® Eco Plus



– For long-chipping materials



	P	M	K	N	S	H	O
THL	●●	●●	●●	●●			

DIN 374	Designation THL	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N
	EP2126342-M8X1	MF 8x1	1	90	18	67	6	4,9	3
	EP2126342-M10X1	MF 10x1	1	90	20	67	7	5,5	3
	EP2126342-M10X1.25	MF 10x1.25	1,25	100	20	77	7	5,5	3
	EP2126342-M12X1	MF 12x1	1	100	21	73	9	7	4
	EP2126342-M12X1.25	MF 12x1.25	1,25	100	21	73	9	7	4
	EP2126342-M12X1.5	MF 12x1.5	1,5	100	21	73	9	7	4
	EP2126342-M14X1.5	MF 14x1.5	1,5	100	21	71	11	9	4
	EP2126342-M16X1.5	MF 16x1.5	1,5	100	21	58	12	9	4
	EP2126342-M18X1.5	MF 18x1.5	1,5	110	24	66	14	11	4
	EP2126342-M20X1.5	MF 20x1.5	1,5	125	24	80	16	12	4



C1

HSS-E machine taps

TC216 Perform




– For long-chipping materials



	P	M	K	N	S	H	O
WY80AA	●	●	●	●			
WY80FC	●	●	●	●			

DIN 374

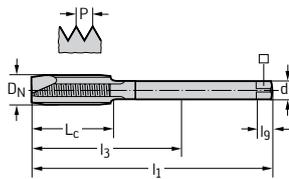

Designation WY80AA	Designation WY80FC	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_9 mm	N
TC216-M8X1-L0-	TC216-M8X1-L0-	MF 8x1	1	90	18	67	6	4,9	3
TC216-M10X1-L0-	TC216-M10X1-L0-	MF 10x1	1	90	20	67	7	5,5	3
TC216-M10X1.25-L0-	TC216-M10X1.25-L0-	MF 10x1.25	1,25	100	20	77	7	5,5	3
TC216-M12X1.25-L0-	TC216-M12X1.25-L0-	MF 12x1.25	1,25	100	21	73	9	7	4
TC216-M12X1.5-L0-	TC216-M12X1.5-L0-	MF 12x1.5	1,5	100	21	73	9	7	4
TC216-M14X1.5-L0-	TC216-M14X1.5-L0-	MF 14x1.5	1,5	100	21	71	11	9	4
TC216-M16X1.5-L0-	TC216-M16X1.5-L0-	MF 16x1.5	1,5	100	21	58	12	9	4
TC216-M18X1.5-L0-	TC216-M18X1.5-L0-	MF 18x1.5	1,5	110	24	66	14	11	4

Ordering example for the grade WY80AA: TC216-M10X1-L0-WY80AA

HSS-E machine taps

mm

Prototex® Synchronspeed



- For long-chipping materials
- Only for synchronous machining (rigid tapping)


$\leq 3 \times D_N$

$B=3,5-5$

44HRC
1400
N/mm²

MF
DIN 13

6HX



	P	M	K	N	S	H	O
THL	●●	●●	●●	●●	●●		●●
TIN	●●	●●	●●	●●	●●		●●

~DIN 371	Designation	Designation	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h6 mm	□	l_9 mm	N
	THL	TIN									
	S2126302-M8X1	S2126305-M8X1	MF 8x1	1	90	10	35	8	6,2	9	3
	S2126302-M10X1.25	S2126305-M10X1.25	MF 10x1.25	1,25	100	13	39	10	8	11	3
	S2126302-M12X1.25	S2126305-M12X1.25	MF 12x1.25	1,25	100	13	42	12	9	12	3
	S2126302-M12X1.5	S2126305-M12X1.5	MF 12x1.5	1,5	100	15	42	12	9	12	3
	S2126302-M14X1.5	S2126305-M14X1.5	MF 14x1.5	1,5	100	15	49	14	11	14	3
	S2126302-M16X1.5	S2126305-M16X1.5	MF 16x1.5	1,5	100	15	50	16	12	15	4

C1



HSS-E machine taps

mm

Prototex® X-pert P




- For long-chipping materials

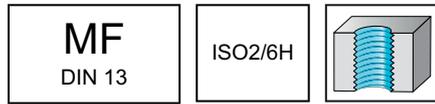

	P	M	K	N	S	H	O
uncoated	●	●	●	●	●	●	●
TIN	●	●	●	●	●	●	●


DIN 374

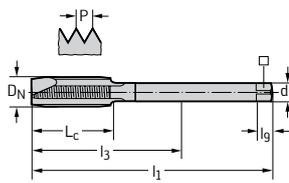

Designation TIN	Designation unbeschichtet	DN	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l ₉ mm	N
	P21360-M4X0.5	MF 4x0.5	0,5	63	12	43	2,8	2,1	5	3
P2136005-M5X0.5	P21360-M5X0.5	MF 5x0.5	0,5	70	13	49	3,5	2,7	6	3
P2136005-M6X0.5	P21360-M6X0.5	MF 6x0.5	0,5	80	15	59	4,5	3,4	6	3
P2136005-M6X0.75	P21360-M6X0.75	MF 6x0.75	0,75	80	15	59	4,5	3,4	6	3
P2136005-M8X0.5	P21360-M8X0.5	MF 8x0.5	0,5	80	15	57	6	4,9	8	3
P2136005-M8X0.75	P21360-M8X0.75	MF 8x0.75	0,75	80	15	57	6	4,9	8	3
P2136005-M8X1	P21360-M8X1	MF 8x1	1	90	18	67	6	4,9	8	3
	P21360-M10X0.5	MF 10x0.5	0,5	90	20	67	7	5,5	8	3
	P21360-M10X0.75	MF 10x0.75	0,75	90	20	67	7	5,5	8	3
P2136005-M10X1	P21360-M10X1	MF 10x1	1	90	20	67	7	5,5	8	3
	P21360-M9X1	MF 9x1	1	90	18	67	7	5,5	8	3
P2136005-M10X1.25	P21360-M10X1.25	MF 10x1.25	1,25	100	20	77	7	5,5	8	3
	P21360-M12X0.5	MF 12x0.5	0,5	100	21	73	9	7	10	4
P2136005-M12X1	P21360-M12X1	MF 12x1	1	100	21	73	9	7	10	4
	P21360-M12X1.25	MF 12x1.25	1,25	100	21	73	9	7	10	4
P2136005-M12X1.5	P21360-M12X1.5	MF 12x1.5	1,5	100	21	73	9	7	10	4
	P21360-M14X1	MF 14x1	1	100	21	71	11	9	12	4
	P21360-M14X1.25	MF 14x1.25	1,25	100	21	71	11	9	12	4
P2136005-M14X1.5	P21360-M14X1.5	MF 14x1.5	1,5	100	21	71	11	9	12	4
	P21360-M16X1	MF 16x1	1	100	21	58	12	9	12	4
P2136005-M16X1.5	P21360-M16X1.5	MF 16x1.5	1,5	100	21	58	12	9	12	4
	P21360-M18X1	MF 18x1	1	110	24	66	14	11	14	4
P2136005-M18X1.5	P21360-M18X1.5	MF 18x1.5	1,5	110	24	66	14	11	14	4
	P21360-M18X2	MF 18x2	2	125	30	81	14	11	14	4
	P21360-M20X1	MF 20x1	1	125	24	80	16	12	15	4
P2136005-M20X1.5	P21360-M20X1.5	MF 20x1.5	1,5	125	24	80	16	12	15	4
	P21360-M20X2	MF 20x2	2	140	30	95	16	12	15	4
	P21360-M22X1	MF 22x1	1	125	24	78	18	14,5	17	4
P2136005-M22X1.5	P21360-M22X1.5	MF 22x1.5	1,5	125	24	78	18	14,5	17	4
	P21360-M22X2	MF 22x2	2	140	26	93	18	14,5	17	4
	P21360-M24X1	MF 24x1	1	140	26	93	18	14,5	17	4
P2136005-M24X1.5	P21360-M24X1.5	MF 24x1.5	1,5	140	26	93	18	14,5	17	4
P2136005-M24X2	P21360-M24X2	MF 24x2	2	140	26	93	18	14,5	17	4
	P21360-M25X1.5	MF 25x1.5	1,5	140	26	93	18	14,5	17	4
	P21360-M26X1.5	MF 26x1.5	1,5	140	26	93	18	14,5	17	4

C1

DIN 374

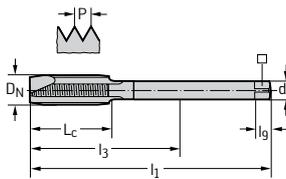

Designation TIN	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	P21360-M27X1	MF 27x1	1	140	26	77	20	16	19	4
	P21360-M27X1.5	MF 27x1.5	1,5	140	26	77	20	16	19	4
P2136005-M27X2	P21360-M27X2	MF 27x2	2	140	26	77	20	16	19	4
	P21360-M28X1.5	MF 28x1.5	1,5	140	26	77	20	16	19	4
	P21360-M30X1	MF 30x1	1	150	26	85	22	18	21	4
P2136005-M30X1.5	P21360-M30X1.5	MF 30x1.5	1,5	150	26	85	22	18	21	4
P2136005-M30X2	P21360-M30X2	MF 30x2	2	150	26	85	22	18	21	4
	P21360-M32X1.5	MF 32x1.5	1,5	150	26	85	22	18	21	4
	P21360-M32X2	MF 32x2	2	150	26	85	22	18	21	4
	P21360-M33X1.5	MF 33x1.5	1,5	160	28	93	25	20	23	4
	P21360-M33X2	MF 33x2	2	160	28	93	25	20	23	4
	P21360-M35X1.5	MF 35x1.5	1,5	170	28	101	28	22	25	4
	P21360-M36X1.5	MF 36x1.5	1,5	170	28	101	28	22	25	4
	P21360-M36X2	MF 36x2	2	170	28	101	28	22	25	4
	P21360-M38X1.5	MF 38x1.5	1,5	170	28	101	28	22	25	5
	P21360-M36X3	MF 36x3	3	200	39	131	28	22	25	4
	P21360-M39X2	MF 39x2	2	170	28	72	32	24	27	4
	P21360-M40X1.5	MF 40x1.5	1,5	170	28	72	32	24	27	5
	P21360-M40X2	MF 40x2	2	170	28	72	32	24	27	4
	P21360-M42X1.5	MF 42x1.5	1,5	170	28	72	32	24	27	5
	P21360-M42X2	MF 42x2	2	170	28	72	32	24	27	4
	P21360-M42X3	MF 42x3	3	200	42	102	32	24	27	4
	P21360-M45X1.5	MF 45x1.5	1,5	180	28	77	36	29	32	5
	P21360-M48X1.5	MF 48x1.5	1,5	190	28	87	36	29	32	5
	P21360-M50X1.5	MF 50x1.5	1,5	190	28	87	36	29	32	5
	P21360-M48X3	MF 48x3	3	225	45	122	36	29	32	4

C1

HSS-E machine taps

mm

Prototex® X-pert P



- Reduced number of grooves
- For long-chipping materials

$\leq 3 \times D_N$

$B=3,5-5$

32HRC
 1000
 -200
 N/mm²

MF
DIN 13

ISO2/6H

	P	M	K	N	S	H	O
uncoated	●●			●			●

DIN 371	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	P21210-M2X0.25	MF 2x0.25	0,25	45	6	9	2,8	2,1	5	2
	P21210-M2.2X0.25	MF 2.2x0.25	0,25	45	7	12	2,8	2,1	5	2
	P21210-M2.3X0.25	MF 2.3x0.25	0,25	45	7	12	2,8	2,1	5	2
	P21210-M2.5X0.35	MF 2.5x0.35	0,35	50	8	12,5	2,8	2,1	5	2
	P21210-M3X0.25	MF 3x0.25	0,25	56	6	18	3,5	2,7	6	2
	P21210-M3X0.35	MF 3x0.35	0,35	56	9	18	3,5	2,7	6	2
	P21210-M3.5X0.35	MF 3.5x0.35	0,35	56	11	20	4	3	6	2
	P21210-M4X0.35	MF 4x0.35	0,35	63	12	21	4,5	3,4	6	2
	P21210-M4X0.5	MF 4x0.5	0,5	63	12	21	4,5	3,4	6	2
	P21210-M4.5X0.5	MF 4.5x0.5	0,5	70	13	25	6	4,9	8	2
	P21210-M5X0.5	MF 5x0.5	0,5	70	13	25	6	4,9	8	3
	P21210-M5X0.75	MF 5x0.75	0,75	70	13	25	6	4,9	8	3
	P21210-M6X0.5	MF 6x0.5	0,5	80	15	30	6	4,9	8	3
	P21210-M6X0.75	MF 6x0.75	0,75	80	15	30	6	4,9	8	3
	P21210-M7X0.75	MF 7x0.75	0,75	80	15	30	7	5,5	8	3
	P21210-M8X1	MF 8x1	1	90	18	35	8	6,2	9	3
P21210-M10X1	MF 10x1	1	90	20	39	10	8	11	3	

C1


HSS-E machine taps

mm

Prototex® X-pert P



– For long-chipping materials

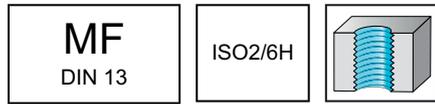

	P	M	K	N	S	H	O
uncoated	●	●	●	●	●	●	●

DIN 374	Designation unbeschichtet	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N	
	P212608-M8X1	MF 8x1	1	90	18	67	6	4,9	8	3
	P212608-M10X1	MF 10x1	1	90	20	67	7	5,5	8	3
	P212608-M12X1	MF 12x1	1	100	21	73	9	7	10	4
	P212608-M12X1.5	MF 12x1.5	1,5	100	21	73	9	7	10	4
	P212608-M14X1.5	MF 14x1.5	1,5	100	21	71	11	9	12	4
	P212608-M16X1	MF 16x1	1	100	21	58	12	9	12	4
	P212608-M16X1.5	MF 16x1.5	1,5	100	21	58	12	9	12	4
	P212608-M18X1.5	MF 18x1.5	1,5	110	24	66	14	11	14	4
	P212608-M20X1.5	MF 20x1.5	1,5	125	24	80	16	12	15	4

HSS-E machine taps

mm

Prototex® X-pert P



- For long-chipping materials

$\leq 3 \times D_N$

$B=3,5-5$

32HRC
 $1000-200$
 N/mm^2

MF

DIN 13

ISO3/6G

	P	M	K	N	S	H	O
uncoated	●	●	●	●	●	●	●
TIN	●	●	●	●	●	●	●

DIN 374		Designation TIN	Designation unbeschichtet	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N	
		P21380-M4X0.5	MF 4x0.5	MF 4x0.5	0,5	63	12	43	2,8	2,1	3	
		P21380-M5X0.5	MF 5x0.5	MF 5x0.5	0,5	70	13	49	3,5	2,7	3	
		P21380-M6X0.5	MF 6x0.5	MF 6x0.5	0,5	80	15	59	4,5	3,4	3	
		P21380-M6X0.75	MF 6x0.75	MF 6x0.75	0,75	80	15	59	4,5	3,4	3	
		P21380-M8X0.75	MF 8x0.75	MF 8x0.75	0,75	80	15	57	6	4,9	3	
	P2138005-M8X1	P21380-M8X1	MF 8x1	MF 8x1	1	90	18	67	6	4,9	8	3
	P2138005-M10X1	P21380-M10X1	MF 10x1	MF 10x1	1	90	20	67	7	5,5	8	3
		P21380-M10X1.25	MF 10x1.25	MF 10x1.25	1,25	100	20	77	7	5,5	8	3
	P2138005-M12X1	P21380-M12X1	MF 12x1	MF 12x1	1	100	21	73	9	7	10	4
		P21380-M12X1.25	MF 12x1.25	MF 12x1.25	1,25	100	21	73	9	7	10	4
	P2138005-M12X1.5	P21380-M12X1.5	MF 12x1.5	MF 12x1.5	1,5	100	21	73	9	7	10	4
	P2138005-M14X1.5	P21380-M14X1.5	MF 14x1.5	MF 14x1.5	1,5	100	21	71	11	9	12	4
	P2138005-M16X1.5	P21380-M16X1.5	MF 16x1.5	MF 16x1.5	1,5	100	21	58	12	9	12	4
		P21380-M18X1.5	MF 18x1.5	MF 18x1.5	1,5	110	24	66	14	11	14	4
		P21380-M20X1.5	MF 20x1.5	MF 20x1.5	1,5	125	24	80	16	12	15	4
	P21380-M22X1.5	MF 22x1.5	MF 22x1.5	1,5	125	24	78	18	14,5	17	4	
	P21380-M24X1.5	MF 24x1.5	MF 24x1.5	1,5	140	26	93	18	14,5	17	4	

C1


HSS-E machine taps

mm

Prototex® X-pert M



– For long-chipping materials



DIN 371	Designation TIN	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	M2121305-M5X0.5	MF 5x0.5	0,5	70	13	25	6	4,9	8	3
	M2121305-M6X0.5	MF 6x0.5	0,5	80	15	30	6	4,9	8	3
	M2121305-M6X0.75	MF 6x0.75	0,75	80	15	30	6	4,9	8	3

DIN 374	Designation TIN	Designation VAP	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N										
	M2126305-M8X0.5	M21263-M8X0.5	MF 8x0.5	0,5	80	15	57	6	4,9	8	3										
	M2126305-M8X0.75	M21263-M8X0.75	MF 8x0.75	0,75	80	15	57	6	4,9	8	3										
	M2126305-M8X1	M21263-M8X1	MF 8x1	1	90	18	67	6	4,9	8	3										
			MF 10x0.75	0,75	90	20	67	7	5,5	8	3										
	M2126305-M10X1	M21263-M10X1	MF 10x1	1	90	20	67	7	5,5	8	3										
	M2126305-M10X1.25	M21263-M10X1.25	MF 10x1.25	1,25	100	20	77	7	5,5	8	3										
												M21263-M12X1	MF 12x1	1	100	21	73	9	7	10	4
													MF 12x1.25	1,25	100	21	73	9	7	10	4
	M2126305-M12X1.5	M21263-M12X1.5	MF 12x1.5	1,5	100	21	73	9	7	10	4										
	M2126305-M14X1.5	M21263-M14X1.5	MF 14x1.5	1,5	100	21	71	11	9	12	4										
												M21263-M16X1	MF 16x1	1	100	21	58	12	9	12	4
	M2126305-M16X1.5	M21263-M16X1.5	MF 16x1.5	1,5	100	21	58	12	9	12	4										
	M2126305-M18X1.5	M21263-M18X1.5	MF 18x1.5	1,5	110	24	66	14	11	14	4										
	M2126305-M20X1.5	M21263-M20X1.5	MF 20x1.5	1,5	125	24	80	16	12	15	4										
												M21263-M22X1.5	MF 22x1.5	1,5	125	24	78	18	14,5	17	4
	M2126305-M24X1.5	M21263-M24X1.5	MF 24x1.5	1,5	140	26	93	18	14,5	17	4										

C1

HSS-E machine taps

mm


Prototex® X-pert M



- For long-chipping materials

MF
DIN 13

6GX




$\leq 3 \times D_N$

$B=3,5-5$

36HRC
1200
-700
N/mm²

	P	M	K	N	S	H	O
TIN	●	●●					

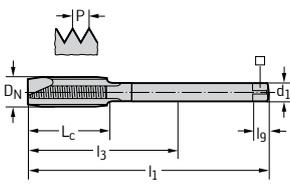DIN 374	Designation TIN	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	M2128305-M12X1.5	MF 12x1.5	1,5	100	21	73	9	7	10	4
	M2128305-M14X1.5	MF 14x1.5	1,5	100	21	71	11	9	12	4
	M2128305-M16X1.5	MF 16x1.5	1,5	100	21	58	12	9	12	4
	M2128305-M20X1.5	MF 20x1.5	1,5	125	24	80	16	12	15	4
	M2128305-M24X1.5	MF 24x1.5	1,5	140	26	93	18	14,5	17	4

C1


HSS-E PM machine taps

mm

Prototex® TiNi



- Recommended with oil
- For long-chipping materials



	P	M	K	N	S	H	O
uncoated	●●	●●	●●	●●	●●	●●	●●
TiCN	●●	●●	●●	●●	●●	●●	●●

~DIN 371	Designation TiCN	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l ₉ mm	N
	21216106-M8X0.75	212161-M8X0.75	MF 8x0.75	0,75	80	10	29	8	6,2	9	3
	21216106-M8X1	212161-M8X1	MF 8x1	1	90	12	29	8	6,2	9	3
		212161-M10X1	MF 10x1	1	90	14	33	10	8	11	3

DIN 374	Designation TiCN	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l ₉ mm	N
	21266106-M10X1.25	212661-M10X1.25	MF 10x1.25	1,25	100	20	77	7	5,5	8	3
	21266106-M12X1	212661-M12X1	MF 12x1	1	100	16	73	9	7	10	4
	21266106-M12X1.25	212661-M12X1.25	MF 12x1.25	1,25	100	21	73	9	7	10	4
	21266106-M12X1.5	212661-M12X1.5	MF 12x1.5	1,5	100	21	73	9	7	10	4
	21266106-M14X1	212661-M14X1	MF 14x1	1	100	16	71	11	9	12	4
	21266106-M14X1.5	212661-M14X1.5	MF 14x1.5	1,5	100	21	71	11	9	12	4
	21266106-M16X1	212661-M16X1	MF 16x1	1	100	18	58	12	9	12	4

C1

HSS-E PM machine taps

mm

Prototex® TiNi Plus



- Recommended with emulsion
- For long-chipping materials

≤
2×DN

B=3,5-5

44HRC
1400
-700
N/mm²

MF
DIN 13

6HX

	P	M	K	N	S	H	O
ACN					●●		

~DIN 371	Designation	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	ACN									
	2121763-M6X0.75	MF 6x0.75	0,75	80	15	23	6	4,9	8	3
	2121763-M8X0.75	MF 8x0.75	0,75	90	18	29,5	8	6,2	9	3
	2121763-M8X1	MF 8x1	1	90	18	29,5	8	6,2	9	3
	2121763-M10X1	MF 10x1	1	100	20	33,5	10	8	11	3

DIN 374	Designation	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	ACN									
	2126763-M12X1	MF 12x1	1	100	21	73	9	7	10	4
	2126763-M12X1.5	MF 12x1.5	1,5	100	21	73	9	7	10	4
	2126763-M14X1.5	MF 14x1.5	1,5	100	21	71	11	9	12	4

C1


HSS-E PM machine taps

mm

Prototex® Sprint



– For long-chipping materials



	P	M	K	N	S	H	O
TIN	●	●	●	●	●	●	●

DIN 374		Designation TIN	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N
	7126365-M8X1	MF 8x1	1	90	18	62	6	4,9	8	3
	7126365-M10X1	MF 10x1	1	90	20	62	7	5,5	8	3
	7126365-M12X1.5	MF 12x1.5	1,5	100	21	66	9	7	10	4
	7126365-M12X1.25	MF 12x1.25	1,25	100	21	67	9	7	10	4
	7126365-M14X1.5	MF 14x1.5	1,5	100	21	64	11	9	12	4
	7126365-M16X1.5	MF 16x1.5	1,5	100	21	51	12	9	12	4
	7126365-M20X1.5	MF 20x1.5	1,5	125	24	73	16	12	15	4


HSS-E PM machine taps

mm

Paradur® Eco Plus



– For long-chipping materials



DIN 374	Designation THL	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	EP2156302-M6X0.75	MF 6x0.75	0,75	80	10	59	4,5	3,4	6	3
	EP2156302-M8X1	MF 8x1	1	90	12	67	6	4,9	8	3
	EP2156302-M10X1	MF 10x1	1	90	12	67	7	5,5	8	3
	EP2156302-M10X1.25	MF 10x1.25	1,25	100	15	77	7	5,5	8	3
	EP2156302-M12X1	MF 12x1	1	100	13	73	9	7	10	4
	EP2156302-M12X1.25	MF 12x1.25	1,25	100	13	73	9	7	10	4
	EP2156302-M12X1.5	MF 12x1.5	1,5	100	13	73	9	7	10	4
	EP2156302-M14X1.25	MF 14x1.25	1,25	100	15	71	11	9	12	4
	EP2156302-M14X1.5	MF 14x1.5	1,5	100	15	71	11	9	12	4
	EP2156302-M16X1.5	MF 16x1.5	1,5	100	15	58	12	9	12	4
	EP2156302-M18X1.5	MF 18x1.5	1,5	110	17	66	14	11	14	4
	EP2156302-M20X1.5	MF 20x1.5	1,5	125	17	80	16	12	15	4
	EP2156302-M22X1.5	MF 22x1.5	1,5	125	18	78	18	14,5	17	4

C1



HSS-E PM machine taps

mm

Paradur® Eco Plus



– For long-chipping materials



DIN 374	Designation THL	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	EP2156362-M8X1	MF 8x1	1	90	12	67	6	4,9	8	4
	EP2156362-M10X1	MF 10x1	1	90	12	67	7	5,5	8	4
	EP2156362-M12X1.5	MF 12x1.5	1,5	100	13	73	9	7	10	4
	EP2156362-M14X1.5	MF 14x1.5	1,5	100	15	71	11	9	12	4

HSS-E PM machine taps

mm

Paradur® Eco Plus



– For long-chipping materials



	P	M	K	N	S	H	O
THL	●●	●●	●●	●●			

DIN 374	Designation THL	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	EP2156312-M8X1	MF 8x1	1	90	12	67	6	4,9	8	3
	EP2156312-M10X1	MF 10x1	1	90	12	67	7	5,5	8	3
	EP2156312-M10X1.25	MF 10x1.25	1,25	100	15	77	7	5,5	8	3
	EP2156312-M12X1	MF 12x1	1	100	13	73	9	7	10	4
	EP2156312-M12X1.25	MF 12x1.25	1,25	100	13	73	9	7	10	4
	EP2156312-M12X1.5	MF 12x1.5	1,5	100	13	73	9	7	10	4
	EP2156312-M14X1.5	MF 14x1.5	1,5	100	15	71	11	9	12	4
	EP2156312-M16X1.5	MF 16x1.5	1,5	100	15	58	12	9	12	4
	EP2156312-M18X1.5	MF 18x1.5	1,5	110	17	66	14	11	14	4
	EP2156312-M20X1.5	MF 20x1.5	1,5	125	17	80	16	12	15	4


C1

HSS-E machine taps

TC115 Perform



- For long-chipping materials



	P	M	K	N	S	H	O
WY80AA	●	●	●	●			
WY80FC	●	●	●	●			

DIN 374	Designation	Designation	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	□	l_9 mm	N
	WY80AA	WY80FC									
	TC115-M8X1-L0-	TC115-M8X1-L0-	MF 8x1	1	90	12	67	6	4,9	8	3
	TC115-M10X1-L0-	TC115-M10X1-L0-	MF 10x1	1	90	12	67	7	5,5	8	3
	TC115-M10X1.25-L0-	TC115-M10X1.25-L0-	MF 10x1.25	1,25	100	15	77	7	5,5	8	3
	TC115-M12X1.25-L0-	TC115-M12X1.25-L0-	MF 12x1.25	1,25	100	13	73	9	7	10	4
	TC115-M12X1.5-L0-	TC115-M12X1.5-L0-	MF 12x1.5	1,5	100	13	73	9	7	10	4
	TC115-M14X1.5-L0-	TC115-M14X1.5-L0-	MF 14x1.5	1,5	100	15	71	11	9	12	4
	TC115-M16X1.5-L0-	TC115-M16X1.5-L0-	MF 16x1.5	1,5	100	15	58	12	9	12	4
	TC115-M18X1.5-L0-	TC115-M18X1.5-L0-	MF 18x1.5	1,5	110	17	66	14	11	14	4

Ordering example for the grade WY80AA: TC115-M10X1-L0-WY80AA

HSS-E machine taps

mm

Paradur® Synchrospeed



- For long-chipping materials
- Only for synchronous machining (rigid tapping)

$\leq 2,5 \times D_N$

$C=2-3$

$\angle 40^\circ$

40HRC
1300 N/mm²

MF
DIN 13

6HX

	P	M	K	N	S	H	O
THL	●	●	●	●	●		●
TIN/VAP	●	●	●	●	●		●

~DIN 371	Designation	Designation	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h6 mm	□	l_9 mm	N
	THL	TIN/VAP									
	S2156302-M8X1	S2156305-M8X1	MF 8x1	1	90	10,5	35	8	6,2	9	3
	S2156302-M10X1	S2156305-M10X1	MF 10x1	1	90	10,5	39	10	8	11	3
	S2156302-M10X1.25	S2156305-M10X1.25	MF 10x1.25	1,25	100	13,5	39	10	8	11	3
	S2156302-M12X1.25		MF 12x1.25	1,25	100	13,5	42	12	9	12	3
	S2156302-M12X1.5	S2156305-M12X1.5	MF 12x1.5	1,5	100	16	42	12	9	12	3
	S2156302-M14X1.5	S2156305-M14X1.5	MF 14x1.5	1,5	100	16	49	14	11	14	4
	S2156302-M16X1.5	S2156305-M16X1.5	MF 16x1.5	1,5	100	16	50	16	12	15	4

C1


HSS-E machine taps

mm

Paradur® H



– For long- and short-chipping materials




	P	M	K	N	S	H	O
uncoated			●	●●			●


DIN 371	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	N
	21311-M2.2X0.25	MF 2.2x0.25	0,25	45	7	12	2,8	3
	21311-M2X0.25	MF 2x0.25	0,25	45	6	9	2,8	3
	21311-M2.5X0.35	MF 2.5x0.35	0,35	50	8	12,5	2,8	3
	21311-M3X0.35	MF 3x0.35	0,35	56	9	18	3,5	3
	21311-M3.5X0.35	MF 3.5x0.35	0,35	56	11	20	4	3
	21311-M4X0.35	MF 4x0.35	0,35	63	12	21	4,5	3
	21311-M5X0.35	MF 5x0.35	0,35	70	13	25	6	3
	21311-M4X0.5	MF 4x0.5	0,5	63	12	21	4,5	3
	21311-M5X0.5	MF 5x0.5	0,5	70	13	25	6	3
	21311-M6X0.75	MF 6x0.75	0,75	80	15	30	6	3
	21311-M7X0.75	MF 7x0.75	0,75	80	15	30	7	3

C1

DIN 374

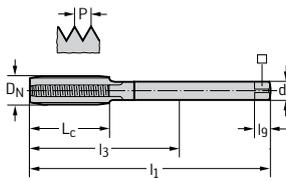

Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	N
21361-M4X0.5	MF 4x0.5	0,5	63	12	43	2,8	3
21361-M5X0.5	MF 5x0.5	0,5	70	13	49	3,5	3
21361-M8X0.5	MF 8x0.5	0,5	80	15	57	6	3
21361-M8X0.75	MF 8x0.75	0,75	80	15	57	6	3
21361-M7X0.5	MF 7x0.5	0,5	80	15	58	5,5	3
21361-M7X0.75	MF 7x0.75	0,75	80	15	58	5,5	3
21361-M15X1.5	MF 15x1.5	1,5	100	21	58	12	4
21361-M16X1	MF 16x1	1	100	21	58	12	4
21361-M16X1.5	MF 16x1.5	1,5	100	21	58	12	4
21361-M6X0.5	MF 6x0.5	0,5	80	15	59	4,5	3
21361-M6X0.75	MF 6x0.75	0,75	80	15	59	4,5	3
21361-M52X1.5	MF 52x1.5	1,5	190	29	60	40	6
21361-M52X2	MF 52x2	2	190	32	60	40	6
21361-M11X1	MF 11x1	1	90	20	66	8	3
21361-M18X1	MF 18x1	1	110	24	66	14	4
21361-M18X1.5	MF 18x1.5	1,5	110	24	66	14	4
21361-M8X1	MF 8x1	1	90	18	67	6	3
21361-M10X0.5	MF 10x0.5	0,5	90	20	67	7	3
21361-M10X0.75	MF 10x0.75	0,75	90	20	67	7	3
21361-M10X1	MF 10x1	1	90	20	67	7	3
21361-M9X0.5	MF 9x0.5	0,5	90	15	67	7	3
21361-M9X0.75	MF 9x0.75	0,75	90	15	67	7	3
21361-M9X1	MF 9x1	1	90	18	67	7	3
21361-M14X1	MF 14x1	1	100	21	71	11	4
21361-M14X1.25	MF 14x1.25	1,25	100	21	71	11	4
21361-M14X1.5	MF 14x1.5	1,5	100	21	71	11	4
21361-M39X1.5	MF 39x1.5	1,5	170	28	72	32	6
21361-M40X1.5	MF 40x1.5	1,5	170	28	72	32	6
21361-M40X2	MF 40x2	2	170	28	72	32	4
21361-M42X1.5	MF 42x1.5	1,5	170	28	72	32	6
21361-M42X2	MF 42x2	2	170	28	72	32	4
21361-M12X0.5	MF 12x0.5	0,5	100	21	73	9	3
21361-M12X0.75	MF 12x0.75	0,75	100	21	73	9	4
21361-M12X1	MF 12x1	1	100	21	73	9	4
21361-M12X1.25	MF 12x1.25	1,25	100	21	73	9	4

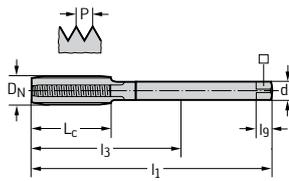DIN 374


Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	N
21361-M12X1.5	MF 12x1.5	1,5	100	21	73	9	4
21361-M10X1.25	MF 10x1.25	1,25	100	20	77	7	3
21361-M27X1	MF 27x1	1	140	26	77	20	4
21361-M27X1.5	MF 27x1.5	1,5	140	26	77	20	4
21361-M27X2	MF 27x2	2	140	26	77	20	4
21361-M28X1.5	MF 28x1.5	1,5	140	26	77	20	4
21361-M28X2	MF 28x2	2	140	26	77	20	4
21361-M45X1.5	MF 45x1.5	1,5	180	28	77	36	6
21361-M45X2	MF 45x2	2	180	30	77	36	6
21361-M22X1	MF 22x1	1	125	24	78	18	4
21361-M22X1.5	MF 22x1.5	1,5	125	24	78	18	4
21361-M20X1	MF 20x1	1	125	24	80	16	4
21361-M20X1.5	MF 20x1.5	1,5	125	24	80	16	4
21361-M18X2	MF 18x2	2	125	30	81	14	4
21361-M30X1	MF 30x1	1	150	26	85	22	4
21361-M30X1.5	MF 30x1.5	1,5	150	26	85	22	4
21361-M30X2	MF 30x2	2	150	26	85	22	4
21361-M32X1.5	MF 32x1.5	1,5	150	26	85	22	4
21361-M48X1.5	MF 48x1.5	1,5	190	28	87	36	6
21361-M48X2	MF 48x2	2	190	30	87	36	6
21361-M50X1.5	MF 50x1.5	1,5	190	28	87	36	6
21361-M22X2	MF 22x2	2	140	26	93	18	4
21361-M24X1	MF 24x1	1	140	26	93	18	4
21361-M24X1.5	MF 24x1.5	1,5	140	26	93	18	4
21361-M24X2	MF 24x2	2	140	26	93	18	4
21361-M25X1.5	MF 25x1.5	1,5	140	26	93	18	4
21361-M26X1.5	MF 26x1.5	1,5	140	26	93	18	4
21361-M33X1.5	MF 33x1.5	1,5	160	28	93	25	4
21361-M33X2	MF 33x2	2	160	28	93	25	4
21361-M20X2	MF 20x2	2	140	30	95	16	4
21361-M52X3	MF 52x3	3	225	45	95	40	6
21361-M45X3	MF 45x3	3	200	42	97	36	4
21361-M35X1.5	MF 35x1.5	1,5	170	28	101	28	4
21361-M36X1.5	MF 36x1.5	1,5	170	28	101	28	4
21361-M36X2	MF 36x2	2	170	28	101	28	4
21361-M38X1.5	MF 38x1.5	1,5	170	28	101	28	6
21361-M39X3	MF 39x3	3	200	42	102	32	4
21361-M42X3	MF 42x3	3	200	42	102	32	4
21361-M48X3	MF 48x3	3	225	45	122	36	4
21361-M36X3	MF 36x3	3	200	39	131	28	4



HSS-E machine taps

mm

Paradur® H



– For long- and short-chipping materials



	P	M	K	N	S	H	O
uncoated			●	●●			●

DIN 374	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	N
	21368-M4X0.5	MF 4x0.5	0,5	63	12	43	2,8	3
	21368-M5X0.5	MF 5x0.5	0,5	70	13	49	3,5	3
	21368-M6X0.5	MF 6x0.5	0,5	80	15	59	4,5	3
	21368-M8X0.5	MF 8x0.5	0,5	80	15	57	6	3
	21368-M6X0.75	MF 6x0.75	0,75	80	15	59	4,5	3
	21368-M8X0.75	MF 8x0.75	0,75	80	15	57	6	3
	21368-M10X0.75	MF 10x0.75	0,75	90	20	67	7	3
	21368-M8X1	MF 8x1	1	90	18	67	6	3
	21368-M10X1	MF 10x1	1	90	20	67	7	3
	21368-M12X1	MF 12x1	1	100	21	73	9	4
	21368-M14X1	MF 14x1	1	100	21	71	11	4
	21368-M16X1	MF 16x1	1	100	21	58	12	4
	21368-M12X1.5	MF 12x1.5	1,5	100	21	73	9	4
	21368-M14X1.5	MF 14x1.5	1,5	100	21	71	11	4
	21368-M16X1.5	MF 16x1.5	1,5	100	21	58	12	4
	21368-M18X1.5	MF 18x1.5	1,5	110	24	66	14	4
	21368-M20X1.5	MF 20x1.5	1,5	125	24	80	16	4
	21368-M22X1.5	MF 22x1.5	1,5	125	24	78	18	4
	21368-M24X1.5	MF 24x1.5	1,5	140	26	93	18	4

C1


HSS-E machine taps

mm

Paradur® HN



– For short-chipping materials



	P	M	K	N	S	H	O
uncoated	●●		●●	●●			

DIN 374	Designation unbeschichtet	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	□	l_g mm	N
	213614-M12X1.5	MF 12x1.5	1,5	100	21	73	9	7	10	5
	213614-M14X1.5	MF 14x1.5	1,5	100	21	71	11	9	12	6
	213614-M16X1.5	MF 16x1.5	1,5	100	21	58	12	9	12	6
	213614-M18X1.5	MF 18x1.5	1,5	110	24	66	14	11	14	6
	213614-M20X1.5	MF 20x1.5	1,5	125	24	80	16	12	15	6
	213614-M22X1.5	MF 22x1.5	1,5	125	24	78	18	14,5	17	6

HSS-E machine taps

TC130 Supreme



- WY80AA: High Performance
- WY80EH: Excellent Performance

$\leq 3,5 \times D_N$

$C=2-3$

44HRC
1400-700 N/mm²

MF
DIN 13

6HX

	P	M	K	N	S	H	O
WY80AA	●	●	●	●	●	●	●
WY80EH	●	●	●	●	●	●	●

DIN 374	Designation	Designation	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	□	l_9 mm	N
	WY80AA	WY80EH									
	TC130-M10X1-L1-	TC130-M10X1-L1-	MF 10x1	1	90	20	67	7	5,5	8	3
	TC130-M12X1.5-L1-	TC130-M12X1.5-L1-	MF 12x1.5	1,5	100	21	73	9	7	10	3
	TC130-M14X1.5-L1-	TC130-M14X1.5-L1-	MF 14x1.5	1,5	100	21	71	11	9	12	3
	TC130-M16X1.5-L1-	TC130-M16X1.5-L1-	MF 16x1.5	1,5	100	21	58	12	9	12	3
	TC130-M18X1.5-L1-	TC130-M18X1.5-L1-	MF 18x1.5	1,5	110	24	66	14	11	14	3
	TC130-M20X1.5-L1-	TC130-M20X1.5-L1-	MF 20x1.5	1,5	125	24	80	16	12	15	3
	TC130-M22X1.5-L1-	TC130-M22X1.5-L1-	MF 22x1.5	1,5	125	24	78	18	14,5	17	3
	TC130-M24X1.5-L1-		MF 24x1.5	1,5	140	26	93	18	14,5	17	4
	TC130-M30X2-L1-		MF 30x2	2	150	26	85	22	18	21	4
	TC130-M33X2-L1-		MF 33x2	2	160	28	93	25	20	23	4

Ordering example for the grade WY80AA: TC130-M10X1-L1-WY80AA

C1


HSS-E machine taps

mm

Paradur® N



- For long-chipping materials



	P	M	K	N	S	H	O
uncoated	●●	●	●●	●●	●	●	●

DIN 371	Designation unbeschichtet	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N	
	21410-M4X0.5	MF 4x0.5	0,5	63	7	21	4,5	3,4	6	3
	21410-M5X0.5	MF 5x0.5	0,5	70	8	25	6	4,9	8	3
	21410-M6X0.5	MF 6x0.5	0,5	80	10	30	6	4,9	8	3
	21410-M6X0.75	MF 6x0.75	0,75	80	10	30	6	4,9	8	3

l_g dimensions in accordance with DIN 10

DIN 374		Designation TICN	Designation TIN	Designation unbeschichtet	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	\square	l_9 mm	N
		2146005-M8X0.75	21460-M8X0.75	MF 8x0.75	0,75	80	10	57	6	4,9	8	3	
	2146006-M8X1	2146005-M8X1	21460-M8X1	MF 8x1	1	90	13	67	6	4,9	8	3	
	2146006-M10X1	2146005-M10X1	21460-M10X1	MF 10x1	1	90	12	67	7	5,5	8	3	
	2146006-M12X1	2146005-M12X1	21460-M12X1	MF 12x1	1	100	13	73	9	7	10	3	
			21460-M14X1	MF 14x1	1	100	15	71	11	9	12	4	
			21460-M16X1	MF 16x1	1	100	15	58	12	9	12	4	
			21460-M10X1.25	MF 10x1.25	1,25	100	15	77	7	5,5	8	3	
			21460-M12X1.25	MF 12x1.25	1,25	100	13	73	9	7	10	3	
			21460-M14X1.25	MF 14x1.25	1,25	100	15	71	11	9	12	4	
	2146006-M12X1.5	2146005-M12X1.5	21460-M12X1.5	MF 12x1.5	1,5	100	21	73	9	7	10	3	
	2146006-M14X1.5	2146005-M14X1.5	21460-M14X1.5	MF 14x1.5	1,5	100	21	71	11	9	12	4	
	2146006-M16X1.5	2146005-M16X1.5	21460-M16X1.5	MF 16x1.5	1,5	100	21	58	12	9	12	4	
	2146006-M18X1.5	2146005-M18X1.5	21460-M18X1.5	MF 18x1.5	1,5	110	24	66	14	11	14	4	
	2146006-M20X1.5	2146005-M20X1.5	21460-M20X1.5	MF 20x1.5	1,5	125	24	80	16	12	15	4	
		2146005-M22X1.5	21460-M22X1.5	MF 22x1.5	1,5	125	24	78	18	14,5	17	4	
		2146005-M24X1.5	21460-M24X1.5	MF 24x1.5	1,5	140	26	93	18	14,5	17	4	
			21460-M26X1.5	MF 26x1.5	1,5	140	26	93	18	14,5	17	4	
			21460-M27X1.5	MF 27x1.5	1,5	140	26	77	20	16	19	4	
			21460-M28X1.5	MF 28x1.5	1,5	140	26	77	20	16	19	4	
			21460-M30X1.5	MF 30x1.5	1,5	150	26	85	22	18	21	4	
		21460-M36X1.5	MF 36x1.5	1,5	170	28	101	28	22	25	4		
		21460-M20X2	MF 20x2	2	140	30	95	16	12	15	4		
		21460-M24X2	MF 24x2	2	140	26	93	18	14,5	17	4		
		21460-M27X2	MF 27x2	2	140	26	77	20	16	19	4		
		21460-M30X2	MF 30x2	2	150	26	85	22	18	21	4		

l_9 dimensions in accordance with DIN 10

C1


HSS-E machine taps

mm

Paradur® N



– For long-chipping materials



	P	M	K	N	S	H	O
uncoated	●●		●●	●●			
TIN	●●		●●	●●			

DIN 374		Designation TIN	Designation unbeschichtet	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_9 mm	N	
			21480-M4X0.5	MF 4x0.5	0,5	63	7	43	2,8	2,1	3	
			21480-M5X0.5	MF 5x0.5	0,5	70	8	49	3,5	2,7	3	
			21480-M6X0.5	MF 6x0.5	0,5	80	10	59	4,5	3,4	3	
			21480-M6X0.75	MF 6x0.75	0,75	80	10	59	4,5	3,4	3	
			21480-M8X0.75	MF 8x0.75	0,75	80	10	57	6	4,9	3	
		2148005-M8X1	21480-M8X1	MF 8x1	1	90	13	67	6	4,9	8	3
		2148005-M10X1	21480-M10X1	MF 10x1	1	90	12	67	7	5,5	8	3
		2148005-M12X1	21480-M12X1	MF 12x1	1	100	13	73	9	7	10	3
		2148005-M12X1.5	21480-M12X1.5	MF 12x1.5	1,5	100	21	73	9	7	10	3
		2148005-M14X1.5	21480-M14X1.5	MF 14x1.5	1,5	100	21	71	11	9	12	4
	2148005-M16X1.5	21480-M16X1.5	MF 16x1.5	1,5	100	21	58	12	9	12	4	
			21480-M18X1.5	MF 18x1.5	1,5	110	24	66	14	11	4	
			21480-M20X1.5	MF 20x1.5	1,5	125	24	80	16	12	4	
			21480-M22X1.5	MF 22x1.5	1,5	125	24	78	18	14,5	4	

C1


HSS-E machine taps

mm

Paradur® X-pert P




– For long-chipping materials



	P	M	K	N	S	H	O
uncoated	●●	●	●	●	●	●	●

DIN 371	Designation unbeschichtet	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N	
	P21519-M3X0.25	MF 3x0.25	0,25	56	6	18	3,5	2,7	6	3
	P21519-M2.5X0.35	MF 2.5x0.35	0,35	50	4	12,5	2,8	2,1	5	3
	P21519-M3X0.35	MF 3x0.35	0,35	56	6	18	3,5	2,7	6	3
	P21519-M4X0.35	MF 4x0.35	0,35	63	7	21	4,5	3,4	6	3
	P21519-M4X0.5	MF 4x0.5	0,5	63	7	21	4,5	3,4	6	3
	P21519-M4.5X0.5	MF 4.5x0.5	0,5	70	8	25	6	4,9	8	3
	P21519-M5X0.5	MF 5x0.5	0,5	70	8	25	6	4,9	8	3
	P21519-M6X0.5	MF 6x0.5	0,5	80	10	30	6	4,9	8	3
	P21519-M6X0.75	MF 6x0.75	0,75	80	10	30	6	4,9	8	3
	P21519-M7X0.75	MF 7x0.75	0,75	80	10	30	7	5,5	8	3
	P21519-M8X1	MF 8x1	1	90	12	35	8	6,2	9	3
	P21519-M10X1	MF 10x1	1	90	12	39	10	8	11	3


C1

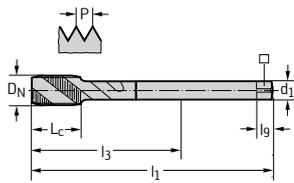DIN 374


Designation TIN	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h ₉ mm	□	l _g mm	N
	P21569-M8X0.75	MF 8x0.75	0,75	80	10	57	6	4,9	8	3
	P21569-M10X0.75	MF 10x0.75	0,75	90	12	67	7	5,5	8	3
P2156905-M8X1	P21569-M8X1	MF 8x1	1	90	12	67	6	4,9	8	3
P2156905-M10X1	P21569-M10X1	MF 10x1	1	90	12	67	7	5,5	8	3
	P21569-M9X1	MF 9x1	1	90	13	67	7	5,5	8	3
P2156905-M12X1	P21569-M12X1	MF 12x1	1	100	13	73	9	7	10	4
	P21569-M14X1	MF 14x1	1	100	15	71	11	9	12	4
	P21569-M16X1	MF 16x1	1	100	15	58	12	9	12	4
	P21569-M18X1	MF 18x1	1	110	17	66	14	11	14	4
	P21569-M20X1	MF 20x1	1	125	17	80	16	12	15	4
	P21569-M22X1	MF 22x1	1	125	18	78	18	14,5	17	4
	P21569-M24X1	MF 24x1	1	140	20	93	18	14,5	17	5
P2156905-M10X1.25	P21569-M10X1.25	MF 10x1.25	1,25	100	15	77	7	5,5	8	3
P2156905-M12X1.25	P21569-M12X1.25	MF 12x1.25	1,25	100	13	73	9	7	10	4
	P21569-M14X1.25	MF 14x1.25	1,25	100	15	71	11	9	12	4
P2156905-M12X1.5	P21569-M12X1.5	MF 12x1.5	1,5	100	13	73	9	7	10	4
P2156905-M14X1.5	P21569-M14X1.5	MF 14x1.5	1,5	100	15	71	11	9	12	4
P2156905-M16X1.5	P21569-M16X1.5	MF 16x1.5	1,5	100	15	58	12	9	12	4
P2156905-M18X1.5	P21569-M18X1.5	MF 18x1.5	1,5	110	17	66	14	11	14	4
P2156905-M20X1.5	P21569-M20X1.5	MF 20x1.5	1,5	125	17	80	16	12	15	4
P2156905-M22X1.5	P21569-M22X1.5	MF 22x1.5	1,5	125	18	78	18	14,5	17	4
	P21569-M24X1.5	MF 24x1.5	1,5	140	20	93	18	14,5	17	5
	P21569-M26X1.5	MF 26x1.5	1,5	140	20	93	18	14,5	17	5
	P21569-M27X1.5	MF 27x1.5	1,5	140	20	77	20	16	19	5
	P21569-M30X1.5	MF 30x1.5	1,5	150	20	85	22	18	21	5
	P21569-M32X1.5	MF 32x1.5	1,5	150	20	85	22	18	21	5
	P21569-M33X1.5	MF 33x1.5	1,5	160	22	93	25	20	23	5
	P21569-M36X1.5	MF 36x1.5	1,5	170	22	101	28	22	25	5
	P21569-M38X1.5	MF 38x1.5	1,5	170	22	101	28	22	25	5
	P21569-M40X1.5	MF 40x1.5	1,5	170	22	72	32	24	27	5
	P21569-M42X1.5	MF 42x1.5	1,5	170	22	72	32	24	27	6
	P21569-M45X1.5	MF 45x1.5	1,5	180	22	77	36	29	32	6
	P21569-M48X1.5	MF 48x1.5	1,5	190	22	87	36	29	32	6
	P21569-M20X2	MF 20x2	2	140	25	95	16	12	15	4
	P21569-M22X2	MF 22x2	2	140	20	93	18	14,5	17	4

C1

DIN 374

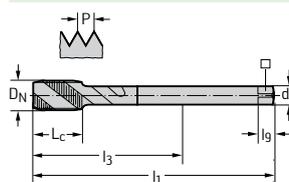

Designation TIN	Designation unbeschichtet	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_9 mm	N	
	P21569-M24X2	MF 24x2	2	140	20	93	18	14,5	17	5
	P21569-M27X2	MF 27x2	2	140	20	77	20	16	19	5
	P21569-M30X2	MF 30x2	2	150	20	85	22	18	21	5
	P21569-M33X2	MF 33x2	2	160	22	93	25	20	23	5
	P21569-M36X2	MF 36x2	2	170	22	101	28	22	25	5
	P21569-M39X2	MF 39x2	2	170	22	72	32	24	27	5
	P21569-M42X2	MF 42x2	2	170	22	72	32	24	27	6
	P21569-M48X2	MF 48x2	2	190	24	87	36	29	32	6
	P21569-M36X3	MF 36x3	3	200	30	131	28	22	25	5
	P21569-M39X3	MF 39x3	3	200	33	102	32	24	27	5
	P21569-M42X3	MF 42x3	3	200	33	102	32	24	27	6
	P21569-M48X3	MF 48x3	3	225	36	122	36	29	32	6
	P21569-M52X3	MF 52x3	3	225	36	95	40	32	35	6


HSS-E machine taps

mm

Paradur® X-pert P



- For long-chipping materials



	P	M	K	N	S	H	O
uncoated	●	●	●	●	●	●	●
TIN	●	●	●	●	●	●	●

DIN 374	Designation	Designation	D _N	P	l ₁	L _c	l ₃	d ₁	h ₉	□	l ₉	N
	TIN	unbeschichtet										
	P2158905-M8X1	P21589-M8X1	MF 8x1	1	90	12	67	6	4,9	8	3	
	P2158905-M10X1	P21589-M10X1	MF 10x1	1	90	12	67	7	5,5	8	3	
	P2158905-M12X1	P21589-M12X1	MF 12x1	1	100	13	73	9	7	10	4	
	P2158905-M12X1.5	P21589-M12X1.5	MF 12x1.5	1,5	100	13	73	9	7	10	4	
	P2158905-M14X1.5	P21589-M14X1.5	MF 14x1.5	1,5	100	15	71	11	9	12	4	
	P2158905-M16X1.5	P21589-M16X1.5	MF 16x1.5	1,5	100	15	58	12	9	12	4	
	P2158905-M18X1.5		MF 18x1.5	1,5	110	17	66	14	11	14	4	

C1

HSS-E machine taps

mm

Paradur® Short Chip HT



- For long-chipping materials



	P	M	K	N	S	H	O
THL	●	●	●	●	●	●	●
uncoated	●	●	●	●	●	●	●

DIN 376		Designation THL	Designation unbeschichtet	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_9 mm	N
		21460T2-M12X1.5	21460TR-M12X1.5	MF 12x1.5	1,5	100	13	58	9	7	3
		21460T2-M14X1.5		MF 14x1.5	1,5	100	15	71	11	9	4
		21460T2-M16X1.5	21460TR-M16X1.5	MF 16x1.5	1,5	100	15	58	12	9	4

21460TR: Uncoated rake

C1

HSS-E machine taps

mm


Paradur® STE



- For long-chipping materials

MF
DIN 13

6HX



\leq
 $2,5 \times D_N$

E=1,5-2

40°

36HRC
1200-350
N/mm²

	P	M	K	N	S	H	O
THL	●	●	●	●			

DIN 374	Designation THL	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	2156062-M8X1	MF 8x1	1	90	13	67	6	4,9	8	4
	2156062-M10X1	MF 10x1	1	90	12	67	7	5,5	8	4
	2156062-M12X1.5	MF 12x1.5	1,5	100	13	73	9	7	10	4
	2156062-M14X1.5	MF 14x1.5	1,5	100	15	71	11	9	12	5
	2156062-M16X1.5	MF 16x1.5	1,5	100	15	58	12	9	12	5
	2156062-M18X1.5	MF 18x1.5	1,5	110	17	66	14	11	14	5

C1

HSS-E (-PM) machine taps

TC142 Supreme



- WY80FC: Best chip control
- WW60RB: Best wear resistance

≤
3×DN

C=2-3

50°

36HRC
1200-350
N/mm²

MF
DIN 13

6HX

	P	M	K	N	S	H	O
WW60RB	●	●●					

DIN 374	Designation WW60RB	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC142-M8X1-L0-	MF 8x1	1	90	12	67	6	4,9	8	3
	TC142-M10X1-L0-	MF 10x1	1	90	12	67	7	5,5	8	3
	TC142-M12X1-L0-	MF 12x1	1	100	13	73	9	7	10	4
	TC142-M10X1.25-L0-	MF 10x1.25	1,25	100	15	77	7	5,5	8	3
	TC142-M12X1.25-L0-	MF 12x1.25	1,25	100	13	73	9	7	10	4
	TC142-M12X1.5-L0-	MF 12x1.5	1,5	100	13	73	9	7	10	4
	TC142-M14X1.5-L0-	MF 14x1.5	1,5	100	15	71	11	9	12	4
	TC142-M16X1.5-L0-	MF 16x1.5	1,5	100	15	58	12	9	12	4
	TC142-M20X1.5-L0-	MF 20x1.5	1,5	125	17	80	16	12	15	4

Ordering example for the grade WW60RB: TC142-M10X1-L0-WW60RB

C1


HSS-E machine taps

mm

Paradur® X-pert M



– For long-chipping materials



	P	M	K	N	S	H	O
VAP	●	●●	■	■	■	■	■
TIN	●	●●	■	■	■	■	■

DIN 371	Designation TIN	Designation VAP	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_2 mm	l_9 mm	N
	M2151305-M4X0.5	M21513-M4X0.5	MF 4x0.5	0,5	63	7	21	4,5	3,4	6	3
	M2151305-M5X0.5	M21513-M5X0.5	MF 5x0.5	0,5	70	8	25	6	4,9	8	3
	M2151305-M6X0.5	M21513-M6X0.5	MF 6x0.5	0,5	80	10	30	6	4,9	8	3
		M21513-M6X0.75	MF 6x0.75	0,75	80	10	30	6	4,9	8	3

DIN 374	Designation TIN	Designation VAP	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_2 mm	l_9 mm	N
	M2156305-M8X0.5	M21563-M8X0.5	MF 8x0.5	0,5	80	10	57	6	4,9	8	3
	M2156305-M8X0.75	M21563-M8X0.75	MF 8x0.75	0,75	80	10	57	6	4,9	8	3
	M2156305-M10X0.75	M21563-M10X0.75	MF 10x0.75	0,75	90	12	67	7	5,5	8	3
	M2156305-M8X1	M21563-M8X1	MF 8x1	1	90	12	67	6	4,9	8	3
	M2156305-M10X1	M21563-M10X1	MF 10x1	1	90	12	67	7	5,5	8	3
	M2156305-M12X1	M21563-M12X1	MF 12x1	1	100	13	73	9	7	10	4
		M21563-M14X1	MF 14x1	1	100	15	71	11	9	12	4
	M2156305-M10X1.25	M21563-M10X1.25	MF 10x1.25	1,25	100	15	77	7	5,5	8	3
	M2156305-M12X1.25	M21563-M12X1.25	MF 12x1.25	1,25	100	13	73	9	7	10	4
	M2156305-M12X1.5	M21563-M12X1.5	MF 12x1.5	1,5	100	13	73	9	7	10	4
	M2156305-M14X1.5	M21563-M14X1.5	MF 14x1.5	1,5	100	15	71	11	9	12	4
	M2156305-M16X1.5	M21563-M16X1.5	MF 16x1.5	1,5	100	15	58	12	9	12	4
	M2156305-M18X1.5	M21563-M18X1.5	MF 18x1.5	1,5	110	17	66	14	11	14	4
	M2156305-M20X1.5	M21563-M20X1.5	MF 20x1.5	1,5	125	17	80	16	12	15	4
		M21563-M22X1.5	MF 22x1.5	1,5	125	18	78	18	14,5	17	5
		M21563-M24X1.5	MF 24x1.5	1,5	140	20	93	18	14,5	17	5
		M21563-M27X1.5	MF 27x1.5	1,5	140	20	77	20	16	19	5
		M21563-M20X2	MF 20x2	2	140	25	95	16	12	15	4
		M21563-M24X2	MF 24x2	2	140	20	93	18	14,5	17	5
		M21563-M27X2	MF 27x2	2	140	20	77	20	16	19	5
	M21563-M30X2	MF 30x2	2	150	20	85	22	18	21	5	

C1


HSS-E machine taps

mm

Paradur® X-pert M



– For long-chipping materials



	P	M	K	N	S	H	O
TIN	●	●●					

DIN 374	Designation TIN	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	□	l_g mm	N
	M2158305-M8X1	MF 8x1	1	90	12	67	6	4,9	8	3
	M2158305-M10X1	MF 10x1	1	90	12	67	7	5,5	8	3
	M2158305-M12X1	MF 12x1	1	100	13	73	9	7	10	4
	M2158305-M14X1	MF 14x1	1	100	15	71	11	9	12	4
	M2158305-M16X1	MF 16x1	1	100	15	58	12	9	12	4
	M2158305-M12X1.5	MF 12x1.5	1,5	100	13	73	9	7	10	4
	M2158305-M14X1.5	MF 14x1.5	1,5	100	15	71	11	9	12	4
	M2158305-M16X1.5	MF 16x1.5	1,5	100	15	58	12	9	12	4

C1



HSS-E machine taps

mm

Paradur Inox® 25



– For long-chipping materials



DIN 374	Designation TIN	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	□	l_g mm	N
	2156315-M10X1	MF 10x1	1	90	20	67	7	5,5	8	5
	2156315-M12X1	MF 12x1	1	100	21	73	9	7	10	5
	2156315-M12X1.5	MF 12x1.5	1,5	100	21	73	9	7	10	5
	2156315-M14X1.5	MF 14x1.5	1,5	100	21	71	11	9	12	5
	2156315-M16X1.5	MF 16x1.5	1,5	100	21	58	12	9	12	5
	2156315-M18X1.5	MF 18x1.5	1,5	110	24	66	14	11	14	5
	2156315-M20X1.5	MF 20x1.5	1,5	125	24	80	16	12	15	6
	2156315-M22X1.5	MF 22x1.5	1,5	125	24	78	18	14,5	17	6
	2156315-M24X1.5	MF 24x1.5	1,5	140	26	93	18	14,5	17	6

C1

HSS-E PM machine taps

mm

Paradur® Eco CI



- For short-chipping materials
- Nitrided

$\leq 3 \times D_N$

$C=2-3$

32HRC
 1000
 -100
 N/mm²

MF
 DIN 13

6HX

	P	M	K	N	S	H	O
NiD							
TiCN							

DIN 374	Designation	Designation	D _N	P	l ₁	L _c	l ₃	d ₁ h9	□	l _g	N
	NiD	TiCN									
		E2136406-M6X0.75	MF 6x0.75	0,75	80	15	59	4,5	3,4	6	4
	E21364-M8X0.75	E2136406-M8X0.75	MF 8x0.75	0,75	80	15	57	6	4,9	8	4
	E21364-M8X1	E2136406-M8X1	MF 8x1	1	90	18	67	6	4,9	8	4
	E21364-M10X1	E2136406-M10X1	MF 10x1	1	90	20	67	7	5,5	8	4
	E21364-M12X1	E2136406-M12X1	MF 12x1	1	100	21	73	9	7	10	4
	E21364-M10X1.25	E2136406-M10X1.25	MF 10x1.25	1,25	100	20	77	7	5,5	8	4
	E21364-M12X1.25	E2136406-M12X1.25	MF 12x1.25	1,25	100	21	73	9	7	10	4
	E21364-M12X1.5	E2136406-M12X1.5	MF 12x1.5	1,5	100	21	73	9	7	10	4
	E21364-M14X1.5	E2136406-M14X1.5	MF 14x1.5	1,5	100	21	71	11	9	12	4
	E21364-M16X1.5	E2136406-M16X1.5	MF 16x1.5	1,5	100	21	58	12	9	12	4
	E21364-M18X1.5	E2136406-M18X1.5	MF 18x1.5	1,5	110	24	66	14	11	14	4
	E21364-M20X1.5	E2136406-M20X1.5	MF 20x1.5	1,5	125	24	80	16	12	15	4
	E21364-M22X1.5	E2136406-M22X1.5	MF 22x1.5	1,5	125	24	78	18	14,5	17	5
	E21364-M24X1.5	E2136406-M24X1.5	MF 24x1.5	1,5	140	26	93	18	14,5	17	5
	E21364-M26X1.5	E2136406-M26X1.5	MF 26x1.5	1,5	140	26	93	18	14,5	17	5
	E21364-M30X1.5	E2136406-M30X1.5	MF 30x1.5	1,5	150	26	85	22	18	21	5

C1


HSS-E PM machine taps

mm

Paradur® Eco CI



- For short-chipping materials
- Nitrided



DIN 374		Designation TICN	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N
	E2136466-M8X1	MF 8x1	1	90	18	67	6	4,9	8	4
	E2136466-M10X1	MF 10x1	1	90	20	67	7	5,5	8	4
	E2136466-M12X1	MF 12x1	1	100	21	73	9	7	10	4
	E2136466-M12X1.5	MF 12x1.5	1,5	100	21	73	9	7	10	4
	E2136466-M14X1.5	MF 14x1.5	1,5	100	21	71	11	9	12	4
	E2136466-M16X1.5	MF 16x1.5	1,5	100	21	58	12	9	12	4
	E2136466-M18X1.5	MF 18x1.5	1,5	110	24	66	14	11	14	4
	E2136466-M20X1.5	MF 20x1.5	1,5	125	24	80	16	12	15	4
	E2136466-M22X1.5	MF 22x1.5	1,5	125	24	78	18	14,5	17	5

C1

HSS-E PM machine taps

mm

Paradur® Eco CI



- For short-chipping materials
- Nitrided

≤
3×DN

C=2-3

32HRC
 1000
 -100
 N/mm²

MF
DIN 13

6HX

TICN	P	M	K	N	S	H	O
			●●	●●			●●

DIN 374	Designation TICN	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	E2136416-M8X1	MF 8x1	1	90	18	67	6	4,9	8	4
	E2136416-M10X1	MF 10x1	1	90	20	67	7	5,5	8	4
	E2136416-M12X1	MF 12x1	1	100	21	73	9	7	10	4
	E2136416-M12X1.5	MF 12x1.5	1,5	100	21	73	9	7	10	4
	E2136416-M14X1.5	MF 14x1.5	1,5	100	21	71	11	9	12	4
	E2136416-M16X1.5	MF 16x1.5	1,5	100	21	58	12	9	12	4
	E2136416-M18X1.5	MF 18x1.5	1,5	110	24	66	14	11	14	4
	E2136416-M20X1.5	MF 20x1.5	1,5	125	24	80	16	12	15	4
	E2136416-M22X1.5	MF 22x1.5	1,5	125	24	78	18	14,5	17	5

C1


HSS-E machine taps

mm

Paradur® X-pert N



- For long-chipping materials



	P	M	K	N	S	H	O
uncoated				●	●		●

DIN 374	Designation unbeschichtet	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	□	l_g mm	N
	N21566-M8X1	MF 8x1	1	90	12	67	6	4,9	8	2
	N21566-M10X1	MF 10x1	1	90	12	67	7	5,5	8	3
	N21566-M12X1	MF 12x1	1	100	13	73	9	7	10	3
	N21566-M16X1	MF 16x1	1	100	15	58	12	9	12	4
	N21566-M12X1.5	MF 12x1.5	1,5	100	13	73	9	7	10	3
	N21566-M14X1.5	MF 14x1.5	1,5	100	15	71	11	9	12	3
	N21566-M16X1.5	MF 16x1.5	1,5	100	15	58	12	9	12	3
	N21566-M18X1.5	MF 18x1.5	1,5	110	17	66	14	11	14	4
	N21566-M20X1.5	MF 20x1.5	1,5	125	17	80	16	12	15	4

C1

HSS-E PM machine taps

mm

Paradur® Ni 10



- For long- and short-chipping materials

MF
DIN 13

6HX

$\leq 1,5 \times D_N$

$C=2-3$

$\angle 10^\circ$

49HRC
1600
-1000
N/mm²

	P	M	K	N	S	H	O
uncoated	●●			●	●●		

~DIN 371	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	214101-M8X1	MF 8x1	1	90	20	66	8	6,2	9	3
	214101-M10X1	MF 10x1	1	90	24	62	10	8	11	3
	214101-M10X1.25	MF 10x1.25	1,25	100	24,5	72	10	8	11	3
	214101-M12X1.25	MF 12x1.25	1,25	100	28,5	58	12	9	12	4
	214101-M12X1.5	MF 12x1.5	1,5	100	29,5	58	12	9	12	4

C1


HSS-E PM machine taps

mm

Paradur® Ti



- Recommended with oil
- For long-chipping materials



	P	M	K	N	S	H	O
uncoated	●●	●	●	●	●●	●	●

~DIN 371	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	21416-M8X0.75	MF 8x0.75	0,75	80	10	29	8	6,2	9	3
	21416-M8X1	MF 8x1	1	90	12	29	8	6,2	9	3
	21416-M10X1	MF 10x1	1	90	14	33	10	8	11	3

DIN 374	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	21466-M8X1	MF 8x1	1	90	12	67	6	4,9	8	3
	21466-M10X1	MF 10x1	1	90	14	67	7	5,5	8	3
	21466-M12X1	MF 12x1	1	100	16	73	9	7	10	4
	21466-M14X1	MF 14x1	1	100	16	71	11	9	12	4
	21466-M16X1	MF 16x1	1	100	18	58	12	9	12	4
	21466-M10X1.25	MF 10x1.25	1,25	100	20	77	7	5,5	8	3
	21466-M12X1.25	MF 12x1.25	1,25	100	21	73	9	7	10	4
	21466-M12X1.5	MF 12x1.5	1,5	100	21	73	9	7	10	4
	21466-M14X1.5	MF 14x1.5	1,5	100	21	71	11	9	12	4

C1

HSS-E PM machine taps

mm

Paradur® Ti Plus



- Recommended with emulsion
- For long-chipping materials

≤
2×DN

C=2-3

44HRC
 1400
 -700
 N/mm²

MF
DIN 13

6HX

ACN

P	M	K	N	S	H	O
---	---	---	---	---	---	---

~DIN 371	Designation ACN	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm		l _g mm	N
	2141663-M6X0.75	MF 6x0.75	0,75	80	15	23	6	4,9	8	3
	2141663-M8X0.75	MF 8x0.75	0,75	90	18	29,5	8	6,2	9	3
	2141663-M8X1	MF 8x1	1	90	18	29,5	8	6,2	9	3
	2141663-M10X1	MF 10x1	1	100	20	33,5	10	8	11	3

DIN 374	Designation ACN	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm		l _g mm	N
	2146663-M12X1.5	MF 12x1.5	1,5	100	21	73	9	7	10	4
	2146663-M14X1.5	MF 14x1.5	1,5	100	21	71	11	9	12	4

C1



HSS-E machine taps

mm

Paradur® Uni



– For long-chipping materials



DIN 374	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	7156770-M4X0.5	MF 4x0.5	0,5	63	7	43	2,8	2,1	5	3
	7156770-M5X0.5	MF 5x0.5	0,5	70	8	49	3,5	2,7	6	3
	7156770-M6X0.5	MF 6x0.5	0,5	80	10	59	4,5	3,4	6	3
	7156770-M6X0.75	MF 6x0.75	0,75	80	10	59	4,5	3,4	6	3
	7156770-M8X0.75	MF 8x0.75	0,75	80	10	57	6	4,9	8	3
	7156770-M8X1	MF 8x1	1	90	12	67	6	4,9	8	3
	7156770-M10X1	MF 10x1	1	90	12	67	7	5,5	8	3
	7156770-M12X1	MF 12x1	1	100	13	73	9	7	10	4
	7156770-M10X1.25	MF 10x1.25	1,25	100	15	77	7	5,5	8	3
	7156770-M12X1.25	MF 12x1.25	1,25	100	13	73	9	7	10	4
	7156770-M12X1.5	MF 12x1.5	1,5	100	13	73	9	7	10	4
	7156770-M14X1.5	MF 14x1.5	1,5	100	15	71	11	9	12	4
	7156770-M16X1.5	MF 16x1.5	1,5	100	15	58	12	9	12	5
	7156770-M18X1.5	MF 18x1.5	1,5	110	17	66	14	11	14	5
	7156770-M20X1.5	MF 20x1.5	1,5	125	17	80	16	12	15	5
	7156770-M22X1.5	MF 22x1.5	1,5	125	18	78	18	14,5	17	5
	7156770-M24X1.5	MF 24x1.5	1,5	140	20	93	18	14,5	17	5
	7156770-M26X1.5	MF 26x1.5	1,5	140	20	93	18	14,5	17	5
	7156770-M27X1.5	MF 27x1.5	1,5	140	20	77	20	16	19	5
	7156770-M28X1.5	MF 28x1.5	1,5	140	20	77	20	16	19	5
7156770-M30X1.5	MF 30x1.5	1,5	150	20	85	22	18	21	5	
7156770-M27X2	MF 27x2	2	140	20	77	20	16	19	5	
7156770-M30X2	MF 30x2	2	150	20	85	22	18	21	5	

C1

HSS-E PM machine taps

mm

Prototex® Eco Plus



- For long-chipping materials

$\leq 3,5 \times D_N$

$B=3,5-5$

42HRC
 1350
 -500
 N/mm²

UNC
 ASME B1.1

2B

THL	P	M	K	N	S	H	O
	●●	●●	●●	●●	■	■	■

DIN 2184-1	Designation THL	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	EP2221302-UNC2	UNC #2-56	2,184	45	7	12	2,8	2,1	5	3
	EP2221302-UNC4	UNC #4-40	2,845	56	9	18	3,5	2,7	6	3
	EP2221302-UNC6	UNC #6-32	3,505	56	11	20	4	3	6	3
	EP2221302-UNC8	UNC #8-32	4,166	63	12	21	4,5	3,4	6	3
	EP2221302-UNC10	UNC #10-24	4,826	70	13	25	6	4,9	8	3
	EP2221302-UNC1/4	UNC 1/4-20	6,35	80	15	30	7	5,5	8	3

DIN 2184-1	Designation THL	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	EP2226302-UNC5/16	UNC 5/16-18	7,938	90	18	67	6	4,9	8	3
	EP2226302-UNC3/8	UNC 3/8-16	9,525	100	20	77	7	5,5	8	3
	EP2226302-UNC1/2	UNC 1/2-13	12,7	110	23	83	9	7	10	4
	EP2226302-UNC5/8	UNC 5/8-11	15,875	110	25	68	12	9	12	4

C1

HSS-E machine taps

TC216 Perform mm



- For long-chipping materials

UNC
ASME B1.1

2B

$\leq 3 \times D_N$

$B=3,5-5$

\square 32HRC
1000-350
N/mm²

	P	M	K	N	S	H	O
WY80AA	●	●	●	●	●	●	●

DIN 371	Designation WY80AA	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC216-UNC6-C0-	UNC #6-32	3,505	56	11	20	4	3	6	3
	TC216-UNC8-C0-	UNC #8-32	4,166	63	12	21	4,5	3,4	6	3
	TC216-UNC10-C0-	UNC #10-24	4,826	70	13	25	6	4,9	8	3
	TC216-UNC1/4-C0-	UNC 1/4-20	6,35	80	15	30	7	5,5	8	3
	TC216-UNC5/16-C0-	UNC 5/16-18	7,938	90	18	35	8	6,2	9	3
	TC216-UNC3/8-C0-	UNC 3/8-16	9,525	100	20	39	10	8	11	3

Ordering example for the grade WY80AA: TC216-UNC1/4-C0-WY80AA

DIN 376	Designation WY80AA	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC216-UNC1/2-L0-	UNC 1/2-13	12,7	110	23	83	9	7	10	4
	TC216-UNC5/8-L0-	UNC 5/8-11	15,875	110	25	68	12	9	12	4
	TC216-UNC3/4-L0-	UNC 3/4-10	19,05	125	30	81	14	11	14	4

Ordering example for the grade WY80AA: TC216-UNC1/2-L0-WY80AA

C1

HSS-E machine taps

mm

Prototex® X-pert P



- For long-chipping materials

$\leq 3 \times D_N$

$B=3,5-5$

32HRC
 1000
 -200
 N/mm²

UNC
 ASME B1.1

3B

	P	M	K	N	S	H	O
uncoated	●●			●			●

DIN 2184-1-B	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	P22200-UNC2	UNC #2-56	2,184	45	7	12	2,8	2,1	5	2
	P22200-UNC4	UNC #4-40	2,845	56	9	18	3,5	2,7	6	2
	P22200-UNC6	UNC #6-32	3,505	56	11	20	4	3	6	2
	P22200-UNC8	UNC #8-32	4,166	63	12	21	4,5	3,4	6	2

C1

HSS-E machine taps

mm

Prototex® X-pert P



- For long-chipping materials


$\leq 3 \times D_N$

$B=3,5-5$

32HRC
 $1000-200$
 N/mm^2


UNC
ASME B1.1

2B



	P	M	K	N	S	H	O
uncoated	●	●	●	●	●	●	●

DIN 2184-1

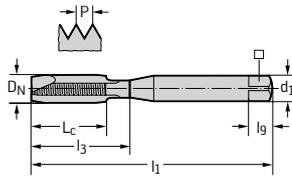

Designation unbeschichtet	D_N -P	D_N mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N
P22210-UNC2	UNC #2-56	2,184	45	7	12	2,8	2,1	2
P22210-UNC4	UNC #4-40	2,845	56	9	18	3,5	2,7	2
P22210-UNC6	UNC #6-32	3,505	56	11	20	4	3	2
P22210-UNC8	UNC #8-32	4,166	63	12	21	4,5	3,4	2

HSS-E machine taps

mm

Prototex® X-pert P



- For long-chipping materials

$\leq 3 \times D_N$

$B=3,5-5$


32HRC
 1000
 -200
 N/mm²

UNC
 ASME B1.1

2B


	P	M	K	N	S	H	O
uncoated	●●			●			●
TIN	●●			●			●

DIN 2184-1

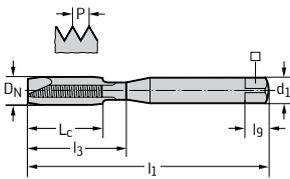

Designation TIN	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l ₉ mm	N
	P22310-UNC2	UNC #2-56	2,184	45	7	12	2,8	2,1	5	3
	P22310-UNC4	UNC #4-40	2,845	56	9	18	3,5	2,7	6	3
	P22310-UNC5	UNC #5-40	3,175	56	10	18	3,5	2,7	6	3
P2231005-UNC6	P22310-UNC6	UNC #6-32	3,505	56	11	20	4	3	6	3
	P22310-UNC8	UNC #8-32	4,166	63	12	21	4,5	3,4	6	3
	P22310-UNC10	UNC #10-24	4,826	70	13	25	6	4,9	8	3
	P22310-UNC12	UNC #12-24	5,486	80	15	30	6	4,9	8	3
	P22310-UNC1/4	UNC 1/4-20	6,35	80	15	30	7	5,5	8	3
	P22310-UNC5/16	UNC 5/16-18	7,938	90	18	35	8	6,2	9	3
	P22310-UNC3/8	UNC 3/8-16	9,525	100	20	39	10	8	11	3

DIN 2184-1

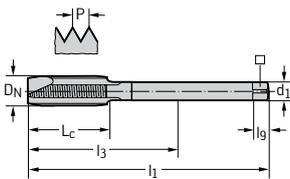

Designation TIN	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l ₉ mm	N
	P22360-UNC7/16	UNC 7/16-14	11,113	100	20	76	8	6,2	9	3
P2236005-UNC1/2	P22360-UNC1/2	UNC 1/2-13	12,7	110	23	83	9	7	10	3
	P22360-UNC9/16	UNC 9/16-12	14,288	110	25	81	11	9	12	3
P2236005-UNC5/8	P22360-UNC5/8	UNC 5/8-11	15,875	110	25	68	12	9	12	3
P2236005-UNC3/4	P22360-UNC3/4	UNC 3/4-10	19,05	125	30	81	14	11	14	3
	P22360-UNC7/8	UNC 7/8-9	22,225	140	30	93	18	14,5	17	3
	P22360-UNC1	UNC 1"-8	25,4	160	36	113	18	14,5	17	3
	P22360-UNC1.1/4	UNC 1.1/4-7	31,75	180	42	115	22	18	21	4
	P22360-UNC1.1/8	UNC 1.1/8-7	28,575	180	42	115	22	18	21	4
	P22360-UNC1.1/2	UNC 1.1/2-6	38,1	200	48	131	28	22	25	4

C1



HSS-E machine taps

mm

Prototex® X-pert M




– For long-chipping materials

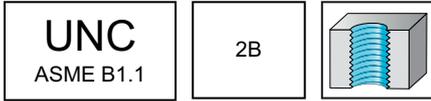


	P	M	K	N	S	H	O
VAP	●	●●	●	●	●	●	●
TIN	●	●●	●	●	●	●	●

DIN 2184-1

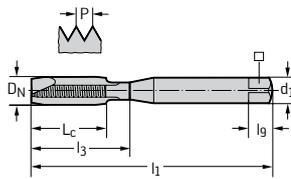

Designation TIN	Designation VAP	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
M2221305-UNC2	M22213-UNC2	UNC #2-56	2,184	45	7	12	2,8	2,1	5	2
M2221305-UNC3	M22213-UNC3	UNC #3-48	2,515	50	8	12,5	2,8	2,1	5	2
M2221305-UNC4	M22213-UNC4	UNC #4-40	2,845	56	9	18	3,5	2,7	6	2
M2221305-UNC5	M22213-UNC5	UNC #5-40	3,175	56	10	18	3,5	2,7	6	2
M2221305-UNC6	M22213-UNC6	UNC #6-32	3,505	56	11	20	4	3	6	2
M2221305-UNC8	M22213-UNC8	UNC #8-32	4,166	63	12	21	4,5	3,4	6	3
M2221305-UNC10	M22213-UNC10	UNC #10-24	4,826	70	13	25	6	4,9	8	3
	M22213-UNC12	UNC #12-24	5,486	80	15	30	6	4,9	8	3
M2221305-UNC1/4	M22213-UNC1/4	UNC 1/4-20	6,35	80	15	30	7	5,5	8	3

DIN 2184-1

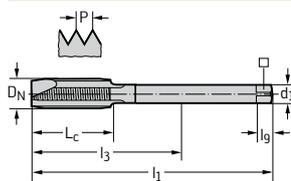

Designation TIN	Designation VAP	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	M22263-UNC5/16	UNC 5/16-18	7,938	90	18	67	6	4,9	8	3
M2226305-UNC3/8	M22263-UNC3/8	UNC 3/8-16	9,525	100	20	77	7	5,5	8	3
	M22263-UNC7/16	UNC 7/16-14	11,113	100	20	76	8	6,2	9	3
M2226305-UNC1/2	M22263-UNC1/2	UNC 1/2-13	12,7	110	23	83	9	7	10	4
	M22263-UNC9/16	UNC 9/16-12	14,288	110	25	81	11	9	12	4
	M22263-UNC5/8	UNC 5/8-11	15,875	110	25	68	12	9	12	4
	M22263-UNC3/4	UNC 3/4-10	19,05	125	30	81	14	11	14	4
	M22263-UNC7/8	UNC 7/8-9	22,225	140	30	93	18	14,5	17	4
	M22263-UNC1	UNC 1"-8	25,4	160	36	113	18	14,5	17	4

C1

HSS-E PM machine taps

mm

Prototex® TiNi



- Recommended with oil
- For long-chipping materials

$\leq 2 \times D_N$

UNC

ASME B1.1

3B

	P	M	K	N	S	H	O
uncoated	●	●	●	●	●	●	●
TiCN	●	●	●	●	●	●	●

~DIN 2184-1	Designation TiCN	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	2220706-UNC2	22207-UNC2	UNC #2-56	2,184	45	9	9	2,8	2,1	5	2
	22207-UNC4	22207-UNC4	UNC #4-40	2,845	56	10	10	3,5	2,7	6	2
	22207-UNC5	22207-UNC5	UNC #5-40	3,175	56	10	10	3,5	2,7	6	2
	2220706-UNC6	22207-UNC6	UNC #6-32	3,505	56	12	12	4	3	6	3
	2220706-UNC8	22207-UNC8	UNC #8-32	4,166	63	13	13	4,5	3,4	6	3
	2220706-UNC10	22207-UNC10	UNC #10-24	4,826	70	16	16	6	4,9	8	3
	2220706-UNC1/4	22207-UNC1/4	UNC 1/4-20	6,35	80	15	25	7	5,5	8	3
	2220706-UNC5/16	22207-UNC5/16	UNC 5/16-18	7,938	90	18	29,5	8	6,2	9	3
	2220706-UNC3/8	22207-UNC3/8	UNC 3/8-16	9,525	100	20	33,5	10	8	11	3

≤ UNC 10: Without reduced neck after the thread

DIN 2184-1	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	22257-UNC7/16	UNC 7/16-14	11,113	100	20	76	8	6,2	9	4
	22257-UNC1/2	UNC 1/2-13	12,7	110	23	83	9	7	10	4
	22257-UNC5/8	UNC 5/8-11	15,875	110	25	68	12	9	12	4
	22257-UNC3/4	UNC 3/4-10	19,05	125	30	81	14	11	14	4

C1

HSS-E PM machine taps

mm

Prototex® TiNi



- Recommended with oil
- For long-chipping materials

$\leq 2 \times D_N$

$B=3,5-5$

44HRC
 1400
 ~700
 N/mm²

UNC
 ASME B1.1

2B

	P	M	K	N	S	H	O
uncoated	●●	●●	●●	●●	●●	●●	●●
TICN	●●	●●	●●	●●	●●	●●	●●

~DIN 2184-1	Designation	Designation	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l ₉ mm	N
	TICN	unbeschichtet									
	2221706-UNC2	22217-UNC2	UNC #2-56	2,184	45	9	9	2,8	2,1	5	2
	2221706-UNC4	22217-UNC4	UNC #4-40	2,845	56	10	10	3,5	2,7	6	2
	2221706-UNC5	22217-UNC5	UNC #5-40	3,175	56	10	10	3,5	2,7	6	2
	2221706-UNC6	22217-UNC6	UNC #6-32	3,505	56	12	12	4	3	6	3
	2221706-UNC8	22217-UNC8	UNC #8-32	4,166	63	13	13	4,5	3,4	6	3
	2221706-UNC10	22217-UNC10	UNC #10-24	4,826	70	16	16	6	4,9	8	3
	2221706-UNC1/4	22217-UNC1/4	UNC 1/4-20	6,35	80	15	25	7	5,5	8	3
	2221706-UNC5/16	22217-UNC5/16	UNC 5/16-18	7,938	90	18	29,5	8	6,2	9	3
	2221706-UNC3/8	22217-UNC3/8	UNC 3/8-16	9,525	100	20	33,5	10	8	11	3

≤ UNC 10: Without reduced neck after the thread

DIN 2184-1	Designation	Designation	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l ₉ mm	N
	TICN	unbeschichtet									
	2226706-UNC7/16	22267-UNC7/16	UNC 7/16-14	11,113	100	20	76	8	6,2	9	4
	2226706-UNC1/2	22267-UNC1/2	UNC 1/2-13	12,7	110	23	83	9	7	10	4
	2226706-UNC9/16	22267-UNC9/16	UNC 9/16-12	14,288	110	25	81	11	9	12	4
	2226706-UNC5/8	22267-UNC5/8	UNC 5/8-11	15,875	110	25	68	12	9	12	4
	2226706-UNC3/4	22267-UNC3/4	UNC 3/4-10	19,05	125	30	81	14	11	14	4


HSS-E PM machine taps

mm

Paradur® Eco Plus



– For long-chipping materials



	P	M	K	N	S	H	O
THL	●●	●●	●●	●●			

~DIN 2184-1		Designation THL	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	EP2251302-UNC2	UNC #2-56		2,184	45	4	8,4	2,8	2,1	5	3
	EP2251302-UNC4	UNC #4-40		2,845	56	6	11	3,5	2,7	6	3
	EP2251302-UNC6	UNC #6-32		3,505	56	6,5	13,7	4	3	6	3
	EP2251302-UNC8	UNC #8-32		4,166	63	7	17,8	4,5	3,4	6	3
	EP2251302-UNC10	UNC #10-24		4,826	70	8	20,7	6	4,9	8	3
	EP2251302-UNC1/4	UNC 1/4-20		6,35	80	10	27,3	7	5,5	8	3

UNC 2: Without thread taper

DIN 2184-1		Designation THL	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	EP2256302-UNC5/16	UNC 5/16-18		7,938	90	12	67	6	4,9	8	3
	EP2256302-UNC3/8	UNC 3/8-16		9,525	100	15	77	7	5,5	8	3
	EP2256302-UNC1/2	UNC 1/2-13		12,7	110	18	83	9	7	10	4
	EP2256302-UNC5/8	UNC 5/8-11		15,875	110	20	68	12	9	12	4

C1


HSS-E PM machine taps

mm

Paradur® Eco Plus



- For long-chipping materials



	P	M	K	N	S	H	O
THL	●	●	●	●			

~DIN 2184-1		Designation THL	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	EP2251312- UNC1/4	UNC 1/4-20		6,35	80	10	27,3	7	5,5	8	3

DIN 2184-1		Designation THL	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	EP2256312- UNC5/16	UNC 5/16- 18		7,938	90	12	67	6	4,9	8	3
	EP2256312- UNC3/8	UNC 3/8-16		9,525	100	15	77	7	5,5	8	3
	EP2256312- UNC1/2	UNC 1/2-13		12,7	110	18	83	9	7	10	4
	EP2256312- UNC5/8	UNC 5/8-11		15,875	110	20	68	12	9	12	4
	EP2256312- UNC3/4	UNC 3/4-10		19,05	125	25	81	14	11	14	4

C1

HSS-E machine taps

TC115 Perform mm



– For long-chipping materials

UNC
ASME B1.1

2B

\leq
3×DN

C=2-3

45°

32HRC
1000-350
N/mm²

	P	M	K	N	S	H	O
WY80AA	●	●	●	●			

DIN 371	Designation WY80AA	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC115-UNC6-C0-	UNC #6-32	3,505	56	6,5	20	4	3	6	3
	TC115-UNC8-C0-	UNC #8-32	4,166	63	7	21	4,5	3,4	6	3
	TC115-UNC10-C0-	UNC #10-24	4,826	70	8	25	6	4,9	8	3
	TC115-UNC1/4-C0-	UNC 1/4-20	6,35	80	10	30	7	5,5	8	3
	TC115-UNC5/16-C0-	UNC 5/16-18	7,938	90	12	35	8	6,2	9	3
	TC115-UNC3/8-C0-	UNC 3/8-16	9,525	100	15	39	10	8	11	3

Ordering example for the grade WY80AA: TC115-UNC1/4-C0-WY80AA

DIN 376	Designation WY80AA	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC115-UNC1/2-L0-	UNC 1/2-13	12,7	110	18	83	9	7	10	3
	TC115-UNC5/8-L0-	UNC 5/8-11	15,875	110	20	68	12	9	12	3
	TC115-UNC3/4-L0-	UNC 3/4-10	19,05	125	25	81	14	11	14	4

Ordering example for the grade WY80AA: TC115-UNC1/2-L0-WY80AA

C1

HSS-E machine taps

mm


Paradur® N



- For long-chipping materials

UNC
ASME B1.1

3B



$\leq 1,5 \times D_N$


C=2-3

15°

32HRC
1000-200
N/mm²


	P	M	K	N	S	H	O
uncoated	●●	●●	●●	●●	●●	●●	●●

DIN 2184-1

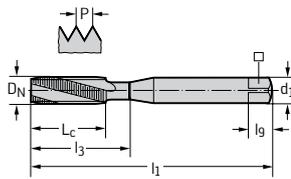

Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
22400-UNC2	UNC #2-56	2,184	45	4	12	2,8	2,1	5	3
22400-UNC4	UNC #4-40	2,845	56	6	18	3,5	2,7	6	3
22400-UNC6	UNC #6-32	3,505	56	6,5	20	4	3	6	3
22400-UNC8	UNC #8-32	4,166	63	7	21	4,5	3,4	6	3
22400-UNC1/4	UNC 1/4-20	6,35	80	10	30	7	5,5	8	3
22400-UNC5/16	UNC 5/16-18	7,938	90	12	35	8	6,2	9	3
22400-UNC3/8	UNC 3/8-16	9,525	100	15	39	10	8	11	3

DIN 2184-1

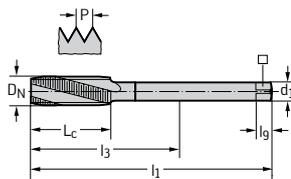

Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
22450-UNC1/2	UNC 1/2-13	12,7	110	18	83	9	7	10	3
22450-UNC5/8	UNC 5/8-11	15,875	110	20	68	12	9	12	3
22450-UNC3/4	UNC 3/4-10	19,05	125	25	81	14	11	14	4

C1


HSS-E machine taps

mm

Paradur® N



– For long-chipping materials



	P	M	K	N	S	H	O
uncoated	●●	●	●●	●●	●	●	●

DIN 2184-1		Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	22410-UNC1	UNC #1-64		1,854	45	4	9	2,8	2,1	5	3
	22410-UNC2	UNC #2-56		2,184	45	4	12	2,8	2,1	5	3
	22410-UNC4	UNC #4-40		2,845	56	6	18	3,5	2,7	6	3
	22410-UNC6	UNC #6-32		3,505	56	6,5	20	4	3	6	3
	22410-UNC8	UNC #8-32		4,166	63	7	21	4,5	3,4	6	3
	22410-UNC10	UNC #10-24		4,826	70	8	25	6	4,9	8	3
	22410-UNC12	UNC #12-24		5,486	80	10	30	6	4,9	8	3
	22410-UNC1/4	UNC 1/4-20		6,35	80	10	30	7	5,5	8	3
	22410-UNC5/16	UNC 5/16-18		7,938	90	12	35	8	6,2	9	3
	22410-UNC3/8	UNC 3/8-16		9,525	100	15	39	10	8	11	3

DIN 2184-1		Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	22460-UNC7/16	UNC 7/16-14		11,113	100	15	76	8	6,2	9	3
	22460-UNC1/2	UNC 1/2-13		12,7	110	18	83	9	7	10	3
	22460-UNC5/8	UNC 5/8-11		15,875	110	20	68	12	9	12	3
	22460-UNC3/4	UNC 3/4-10		19,05	125	25	81	14	11	14	4
	22460-UNC7/8	UNC 7/8-9		22,225	140	25	93	18	14,5	17	4
	22460-UNC1	UNC 1"-8		25,4	160	30	113	18	14,5	17	4

C1


HSS-E machine taps

mm

Paradur® X-pert P



– For long-chipping materials



	P	M	K	N	S	H	O
uncoated	●	●	●	●	●	●	●

DIN 2184-1		Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	P22509-UNC2	UNC #2-56		2,184	45	4	12	2,8	2,1	5	3
	P22509-UNC3	UNC #3-48		2,515	50	4	12,5	2,8	2,1	5	3
	P22509-UNC4	UNC #4-40		2,845	56	6	18	3,5	2,7	6	3
	P22509-UNC6	UNC #6-32		3,505	56	6,5	20	4	3	6	3
	P22509-UNC8	UNC #8-32		4,166	63	7	21	4,5	3,4	6	3
	P22509-UNC10	UNC #10-24		4,826	70	8	25	6	4,9	8	3
	P22509-UNC1/4	UNC 1/4-20		6,35	80	10	30	7	5,5	8	3
	P22509-UNC5/16	UNC 5/16-18		7,938	90	12	35	8	6,2	9	3
	P22509-UNC3/8	UNC 3/8-16		9,525	100	15	39	10	8	11	3

DIN 2184-1		Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	d ₁ h9 mm	□	l _g mm	N
	P22559-UNC5/16	UNC 5/16-18		7,938	90	12	6	4,9	8	3
	P22559-UNC3/8	UNC 3/8-16		9,525	100	15	7	5,5	8	3
	P22559-UNC7/16	UNC 7/16-14		11,113	100	15	8	6,2	9	3
	P22559-UNC1/2	UNC 1/2-13		12,7	110	18	9	7	10	4
	P22559-UNC9/16	UNC 9/16-12		14,288	110	20	11	9	12	4
	P22559-UNC5/8	UNC 5/8-11		15,875	110	20	12	9	12	4
	P22559-UNC3/4	UNC 3/4-10		19,05	125	25	14	11	14	4
	P22559-UNC7/8	UNC 7/8-9		22,225	140	25	18	14,5	17	4
	P22559-UNC1	UNC 1"-8		25,4	160	30	18	14,5	17	4
	P22559-UNC1.1/4	UNC 1.1/4-7		31,75	180	35	22	18	21	4

C1


HSS-E machine taps

mm

Paradur® X-pert P



– For long-chipping materials



	P	M	K	N	S	H	O
uncoated	●●	●	●	●	●	●	●

DIN 2184-1		Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	P22519-UNC2	UNC #2-56		2,184	45	4	12	2,8	2,1	5	3
	P22519-UNC3	UNC #3-48		2,515	50	4	12,5	2,8	2,1	5	3
	P22519-UNC4	UNC #4-40		2,845	56	6	18	3,5	2,7	6	3
	P22519-UNC5	UNC #5-40		3,175	56	6	18	3,5	2,7	6	3
	P22519-UNC6	UNC #6-32		3,505	56	6,5	20	4	3	6	3
	P22519-UNC8	UNC #8-32		4,166	63	7	21	4,5	3,4	6	3
	P22519-UNC10	UNC #10-24		4,826	70	8	25	6	4,9	8	3
	P22519-UNC12	UNC #12-24		5,486	80	10	30	6	4,9	8	3
	P22519-UNC1/4	UNC 1/4-20		6,35	80	10	30	7	5,5	8	3
	P22519-UNC5/16	UNC 5/16-18		7,938	90	12	35	8	6,2	9	3
	P22519-UNC3/8	UNC 3/8-16		9,525	100	15	39	10	8	11	3

DIN 2184-1		Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	P22569-UNC7/16	UNC 7/16-14		11,113	100	15	76	8	6,2	9	3
	P22569-UNC1/2	UNC 1/2-13		12,7	110	18	83	9	7	10	4
	P22569-UNC9/16	UNC 9/16-12		14,288	110	20	81	11	9	12	4
	P22569-UNC5/8	UNC 5/8-11		15,875	110	20	68	12	9	12	4
	P22569-UNC3/4	UNC 3/4-10		19,05	125	25	81	14	11	14	4
	P22569-UNC7/8	UNC 7/8-9		22,225	140	25	93	18	14,5	17	4
	P22569-UNC1	UNC 1"-8		25,4	160	30	113	18	14,5	17	4
	P22569-UNC1.1/8	UNC 1.1/8-7		28,575	180	35	115	22	18	21	4
	P22569-UNC1.1/4	UNC 1.1/4-7		31,75	180	35	115	22	18	21	4
	P22569-UNC1.1/2	UNC 1.1/2-6		38,1	200	40	131	28	22	25	4

C1

HSS-E machine taps

TC130 Supreme



- WY80AA: High Performance



	P	M	K	N	S	H	O
WY80AA	●	●	●	●	●	●	●

DIN 2184-1		Designation WY80AA	D_N -P	D_N mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N
	TC130-UNC1/4-C1	UNC 1/4-20	6,35	80	15	30	7	5,5	8	3
	TC130-UNC5/16-C1-	UNC 5/16-18	7,938	90	18	35	8	6,2	9	3
	TC130-UNC3/8-C1-	UNC 3/8-16	9,525	100	20	39	10	8	11	3

Ordering example for the grade WY80AA: TC130-UNC1/4-C1-WY80AA

DIN 2184-1		Designation WY80AA	D_N -P	D_N mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N
	TC130-UNC1/2-L1-	UNC 1/2-13	12,7	110	23	83	9	7	10	3
	TC130-UNC5/8-L1-	UNC 5/8-11	15,875	110	25	68	12	9	12	3
	TC130-UNC3/4-L1-	UNC 3/4-10	19,05	125	30	81	14	11	14	3
	TC130-UNC1-L1-	UNC 1"-8	25,4	160	36	113	18	14,5	17	4

Ordering example for the grade WY80AA: TC130-UNC1-L1-WY80AA

C1


HSS-E machine taps

mm

Paradur® X-pert M



- For long-chipping materials



	P	M	K	N	S	H	O
VAP	●	●●	●●●	●●●●	●●●●●	●●●●●●	●●●●●●●
TIN	●	●●	●●●	●●●●	●●●●●	●●●●●●	●●●●●●●

DIN 2184-1		Designation TIN	Designation VAP	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	M2251305-UNC2	M22513-UNC2	UNC #2-56	2,184	45	4	12	2,8	2,1	5	3	
	M2251305-UNC3	M22513-UNC3	UNC #3-48	2,515	50	4	12,5	2,8	2,1	5	3	
	M2251305-UNC4	M22513-UNC4	UNC #4-40	2,845	56	6	18	3,5	2,7	6	3	
	M2251305-UNC5	M22513-UNC5	UNC #5-40	3,175	56	6	18	3,5	2,7	6	3	
	M2251305-UNC6	M22513-UNC6	UNC #6-32	3,505	56	6,5	20	4	3	6	3	
	M2251305-UNC8	M22513-UNC8	UNC #8-32	4,166	63	7	21	4,5	3,4	6	3	
	M2251305-UNC10	M22513-UNC10	UNC #10-24	4,826	70	8	25	6	4,9	8	3	
	M2251305-UNC12	M22513-UNC12	UNC #12-24	5,486	80	10	30	6	4,9	8	3	
	M2251305-UNC1/4	M22513-UNC1/4	UNC 1/4-20	6,35	80	10	30	7	5,5	8	3	

UNC 2: Without thread taper

DIN 2184-1		Designation TIN	Designation VAP	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	M2256305-UNC5/16	M22563-UNC5/16	UNC 5/16-18	7,938	90	12	67	6	4,9	8	3	
	M2256305-UNC3/8	M22563-UNC3/8	UNC 3/8-16	9,525	100	15	77	7	5,5	8	3	
	M2256305-UNC7/16	M22563-UNC7/16	UNC 7/16-14	11,113	100	15	76	8	6,2	9	3	
	M2256305-UNC1/2	M22563-UNC1/2	UNC 1/2-13	12,7	110	18	83	9	7	10	4	
	M2256305-UNC9/16	M22563-UNC9/16	UNC 9/16-12	14,288	110	20	81	11	9	12	4	
	M2256305-UNC5/8	M22563-UNC5/8	UNC 5/8-11	15,875	110	20	68	12	9	12	4	
	M2256305-UNC3/4	M22563-UNC3/4	UNC 3/4-10	19,05	125	25	81	14	11	14	4	
	M2256305-UNC7/8	M22563-UNC7/8	UNC 7/8-9	22,225	140	25	93	18	14,5	17	4	
	M2256305-UNC1	M22563-UNC1	UNC 1"-8	25,4	160	30	113	18	14,5	17	4	
		M22563-UNC1.1/8	UNC 1.1/8-7	28,575	180	35	115	22	18	21	5	
		M22563-UNC1.1/4	UNC 1.1/4-7	31,75	180	35	115	22	18	21	5	
		M22563-UNC1.1/2	UNC 1.1/2-6	38,1	200	40	131	28	22	25	5	

C1

HSS-E PM machine taps

mm

Paradur® Eco CI



- For short-chipping materials
- Nitrided

$\leq 3 \times D_N$

$C=2-3$

32HRC
1000-100
N/mm²

UNC
ASME B1.1

2B

NID	P	M	K	N	S	H	O
			●●	●●			●●

DIN 2184-1	Designation NID	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	E22314-UNC6	UNC #6-32	3,505	56	11	20	4	3	6	3
	E22314-UNC8	UNC #8-32	4,166	63	12	21	4,5	3,4	6	3
	E22314-UNC10	UNC #10-24	4,826	70	13	25	6	4,9	8	4
	E22314-UNC1/4	UNC 1/4-20	6,35	80	15	30	7	5,5	8	4

DIN 2184-1	Designation NID	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	E22364-UNC5/16	UNC 5/16-18	7,938	90	18	67	6	4,9	8	4
	E22364-UNC3/8	UNC 3/8-16	9,525	100	20	77	7	5,5	8	4
	E22364-UNC7/16	UNC 7/16-14	11,113	100	20	76	8	6,2	9	4
	E22364-UNC1/2	UNC 1/2-13	12,7	110	23	83	9	7	10	4
	E22364-UNC9/16	UNC 9/16-12	14,288	110	25	81	11	9	12	4
	E22364-UNC5/8	UNC 5/8-11	15,875	110	25	68	12	9	12	4
	E22364-UNC3/4	UNC 3/4-10	19,05	125	30	81	14	11	14	4
	E22364-UNC7/8	UNC 7/8-9	22,225	140	30	93	18	14,5	17	4

C1

HSS-E machine taps

mm

Paradur® X-pert N



- For long-chipping materials

UNC
ASME B1.1

2B

$\leq 3 \times DN$


$C=2-3$

$\angle 35^\circ$

14HRC
700
-200
N/mm²

	P	M	K	N	S	H	O
uncoated				● ●	●		●

DIN 2184-1

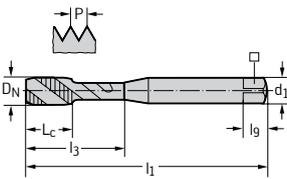

Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
N22516-UNC2	UNC #2-56	2,184	45	4	12	2,8	2,1	5	2
N22516-UNC4	UNC #4-40	2,845	56	6	18	3,5	2,7	6	2
N22516-UNC6	UNC #6-32	3,505	56	6,5	20	4	3	6	2
N22516-UNC8	UNC #8-32	4,166	63	7	21	4,5	3,4	6	2
N22516-UNC10	UNC #10-24	4,826	70	8	25	6	4,9	8	2
N22516-UNC1/4	UNC 1/4-20	6,35	80	10	30	7	5,5	8	2
N22516-UNC5/16	UNC 5/16-18	7,938	90	12	35	8	6,2	9	2
N22516-UNC3/8	UNC 3/8-16	9,525	100	15	39	10	8	11	2

C1



HSS-E PM machine taps

mm

Paradur® Ni



– For long-chipping materials

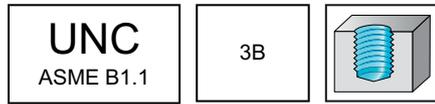

	P	M	K	N	S	H	O
uncoated	●				●●		

~DIN 2184-1	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	224104-UNC2	UNC #2-56	2,184	45	9	9	2,8	2,1	5	3
	224104-UNC4	UNC #4-40	2,845	56	10	10	3,5	2,7	6	3
	224104-UNC6	UNC #6-32	3,505	56	12	12	4	3	6	3
	224104-UNC8	UNC #8-32	4,166	63	13	13	4,5	3,4	6	3
	224104-UNC1/4	UNC 1/4-20	6,35	80	15	25	7	5,5	8	3
	224104-UNC5/16	UNC 5/16-18	7,938	90	18	29,5	8	6,2	9	3
	224104-UNC3/8	UNC 3/8-16	9,525	100	20	33,5	10	8	11	4

≤ UNC 8: Without reduced neck after the thread

DIN 2184-1	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	224604-UNC7/16	UNC 7/16-14	11,113	100	20	76	8	6,2	9	4
	224604-UNC1/2	UNC 1/2-13	12,7	110	23	83	9	7	10	4
	224604-UNC9/16	UNC 9/16-12	14,288	110	25	81	11	9	12	4
	224604-UNC3/4	UNC 3/4-10	19,05	125	30	81	14	11	14	5

C1


HSS-E PM machine taps

mm

Paradur® Ni



- For long-chipping materials



	P	M	K	N	S	H	O
uncoated	●	●	●	●	●	●	●
TICN	●	●	●	●	●	●	●

~DIN 2184-1		Designation TICN	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
			224102-UNC2	UNC #2-56	2,184	45	9	9	2,8	2,1	5	3
			224102-UNC3	UNC #3-48	2,515	50	9	9	2,8	2,1	5	3
		22410206-UNC4	224102-UNC4	UNC #4-40	2,845	56	10	10	3,5	2,7	6	3
		22410206-UNC5		UNC #5-40	3,175	56	10	10	3,5	2,7	6	3
			224102-UNC6	UNC #6-32	3,505	56	12	12	4	3	6	3
		22410206-UNC8	224102-UNC8	UNC #8-32	4,166	63	13	13	4,5	3,4	6	3
		22410206-UNC10	224102-UNC10	UNC #10-24	4,826	70	16	16	6	4,9	8	3
		22410206-UNC1/4	224102-UNC1/4	UNC 1/4-20	6,35	80	15	25	7	5,5	8	3
		22410206-UNC5/16	224102-UNC5/16	UNC 5/16-18	7,938	90	18	29,5	8	6,2	9	3
		22410206-UNC3/8	224102-UNC3/8	UNC 3/8-16	9,525	100	20	33,5	10	8	11	4

≤ UNC 10: Without reduced neck after the thread

DIN 2184-1		Designation TICN	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
			224602-UNC7/16	UNC 7/16-14	11,113	100	20	76	8	6,2	9	4
		22460206-UNC1/2	224602-UNC1/2	UNC 1/2-13	12,7	110	23	83	9	7	10	4
		22460206-UNC5/8	224602-UNC5/8	UNC 5/8-11	15,875	110	25	68	12	9	12	4
		22460206-UNC3/4	224602-UNC3/4	UNC 3/4-10	19,05	125	30	81	14	11	14	5

C1



HSS-E PM machine taps

mm

Paradur® Ti



- Recommended with oil
- For long-chipping materials

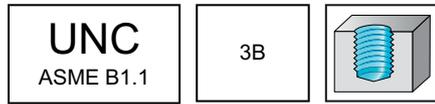

	P	M	K	N	S	H	O
uncoated	●●	●	●	●	●●	●	●

~DIN 2184-1		Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	224164-UNC6	UNC #6-32		3,505	56	12	12	4	3	6	3
	224164-UNC8	UNC #8-32		4,166	63	13	13	4,5	3,4	6	3
	224164-UNC10	UNC #10-24		4,826	70	16	16	6	4,9	8	3
	224164-UNC1/4	UNC 1/4-20		6,35	80	15	25	7	5,5	8	3
	224164-UNC5/16	UNC 5/16-18		7,938	90	18	29,5	8	6,2	9	3
	224164-UNC3/8	UNC 3/8-16		9,525	100	20	33,5	10	8	11	3

≤ UNC 10: Without reduced neck after the thread

DIN 2184-1		Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	224664-UNC7/16	UNC 7/16-14		11,113	100	20	76	8	6,2	9	4
	224664-UNC1/2	UNC 1/2-13		12,7	110	23	83	9	7	10	4

C1

HSS-E PM machine taps

mm

Paradur® Ti



- Recommended with oil
- For long-chipping materials

≤
2×DN

C=2-3

15°

44HRC
1400-700
N/mm²

UNC
ASME B1.1

2B

	P	M	K	N	S	H	O
uncoated	●●			●	●●		

~DIN 2184-1	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	22416-UNC6	UNC #6-32	3,505	56	12	12	4	3	6	3
	22416-UNC8	UNC #8-32	4,166	63	13	13	4,5	3,4	6	3
	22416-UNC10	UNC #10-24	4,826	70	16	16	6	4,9	8	3
	22416-UNC12	UNC #12-24	5,486	80	15	23	6	4,9	8	3
	22416-UNC1/4	UNC 1/4-20	6,35	80	15	25	7	5,5	8	3
	22416-UNC5/16	UNC 5/16-18	7,938	90	18	29,5	8	6,2	9	3
	22416-UNC3/8	UNC 3/8-16	9,525	100	20	33,5	10	8	11	3

≤ UNC 10: Without reduced neck after the thread

DIN 2184-1	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	22466-UNC7/16	UNC 7/16-14	11,113	100	20	76	8	6,2	9	4
	22466-UNC1/2	UNC 1/2-13	12,7	110	23	83	9	7	10	4
	22466-UNC5/8	UNC 5/8-11	15,875	110	25	68	12	9	12	4

C1


HSS-E PM machine taps

mm

Paradur® Ti



- Recommended with oil
- For long-chipping materials



	P	M	K	N	S	H	O
uncoated	●●	●	●	●	●●	●	●

~DIN 2184-1	Designation	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	unbeschichtet									
	22416-UNC6	UNC #6-32	3,505	56	12	12	4	3	6	3
	22416-UNC8	UNC #8-32	4,166	63	13	13	4,5	3,4	6	3
	22416-UNC10	UNC #10-24	4,826	70	16	16	6	4,9	8	3
	22416-UNC12	UNC #12-24	5,486	80	15	23	6	4,9	8	3
	22416-UNC1/4	UNC 1/4-20	6,35	80	15	25	7	5,5	8	3
	22416-UNC5/16	UNC 5/16-18	7,938	90	18	29,5	8	6,2	9	3
	22416-UNC3/8	UNC 3/8-16	9,525	100	20	33,5	10	8	11	3

≤ UNC 10: Without reduced neck after the thread

DIN 2184-1	Designation	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	unbeschichtet									
	22466-UNC7/16	UNC 7/16-14	11,113	100	20	76	8	6,2	9	4
	22466-UNC1/2	UNC 1/2-13	12,7	110	23	83	9	7	10	4
	22466-UNC5/8	UNC 5/8-11	15,875	110	25	68	12	9	12	4

C1

HSS-E PM machine taps

mm

Prototex® Eco Plus



– For long-chipping materials

$\leq 3,5 \times D_N$

$B=3,5-5$

42HRC
 1350
 -500
 N/mm²

UNF
 ASME B1.1

2B

THL	P	M	K	N	S	H	O
-----	---	---	---	---	---	---	---

DIN 2184-1	Designation THL	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm		l _g mm	N
	EP2321302-UNF4	UNF #4-48	2,845	56	9	18	3,5	2,7	6	3
	EP2321302-UNF6	UNF #6-40	3,505	56	11	20	4	3	6	3
	EP2321302-UNF8	UNF #8-36	4,166	63	12	21	4,5	3,4	6	3
	EP2321302-UNF10	UNF #10-32	4,826	70	13	25	6	4,9	8	3
	EP2321302-UNF1/4	UNF 1/4-28	6,35	80	15	30	7	5,5	8	3

DIN 2184-1	Designation THL	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm		l _g mm	N
	EP2326302-UNF5/16	UNF 5/16-24	7,938	90	18	67	6	4,9	8	3
	EP2326302-UNF3/8	UNF 3/8-24	9,525	100	20	77	7	5,5	8	3
	EP2326302-UNF1/2	UNF 1/2-20	12,7	100	21	73	9	7	10	4
	EP2326302-UNF5/8	UNF 5/8-18	15,875	100	21	58	12	9	12	4



C1

HSS-E machine taps

TC216 Perform



- For long-chipping materials

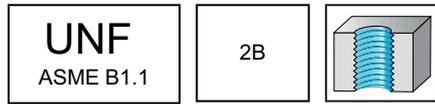

	P	M	K	N	S	H	O
WY80AA	●	●	●	●			

DIN 371	Designation WY80AA	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC216-UNF6-C0-	UNF #6-40	3,505	56	11	20	4	3	6	3
	TC216-UNF10-C0-	UNF #10-32	4,826	70	13	25	6	4,9	8	3
	TC216-UNF1/4-C0-	UNF 1/4-28	6,35	80	15	30	7	5,5	8	3
	TC216-UNF5/16-C0-	UNF 5/16-24	7,938	90	18	35	8	6,2	9	3
	TC216-UNF3/8-C0-	UNF 3/8-24	9,525	100	20	39	10	8	11	3

Ordering example for the grade WY80AA: TC216-UNF1/4-C0-WY80AA

DIN 376	Designation WY80AA	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC216-UNF7/16-L0-	UNF 7/16-20	11,113	100	20	76	8	6,2	9	3
	TC216-UNF1/2-L0-	UNF 1/2-20	12,7	100	21	73	9	7	10	4

Ordering example for the grade WY80AA: TC216-UNF1/2-L0-WY80AA

C1

HSS-E machine taps

mm


Prototex® X-pert P



- For long-chipping materials

UNF
ASME B1.1

3B



$\leq 3 \times D_N$

$B=3,5-5$

32HRC
1000
-200
N/mm²

	P	M	K	N	S	H	O
uncoated	●●			●			●

DIN 2184-1-B		Designation unbeschichtet	D_N mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N	
	P23200-UNF4	UNF #4-48	2,845	56	9	18	3,5	2,7	6	2
	P23200-UNF6	UNF #6-40	3,505	56	11	20	4	3	6	2
	P23200-UNF8	UNF #8-36	4,166	63	12	21	4,5	3,4	6	2
	P23200-UNF10	UNF #10-32	4,826	70	13	25	6	4,9	8	2
	P23200-UNF12	UNF #12-28	5,486	80	15	30	6	4,9	8	3
	P23200-UNF1/4	UNF 1/4-28	6,35	80	15	30	7	5,5	8	3

C1


HSS-E machine taps

mm

Prototex® X-pert P



- For long-chipping materials



	P	M	K	N	S	H	O
uncoated	●●	●	●	●	●	●	●
TIN	●●	●	●	●	●	●	●

DIN 2184-1	Designation TIN	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N	
		P23210-UNF0	UNF #0-80	1,524	40	8	8	2,5	2,1	5	2	
		P23210-UNF1	UNF #1-72	1,854	45	6	9	2,8	2,1	5	2	
		P23210-UNF2	UNF #2-64	2,184	45	7	12	2,8	2,1	5	2	
		P23210-UNF3	UNF #3-56	2,515	50	8	12,5	2,8	2,1	5	2	
		P23210-UNF4	UNF #4-48	2,845	56	9	18	3,5	2,7	6	2	
		P23210-UNF6	UNF #6-40	3,505	56	11	20	4	3	6	2	
		P23210-UNF8	UNF #8-36	4,166	63	12	21	4,5	3,4	6	2	
		P23210-UNF10	UNF #10-32	4,826	70	13	25	6	4,9	8	2	
		P23210-UNF12	UNF #12-28	5,486	80	15	30	6	4,9	8	3	
		P2321005-UNF1/4	P23210-UNF1/4	UNF 1/4-28	6,35	80	15	30	7	5,5	8	3

UNF 0: Without reduced neck after the thread

DIN 2184-1	Designation TIN	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
		P2336005-UNF5/16	UNF 5/16-24	7,938	90	18	67	6	4,9	8	3
		P2336005-UNF3/8	UNF 3/8-24	9,525	100	20	77	7	5,5	8	3
		P2336005-UNF7/16	UNF 7/16-20	11,113	100	20	76	8	6,2	9	3
		P2336005-UNF1/2	UNF 1/2-20	12,7	100	21	73	9	7	10	4
		P2336005-UNF9/16	UNF 9/16-18	14,288	100	21	71	11	9	12	4
		P2336005-UNF5/8	UNF 5/8-18	15,875	100	21	58	12	9	12	4
		P2336005-UNF3/4	UNF 3/4-16	19,05	110	24	66	14	11	14	4
		P2336005-UNF7/8	UNF 7/8-14	22,225	125	24	78	18	14,5	17	4
		P2336005-UNF1	UNF 1"-12	25,4	140	26	93	18	14,5	17	4
		P2336005-UNF1.1/4	UNF 1.1/4-12	31,75	150	26	85	22	18	21	4
		P2336005-UNF1.1/8	UNF 1.1/8-12	28,575	150	26	85	22	18	21	4
		P2336005-UNF1.1/2	UNF 1.1/2-12	38,1	170	28	101	28	22	25	4
	P2336005-UNF1.3/8	UNF 1.3/8-12	34,925	170	28	101	28	22	25	4	

C1

HSS-E machine taps

mm

Prototex® X-pert M



- For long-chipping materials

$\leq 3 \times D_N$

B=3,5-5

36HRC
1200-700 N/mm²

UNF

ASME B1.1

2B

	P	M	K	N	S	H	O
VAP	●	●●	●	●	●	●	●
TIN	●	●●	●	●	●	●	●

DIN 2184-1	Designation TIN	Designation VAP	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N	
		M23213-UNF5	UNF #5-44	3,175	56	10	18	3,5	2,7	6	2	
		M23213-UNF6	UNF #6-40	3,505	56	11	20	4	3	6	2	
		M23213-UNF8	UNF #8-36	4,166	63	12	21	4,5	3,4	6	2	
		M2321305-UNF10	M23213-UNF10	UNF #10-32	4,826	70	13	25	6	4,9	8	3
			M23213-UNF12	UNF #12-28	5,486	80	15	30	6	4,9	8	3
		M2321305-UNF1/4	M23213-UNF1/4	UNF 1/4-28	6,35	80	15	30	7	5,5	8	3

DIN 2184-1	Designation TIN	Designation VAP	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	M2326305-UNF5/16	M23263-UNF5/16	UNF 5/16-24	7,938	90	18	67	6	4,9	8	3
	M2326305-UNF3/8	M23263-UNF3/8	UNF 3/8-24	9,525	100	20	77	7	5,5	8	3
	M2326305-UNF7/16	M23263-UNF7/16	UNF 7/16-20	11,113	100	20	76	8	6,2	9	3
	M2326305-UNF1/2	M23263-UNF1/2	UNF 1/2-20	12,7	100	21	73	9	7	10	4
		M23263-UNF9/16	UNF 9/16-18	14,288	100	21	71	11	9	12	4
		M23263-UNF5/8	UNF 5/8-18	15,875	100	21	58	12	9	12	4
		M23263-UNF3/4	UNF 3/4-16	19,05	110	24	66	14	11	14	4
		M23263-UNF7/8	UNF 7/8-14	22,225	125	24	78	18	14,5	17	4
		M23263-UNF1	UNF 1"-12	25,4	140	26	93	18	14,5	17	4

C1


HSS-E PM machine taps

mm

Prototex® TiNi



- Recommended with oil
- For long-chipping materials



	P	M	K	N	S	H	O
uncoated	●	●	●	●	●	●	●
TiCN	●	●	●	●	●	●	●

~DIN 2184-1		Designation TiCN	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
		23207-UNF4	23207-UNF4	UNF #4-48	2,845	56	10	10	3,5	2,7	6	2
		23207-UNF5	23207-UNF5	UNF #5-44	3,175	56	10	10	3,5	2,7	6	2
		23207-UNF6	23207-UNF6	UNF #6-40	3,505	56	12	12	4	3	6	3
		2320706-UNF10	23207-UNF10	UNF #10-32	4,826	70	16	16	6	4,9	8	3
		2320706-UNF1/4	23207-UNF1/4	UNF 1/4-28	6,35	80	15	25	7	5,5	8	3
		2320706-UNF5/16	23207-UNF5/16	UNF 5/16-24	7,938	90	18	29,5	8	6,2	9	3
		2320706-UNF3/8	23207-UNF3/8	UNF 3/8-24	9,525	100	20	33,5	10	8	11	3

≤ UNF 10: Without reduced neck after the thread

DIN 2184-1		Designation TiCN	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
		2325706-UNF7/16	23257-UNF7/16	UNF 7/16-20	11,113	100	20	76	8	6,2	9	4
		2325706-UNF1/2	23257-UNF1/2	UNF 1/2-20	12,7	100	23	73	9	7	10	4
		2325706-UNF5/8	23257-UNF5/8	UNF 5/8-18	15,875	100	25	58	12	9	12	4

C1

HSS-E PM machine taps

mm

Prototex® TiNi



- Recommended with oil
- For long-chipping materials

$\leq 2 \times D_N$

$B=3,5-5$

44HRC
 1400
 -700
 N/mm²

UNF
 ASME B1.1

2B

	P	M	K	N	S	H	O
uncoated	●	●	●	●	●	●	●
TiCN	●	●	●	●	●	●	●

~DIN 2184-1	Designation	Designation	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N	
	TiCN	unbeschichtet										
	2321706-UNF5	23217-UNF5	UNF #5-44	3,175	56	10	10	3,5	2,7	6	2	
		23217-UNF6	UNF #6-40	3,505	56	12	12	4	3	6	3	
	2321706-UNF10	23217-UNF10	UNF #10-32	4,826	70	16	16	6	4,9	8	3	
		23217-UNF1/4	UNF 1/4-28	6,35	80	15	25	7	5,5	8	3	
		2321706-UNF5/16	23217-UNF5/16	UNF 5/16-24	7,938	90	18	29,5	8	6,2	9	3
		2321706-UNF3/8	23217-UNF3/8	UNF 3/8-24	9,525	100	20	33,5	10	8	11	3

≤ UNF 10: Without reduced neck after the thread

DIN 2184-1	Designation	Designation	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TiCN	unbeschichtet									
	2326706-UNF7/16	23267-UNF7/16	UNF 7/16-20	11,113	100	20	76	8	6,2	9	4
		23267-UNF1/2	UNF 1/2-20	12,7	100	23	73	9	7	10	4
		2326706-UNF5/8	23267-UNF5/8	UNF 5/8-18	15,875	100	25	58	12	9	12

C1


HSS-E PM machine taps

mm

Paradur® Eco Plus



– For long-chipping materials



	P	M	K	N	S	H	O
THL	●	●	●	●			

~DIN 2184-1		Designation THL	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	EP2351302-UNF4	UNF #4-48		2,845	56	6	11	3,5	2,7	6	3
	EP2351302-UNF6	UNF #6-40		3,505	56	6,5	13,1	4	3	6	3
	EP2351302-UNF8	UNF #8-36		4,166	63	7	17,4	4,5	3,4	6	3
	EP2351302-UNF10	UNF #10-32		4,826	70	8	20,7	6	4,9	8	3
	EP2351302-UNF1/4	UNF 1/4-28		6,35	80	10	25,9	7	5,5	8	3

DIN 2184-1		Designation THL	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	EP2356302-UNF5/16	UNF 5/16-24		7,938	90	12	67	6	4,9	8	3
	EP2356302-UNF3/8	UNF 3/8-24		9,525	100	15	77	7	5,5	8	3
	EP2356302-UNF1/2	UNF 1/2-20		12,7	100	13	73	9	7	10	4
	EP2356302-UNF5/8	UNF 5/8-18		15,875	100	15	58	12	9	12	4

C1

HSS-E PM machine taps

mm

Paradur® Eco Plus



– For long-chipping materials

UNF
ASME B1.1

2B

$\leq 3 \times D_N$

$C=2-3$

$\angle 45^\circ$

38HRC
1250
-500
N/mm²

	P	M	K	N	S	H	O
THL	●●	●●	●●	●●	●●	●●	●●

~DIN 2184-1	Designation THL	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	EP2351312-UNF1/4	UNF 1/4-28	6,35	80	10	25,9	7	5,5	8	3

DIN 2184-1	Designation THL	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	EP2356312-UNF5/16	UNF 5/16-24	7,938	90	12	67	6	4,9	8	3
	EP2356312-UNF3/8	UNF 3/8-24	9,525	100	15	77	7	5,5	8	3
	EP2356312-UNF1/2	UNF 1/2-20	12,7	100	13	73	9	7	10	4
	EP2356312-UNF5/8	UNF 5/8-18	15,875	100	15	58	12	9	12	4


C1

HSS-E machine taps

TC115 Perform mm



- For long-chipping materials



	P	M	K	N	S	H	O
WY80AA	●	●	●	●			

DIN 371	Designation WY80AA	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC115-UNF6-C0-	UNF #6-40	3,505	56	6,5	20	4	3	6	3
	TC115-UNF10-C0-	UNF #10-32	4,826	70	8	25	6	4,9	8	3
	TC115-UNF1/4-C0-	UNF 1/4-28	6,35	80	10	30	7	5,5	8	3
	TC115-UNF5/16-C0-	UNF 5/16-24	7,938	90	12	35	8	6,2	9	3
	TC115-UNF3/8-C0-	UNF 3/8-24	9,525	100	15	39	10	8	11	3

Ordering example for the grade WY80AA: TC115-UNF1/4-C0-WY80AA

DIN 376	Designation WY80AA	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC115-UNF7/16-L0-	UNF 7/16-20	11,113	100	15	76	8	6,2	9	3
	TC115-UNF1/2-L0-	UNF 1/2-20	12,7	100	13	73	9	7	10	4

Ordering example for the grade WY80AA: TC115-UNF1/2-L0-WY80AA

C1

HSS-E machine taps

mm

Paradur® N



– For long-chipping materials

UNF
ASME B1.1

3B

$\leq 1,5 \times D_N$

$C=2-3$

$\angle 15^\circ$

32HRC
1000-200
N/mm²

	P	M	K	N	S	H	O
uncoated	●●	●	●●	●●	●	●	●

DIN 2184-1	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	23400-UNF0	UNF #0-80	1,524	40	6	6	2,5	2,1	5	3
	23400-UNF4	UNF #4-48	2,845	56	6	18	3,5	2,7	6	3
	23400-UNF8	UNF #8-36	4,166	63	7	21	4,5	3,4	6	3
	23400-UNF10	UNF #10-32	4,826	70	8	25	6	4,9	8	3
	23400-UNF12	UNF #12-28	5,486	80	10	30	6	4,9	8	3
	23400-UNF1/4	UNF 1/4-28	6,35	80	10	30	7	5,5	8	3
	23400-UNF5/16	UNF 5/16-24	7,938	90	12	35	8	6,2	9	3
	23400-UNF3/8	UNF 3/8-24	9,525	100	15	39	10	8	11	3

UNF 0: Without reduced neck after the thread

DIN 2184-1	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	23450-UNF5/16	UNF 5/16-24	7,938	90	13	67	6	4,9	8	3
	23450-UNF3/8	UNF 3/8-24	9,525	100	15	77	7	5,5	8	3
	23450-UNF7/16	UNF 7/16-20	11,113	100	15	76	8	6,2	9	3
	23450-UNF1/2	UNF 1/2-20	12,7	100	13	73	9	7	10	3
	23450-UNF9/16	UNF 9/16-18	14,288	100	15	71	11	9	12	4
	23450-UNF3/4	UNF 3/4-16	19,05	110	17	66	14	11	14	4
	23450-UNF7/8	UNF 7/8-14	22,225	125	18	78	18	14,5	17	4

C1


HSS-E machine taps

mm

Paradur® N



– For long-chipping materials



	P	M	K	N	S	H	O
uncoated	●●	●	●●	●●	●	●	●

DIN 2184-1	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	23410-UNF0	UNF #0-80	1,524	40	6	6	2,5	2,1	5	3
	23410-UNF1	UNF #1-72	1,854	45	4	9	2,8	2,1	5	3
	23410-UNF2	UNF #2-64	2,184	45	4	12	2,8	2,1	5	3
	23410-UNF4	UNF #4-48	2,845	56	6	18	3,5	2,7	6	3
	23410-UNF8	UNF #8-36	4,166	63	7	21	4,5	3,4	6	3
	23410-UNF10	UNF #10-32	4,826	70	8	25	6	4,9	8	3
	23410-UNF12	UNF #12-28	5,486	80	10	30	6	4,9	8	3
	23410-UNF1/4	UNF 1/4-28	6,35	80	10	30	7	5,5	8	3
	23410-UNF5/16	UNF 5/16-24	7,938	90	12	35	8	6,2	9	3
	23410-UNF3/8	UNF 3/8-24	9,525	100	15	39	10	8	11	3

UNF 0: Without reduced neck after the thread

DIN 2184-1	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	23460-UNF5/16	UNF 5/16-24	7,938	90	13	67	6	4,9	8	3
	23460-UNF3/8	UNF 3/8-24	9,525	100	15	77	7	5,5	8	3
	23460-UNF7/16	UNF 7/16-20	11,113	100	15	76	8	6,2	9	3
	23460-UNF1/2	UNF 1/2-20	12,7	100	13	73	9	7	10	3
	23460-UNF9/16	UNF 9/16-18	14,288	100	15	71	11	9	12	4
	23460-UNF5/8	UNF 5/8-18	15,875	100	15	58	12	9	12	4
	23460-UNF3/4	UNF 3/4-16	19,05	110	17	66	14	11	14	4
	23460-UNF7/8	UNF 7/8-14	22,225	125	18	78	18	14,5	17	4


HSS-E machine taps

mm

Paradur® X-pert P



- For long-chipping materials



	P	M	K	N	S	H	O
uncoated	●●	●	●	●	●	●	●
TIN	●●	●	●	●	●	●	●

DIN 2184-1	Designation TIN	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
		P23519-UNF1	UNF #1-72	1,854	45	4	9	2,8	2,1	5	3
		P23519-UNF2	UNF #2-64	2,184	45	4	12	2,8	2,1	5	3
		P23519-UNF3	UNF #3-56	2,515	50	4	12,5	2,8	2,1	5	3
		P23519-UNF4	UNF #4-48	2,845	56	6	18	3,5	2,7	6	3
		P23519-UNF5	UNF #5-44	3,175	56	6	18	3,5	2,7	6	3
		P23519-UNF6	UNF #6-40	3,505	56	6,5	20	4	3	6	3
		P23519-UNF8	UNF #8-36	4,166	63	7	21	4,5	3,4	6	3
	P2351905-UNF10	P23519-UNF10	UNF #10-32	4,826	70	8	25	6	4,9	8	3
		P23519-UNF12	UNF #12-28	5,486	80	10	30	6	4,9	8	3
	P2351905-UNF1/4	P23519-UNF1/4	UNF 1/4-28	6,35	80	10	30	7	5,5	8	3

DIN 2184-1	Designation TIN	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	P2356905-UNF5/16	P23569-UNF5/16	UNF 5/16-24	7,938	90	12	67	6	4,9	8	3
	P2356905-UNF3/8	P23569-UNF3/8	UNF 3/8-24	9,525	100	15	77	7	5,5	8	3
	P2356905-UNF7/16	P23569-UNF7/16	UNF 7/16-20	11,113	100	15	76	8	6,2	9	3
	P2356905-UNF1/2	P23569-UNF1/2	UNF 1/2-20	12,7	100	13	73	9	7	10	4
	P2356905-UNF9/16	P23569-UNF9/16	UNF 9/16-18	14,288	100	15	71	11	9	12	4
	P2356905-UNF5/8	P23569-UNF5/8	UNF 5/8-18	15,875	100	15	58	12	9	12	4
	P2356905-UNF3/4	P23569-UNF3/4	UNF 3/4-16	19,05	110	17	66	14	11	14	4
	P2356905-UNF7/8	P23569-UNF7/8	UNF 7/8-14	22,225	125	18	78	18	14,5	17	4
		P23569-UNF1	UNF 1"-12	25,4	140	20	93	18	14,5	17	5
		P23569-UNF1.1/8	UNF 1.1/8-12	28,575	150	20	85	22	18	21	5
		P23569-UNF1.1/4	UNF 1.1/4-12	31,75	150	20	85	22	18	21	5
		P23569-UNF1.3/8	UNF 1.3/8-12	34,925	170	22	101	28	22	25	5
		P23569-UNF1.1/2	UNF 1.1/2-12	38,1	170	22	101	28	22	25	5

C1


HSS-E machine taps

mm

Paradur® X-pert M




– For long-chipping materials



	P	M	K	N	S	H	O
VAP	●	●●	●	●	●	●	●
TIN	●	●●	●	●	●	●	●


DIN 2184-1

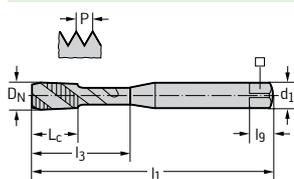

Designation TIN	Designation VAP	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	M23513-UNF6	UNF #6-40	3,505	56	6,5	20	4	3	6	3
M2351305-UNF8	M23513-UNF8	UNF #8-36	4,166	63	7	21	4,5	3,4	6	3
M2351305-UNF10	M23513-UNF10	UNF #10-32	4,826	70	8	25	6	4,9	8	3
M2351305-UNF12	M23513-UNF12	UNF #12-28	5,486	80	10	30	6	4,9	8	3
M2351305-UNF1/4	M23513-UNF1/4	UNF 1/4-28	6,35	80	10	30	7	5,5	8	3

C1

DIN 2184-1

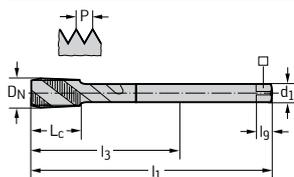

Designation TIN	Designation VAP	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
M2356305-UNF5/16	M23563-UNF5/16	UNF 5/16-24	7,938	90	12	67	6	4,9	8	3
M2356305-UNF3/8	M23563-UNF3/8	UNF 3/8-24	9,525	100	15	77	7	5,5	8	3
M2356305-UNF7/16	M23563-UNF7/16	UNF 7/16-20	11,113	100	15	76	8	6,2	9	3
M2356305-UNF1/2	M23563-UNF1/2	UNF 1/2-20	12,7	100	13	73	9	7	10	4
M2356305-UNF9/16	M23563-UNF9/16	UNF 9/16-18	14,288	100	15	71	11	9	12	4
M2356305-UNF5/8	M23563-UNF5/8	UNF 5/8-18	15,875	100	15	58	12	9	12	4
M2356305-UNF3/4	M23563-UNF3/4	UNF 3/4-16	19,05	110	17	66	14	11	14	4
M2356305-UNF7/8	M23563-UNF7/8	UNF 7/8-14	22,225	125	18	78	18	14,5	17	4
M2356305-UNF1	M23563-UNF1	UNF 1"-12	25,4	140	20	93	18	14,5	17	5

HSS-E PM machine taps

mm

Paradur® Eco CI



- For short-chipping materials
- Nitrided

≤
3×DN

C=2-3

32HRC
1000
-100
N/mm²

UNF
ASME B1.1

2B

NID	P	M	K	N	S	H	O
			●●	●●			●●

DIN 2184-1	Designation NID	DN-P	DN mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	E23314-UNF10	UNF #10-32	4,826	70	13	25	6	4,9	8	4
	E23314-UNF1/4	UNF 1/4-28	6,35	80	15	30	7	5,5	8	4

DIN 2184-1	Designation NID	DN-P	DN mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	E23364-UNF5/16	UNF 5/16-24	7,938	90	18	67	6	4,9	8	4
	E23364-UNF3/8	UNF 3/8-24	9,525	100	20	77	7	5,5	8	4
	E23364-UNF7/16	UNF 7/16-20	11,113	100	20	76	8	6,2	9	4
	E23364-UNF1/2	UNF 1/2-20	12,7	100	21	73	9	7	10	4
	E23364-UNF9/16	UNF 9/16-18	14,288	100	21	71	11	9	12	4
	E23364-UNF5/8	UNF 5/8-18	15,875	100	21	58	12	9	12	4
	E23364-UNF3/4	UNF 3/4-16	19,05	110	24	66	14	11	14	4
	E23364-UNF7/8	UNF 7/8-14	22,225	125	24	78	18	14,5	17	5

C1


HSS-E PM machine taps

mm

Paradur® Ni



– For long-chipping materials



	P	M	K	N	S	H	O
uncoated	●	●	●	●	●	●	●
TICN	●	●	●	●	●	●	●

~DIN 2184-1	Designation TICN	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	23410406-UNF8	234104-UNF8	UNF #8-36	4,166	63	13	42	4,5	3,4	6	3
	23410406-UNF10	234104-UNF10	UNF #10-32	4,826	70	16	16	6	4,9	8	3
		234104-UNF12	UNF #12-28	5,486	80	15	23	6	4,9	8	3
	23410406-UNF1/4	234104-UNF1/4	UNF 1/4-28	6,35	80	15	25	7	5,5	8	3
	23410406-UNF5/16	234104-UNF5/16	UNF 5/16-24	7,938	90	18	29,5	8	6,2	9	3
	23410406-UNF3/8	234104-UNF3/8	UNF 3/8-24	9,525	100	20	33,5	10	8	11	4

≤ UNF 10: Without reduced neck after the thread

DIN 2184-1	Designation TICN	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	23460406-UNF7/16	234604-UNF7/16	UNF 7/16-20	11,113	100	20	76	8	6,2	9	4
	23460406-UNF1/2	234604-UNF1/2	UNF 1/2-20	12,7	100	23	73	9	7	10	4
	23460406-UNF5/8	234604-UNF5/8	UNF 5/8-18	15,875	100	25	58	12	9	12	4

C1

HSS-E PM machine taps

mm

Paradur® Ti



- Recommended with oil
- For long-chipping materials

≤
2×DN

C=2-3

15°

44HRC
1400-700
N/mm²

UNF
ASME B1.1

3B

	P	M	K	N	S	H	O
uncoated	●●	●	●	●	●●	●	●

~DIN 2184-1	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	234164-UNF10	UNF #10-32	4,826	70	16	16	6	4,9	8	3
	234164-UNF1/4	UNF 1/4-28	6,35	80	15	25	7	5,5	8	3
	234164-UNF5/16	UNF 5/16-24	7,938	90	18	29,5	8	6,2	9	3
	234164-UNF3/8	UNF 3/8-24	9,525	100	20	33,5	10	8	11	3

≤ UNF 10: Without reduced neck after the thread

DIN 2184-1	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	d ₁ h9 mm	□	l _g mm	N
	234664-UNF7/16	UNF 7/16-20	11,113	100	20	8	6,2	9	4
	234664-UNF1/2	UNF 1/2-20	12,7	100	23	9	7	10	4
	234664-UNF5/8	UNF 5/8-18	15,875	100	25	12	9	12	4

C1


HSS-E PM machine taps

mm

Paradur® Ti



- Recommended with oil
- For long-chipping materials



	P	M	K	N	S	H	O
uncoated	●●	●	●	●	●●	●	●

~DIN 2184-1	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	23416-UNF6	UNF #6-40	3,505	56	12	35	4	3	6	3
	23416-UNF10	UNF #10-32	4,826	70	16	16	6	4,9	8	3
	23416-UNF1/4	UNF 1/4-28	6,35	80	15	25	7	5,5	8	3
	23416-UNF5/16	UNF 5/16-24	7,938	90	18	29,5	8	6,2	9	3
	23416-UNF3/8	UNF 3/8-24	9,525	100	20	33,5	10	8	11	3

≤ UNF 10: Without reduced neck after the thread

DIN 2184-1	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	23466-UNF7/16	UNF 7/16-20	11,113	100	20	76	8	6,2	9	4
	23466-UNF1/2	UNF 1/2-20	12,7	100	23	73	9	7	10	4
	23466-UNF5/8	UNF 5/8-18	15,875	100	25	58	12	9	12	4

C1

HSS-E machine taps

mm


Prototex® X-pert P



- For long-chipping materials

UNEF
ASME B1.1

2B



$\leq 3 \times D_N$

$B=3,5-5$

32HRC
1000-200
N/mm²

	P	M	K	N	S	H	O
uncoated	●●			●			●

DIN 2184-1		Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	P233602-UNEF1/4	UNEF 1/4-32	6,35	80	15	59	4,5	3,4	6	3	
	P233602-UNEF5/16	UNEF 5/16-32	7,938	90	18	67	6	4,9	8	3	
	P233602-UNEF3/8	UNEF 3/8-32	9,525	90	20	67	7	5,5	8	3	
	P233602-UNEF7/16	UNEF 7/16-28	11,113	90	20	66	8	6,2	9	3	
	P233602-UNEF1/2	UNEF 1/2-28	12,7	100	21	73	9	7	10	4	
	P233602-UNEF9/16	UNEF 9/16-24	14,288	100	21	71	11	9	12	4	
	P233602-UNEF5/8	UNEF 5/8-24	15,875	100	21	58	12	9	12	4	
	P233602-UNEF11/16	UNEF 11/16-24	17,463	110	24	66	14	11	14	4	
	P233602-UNEF3/4	UNEF 3/4-20	19,05	110	24	66	14	11	14	4	
	P233602-UNEF7/8	UNEF 7/8-20	22,225	125	24	78	18	14,5	17	4	

C1


HSS-E machine taps

mm

Paradur® X-pert P



- For long-chipping materials



	P	M	K	N	S	H	O
uncoated	●	●	●	●	●	●	●

DIN 2184-1	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	P235692-UNE F1/4	UNE F 1/4-32	6,35	80	10	59	4,5	3,4	6	3
	P235692-UNE F5/16	UNE F 5/16-32	7,938	90	12	67	6	4,9	8	3
	P235692-UNE F3/8	UNE F 3/8-32	9,525	90	12	67	7	5,5	8	3
	P235692-UNE F7/16	UNE F 7/16-28	11,113	90	15	66	8	6,2	9	3
	P235692-UNE F1/2	UNE F 1/2-28	12,7	100	13	73	9	7	10	4
	P235692-UNE F9/16	UNE F 9/16-24	14,288	100	15	71	11	9	12	4
	P235692-UNE F5/8	UNE F 5/8-24	15,875	100	15	58	12	9	12	4
	P235692-UNE F11/16	UNE F 11/16-24	17,463	110	17	66	14	11	14	4
	P235692-UNE F3/4	UNE F 3/4-20	19,05	110	17	66	14	11	14	4
	P235692-UNE F7/8	UNE F 7/8-20	22,225	125	18	78	18	14,5	17	4
	P235692-UNE F1	UNE F 1"-20	25,4	140	20	93	18	14,5	17	5

C1

HSS-E machine taps

mm


Paradur® X-pert P



- For long-chipping materials

UN-8
ASME B1.1

2B



$\leq 3 \times D_N$

$C=2-3$

$\angle 45^\circ$

32HRC
1000
-200
N/mm²

	P	M	K	N	S	H	O
uncoated	●●			●			●

DIN 2184-1	Designation	D_N -P	D_N mm	l_1 mm	L_c mm	d_1 h9 mm	□	l_g mm	N
	unbeschichtet								
	P265676-UN1.1/8	UN 1.1/8-8	28,575	180	30	22	18	21	5
	P265676-UN1.1/4	UN 1.1/4-8	31,75	180	30	22	18	21	5
	P265676-UN1.3/8	UN 1.3/8-8	34,925	200	30	28	22	25	5
	P265676-UN1.1/2	UN 1.1/2-8	38,1	200	30	28	22	25	5
	P265676-UN1.5/8	UN 1.5/8-8	41,275	200	33	32	24	27	6
	P265676-UN1.3/4	UN 1.3/4-8	44,45	200	33	36	29	32	6
	P265676-UN1.7/8	UN 1.7/8-8	47,625	225	36	36	29	32	6
	P265676-UN2	UN 2"-8	50,8	225	36	40	32	35	6
	P265676-UN2.1/4	UN 2.1/4-8	57,15	250	36	45	35	38	6

C1

HSS-E machine taps

mm

Paradur® X-pert M



- For long-chipping materials

UN-8
ASME B1.1

3B

$\leq 2,5 \times D_N$

$C=2-3$

36HRC
1200-700
N/mm²

	P	M	K	N	S	H	O
VAP	●	●●					

DIN 2184-1-C	Designation VAP	D _N -P	D _N mm	l ₁ mm	L _c mm	d ₁ h9 mm	□	l _g mm	N
	M225532-UN1.1/8	UN 1.1/8-8	28,575	180	30	22	18	21	4
	M225532-UN1.1/4	UN 1.1/4-8	31,75	180	30	22	18	21	4
	M225532-UN1.3/8	UN 1.3/8-8	34,925	200	30	28	22	25	5

C1

HSS-E machine taps

mm


Paradur® X-pert M



– For long-chipping materials

UN-8
ASME B1.1

2B



$\leq 2,5 \times D_N$

$C=2-3$

$\angle 40^\circ$

36HRC
1200
-700
N/mm²

P	M	K	N	S	H	O
VAP	●	●●				

DIN 2184-1	Designation	D_N -P	D_N mm	l_1 mm	L_c mm	d_1 h9 mm	□	l_g mm	N
	VAP								
	M225632-UN1.1/8	UN 1.1/8-8	28,575	180	30	22	18	21	4
	M225632-UN1.1/4	UN 1.1/4-8	31,75	180	30	22	18	21	4
	M225632-UN1.3/8	UN 1.3/8-8	34,925	200	30	28	22	25	5
	M225632-UN1.1/2	UN 1.1/2-8	38,1	200	30	28	22	25	5
	M225632-UN1.5/8	UN 1.5/8-8	41,275	200	33	32	24	27	5
	M225632-UN1.3/4	UN 1.3/4-8	44,45	200	33	36	29	32	6
	M225632-UN1.7/8	UN 1.7/8-8	47,625	225	36	36	29	32	6
	M225632-UN2	UN 2"-8	50,8	225	36	40	32	35	6

C1


HSS-E PM machine taps

mm

Paradur® Ni 10



- External diameter, rounded
- For long- and short-chipping materials



	P	M	K	N	S	H	O
uncoated	●●	●	●	●	●●	●	●

~DIN 371	Designation unbeschichtet	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	□	l_g mm	N
	2041014-MJ3	MJ 3	0,5	56	8	35	3,5	2,7	6	3
	2041014-MJ4	MJ 4	0,7	63	10,5	42	4,5	3,4	6	3
	2041014-MJ5	MJ 5	0,8	70	13	47	6	4,9	8	3
	2041014-MJ6	MJ 6	1	80	15,5	57	6	4,9	8	3

Without reduced neck after the thread

HSS-E PM machine taps

mm

Paradur® Ti



- Recommended with oil
- External diameter, rounded

$\leq 2 \times D_N$

$C=2-3$

$\angle 15^\circ$

44HRC
 1400
 -700
 N/mm²

MJ
 DIN ISO 5855-1

ISO1/4H

	P	M	K	N	S	H	O
uncoated	●●			●	●●		

~DIN 371	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	204164-MJ3	MJ 3	0,5	56	10	10	3,5	2,7	6	3
	204164-MJ4	MJ 4	0,7	63	13	13	4,5	3,4	6	3
	204164-MJ5	MJ 5	0,8	70	16	16	6	4,9	8	3
	204164-MJ6	MJ 6	1	80	15	23	6	4,9	8	3
	204164-MJ8	MJ 8	1,25	90	18	29,5	8	6,2	9	3
	204164-MJ10	MJ 10	1,5	100	20	33,5	10	8	11	3

≤ MJ 5: Without reduced neck after the thread

C1


HSS-E PM machine taps

mm

Paradur® Ni 10



- External diameter, rounded
- For long- and short-chipping materials



	P	M	K	N	S	H	O
uncoated	●●			●	●●		

~DIN 2184-1	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	d ₁ h9 mm	□	l _g mm	N
	224101-UNJC4	UNJC #4-40	2,845	56	8	3,5	2,7	6	3
	224101-UNJC6	UNJC #6-32	3,505	56	10	4	3	6	3
	224101-UNJC8	UNJC #8-32	4,166	63	11	4,5	3,4	6	3
	224101-UNJC10	UNJC #10-24	4,826	70	13,5	6	4,9	8	3
	224101-UNJC1/4	UNJC 1/4-20	6,35	80	17,5	7	5,5	8	3
	224101-UNJC5/16	UNJC 5/16-18	7,938	90	21	8	6,2	9	3
	224101-UNJC3/8	UNJC 3/8-16	9,525	100	25	10	8	11	3

≤ UNC 10: Without reduced neck after the thread

HSS-E PM machine taps

mm

Paradur® Ni 10



- External diameter, rounded
- For long- and short-chipping materials

$\leq 1,5 \times D_N$

$C=2-3$

$\angle 10^\circ$

49HRC
 1600
 -1000
 N/mm²

UNJF
 ASME B1.15

3B

	P	M	K	N	S	H	O
uncoated	●●			●	●●		

~DIN 2184-1	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	d ₁ h9 mm	□	l _g mm	N
	234101-UNJF6	UNJF #6-40	3,505	56	9,5	4	3	6	3
	234101-UNJF8	UNJF #8-36	4,166	63	11	4,5	3,4	6	3
	234101-UNJF10	UNJF #10-32	4,826	70	12,5	6	4,9	8	3
	234101-UNJF1/4	UNJF 1/4-28	6,35	80	16	7	5,5	8	3
	234101-UNJF5/16	UNJF 5/16-24	7,938	90	20	8	6,2	9	3
	234101-UNJF3/8	UNJF 3/8-24	9,525	100	23	10	8	11	3

≤ UNJF 10: Without reduced neck after the thread

C1


HSS-E PM machine taps

mm

Paradur® Ti Plus





- Recommended with emulsion
- External diameter, rounded



UNJF
ASME B1.15

3B



~DIN 2184-1	Designation ACN	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	2340663-UNJF10	UNJF #10-32	4,826	70	16	16	6	4,9	8	3
	2340663-UNJF1/4	UNJF 1/4-28	6,35	80	15	25	7	5,5	8	3
	2340663-UNJF5/16	UNJF 5/16- 24	7,938	90	18	29,5	8	6,2	9	3
	2340663-UNJF3/8	UNJF 3/8-24	9,525	100	20	33,5	10	8	11	3

UNJF 10: Without reduced neck after the thread

HSS-E PM machine taps

mm

Prototex® TiNi Plus



- Recommended with emulsion
- External diameter, rounded

$\leq 2 \times D_N$

$B=3,5-5$

44HRC
 1400
 -700
 N/mm²

UNJF
 ASME B1.15

3B

	P	M	K	N	S	H	O
ACN					●●		

~DIN 2184-1	Designation ACN	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	2320763-UNJF10	UNJF #10-32	4,826	70	16	16	6	4,9	8	3
	2320763-UNJF1/4	UNJF 1/4-28	6,35	80	15	25	7	5,5	8	3
	2320763-UNJF5/16	UNJF 5/16-24	7,938	90	18	29,5	8	6,2	9	3
	2320763-UNJF3/8	UNJF 3/8-24	9,525	100	20	33,5	10	8	11	3

UNJF 10: Without reduced neck after the thread


HSS-E PM machine taps

mm

Prototex® Eco Plus




– For long-chipping materials



	P	M	K	N	S	H	O
THL	●●	●●	●●	●●			

DIN 5156

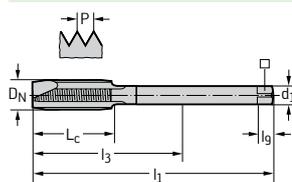

Designation THL	D _N -P	D _N mm	Threads per inch	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _q mm	N
EP2426302-G1/8	G 1/8-28	9,728	28	90	20	67	7	5,5	8	3
EP2426302-G1/4	G 1/4-19	13,157	19	100	21	71	11	9	12	4
EP2426302-G3/8	G 3/8-19	16,662	19	100	21	58	12	9	12	4
EP2426302-G1/2	G 1/2-14	20,955	14	125	24	80	16	12	15	4
EP2426302-G5/8	G 5/8-14	22,911	14	125	24	78	18	14,5	17	4
EP2426302-G3/4	G 3/4-14	26,441	14	140	26	77	20	16	19	5
EP2426302-G1	G 1"-11	33,249	11	160	28	93	25	20	23	5

HSS-E machine taps

mm

Prototex® X-pert P



- For long-chipping materials

$\leq 3 \times D_N$

$B=3,5-5$

32HRC
 $1000-200$
 N/mm^2

G (BSP)
 DIN EN ISO 228

	P	M	K	N	S	H	O
uncoated	●	●	●	●	●	●	●
TIN	●	●	●	●	●	●	●

DIN 5156		Designation TIN	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	P2436005-G1/8	P24360-G1/8	G 1/8-28	9,728	28	90	20	67	7	5,5	8	3
	P2436005-G1/4	P24360-G1/4	G 1/4-19	13,157	19	100	21	71	11	9	12	3
	P2436005-G3/8	P24360-G3/8	G 3/8-19	16,662	19	100	21	58	12	9	12	4
	P2436005-G1/2	P24360-G1/2	G 1/2-14	20,955	14	125	24	80	16	12	15	4
		P24360-G5/8	G 5/8-14	22,911	14	125	24	78	18	14,5	17	4
	P2436005-G3/4	P24360-G3/4	G 3/4-14	26,441	14	140	26	77	20	16	19	4
		P24360-G7/8	G 7/8-14	30,201	14	150	26	85	22	18	21	4
	P2436005-G1	P24360-G1	G 1"-11	33,249	11	160	28	93	25	20	23	4
		P24360-G1.1/4	G 1.1/4-11	41,91	11	170	28	72	32	24	27	4
		P24360-G1.1/2	G 1.1/2-11	47,803	11	190	30	87	36	29	32	5
		P24360-G2	G 2"-11	59,614	11	220	34	87	45	35	38	5


l_g dimensions in accordance with DIN 10

C1

HSS-E machine taps

mm

Prototex® X-pert M



– For long-chipping materials



	P	M	K	N	S	H	O
VAP	●	●●	●	●	●	●	●
TIN	●	●●	●	●	●	●	●

DIN 5156	Designation	Designation	D_N -P	D_N mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	□	l_g mm	N	
	TIN	VAP										
	M2426305-G1/8	M24263-G1/8	G 1/8-28	9,728	28	90	20	67	7	5,5	8	3
	M2426305-G1/4	M24263-G1/4	G 1/4-19	13,157	19	100	21	71	11	9	12	4
	M2426305-G3/8	M24263-G3/8	G 3/8-19	16,662	19	100	21	58	12	9	12	4
	M2426305-G1/2	M24263-G1/2	G 1/2-14	20,955	14	125	24	80	16	12	15	4
	M2426305-G3/4	M24263-G3/4	G 3/4-14	26,441	14	140	26	77	20	16	19	4
	M2426305-G1	M24263-G1	G 1"-11	33,249	11	160	28	93	25	20	23	5


HSS-E taps, short

mm

KMB Ms



- For short-chipping materials

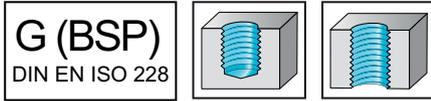

≤
3×DN

F=1-1,5

S
+l₁

25HRC
850
-350
N/mm²

	P	M	K	N	S	H	O
uncoated				●●			●

DIN 5157	Designation unbeschichtet	D _N -P	D _N mm	Threads per inch	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N	Diagram	
												DN	d ₁
	24165-G1/8	G 1/8-28	9,728	28	63	20	40	7	5,5	8	3		
	24165-G1/4	G 1/4-19	13,157	19	70	20	41	11	9	12	4		
	24165-G3/8	G 3/8-19	16,662	19	70	20	28	12	9	12	4		
	24165-G1/2	G 1/2-14	20,955	14	80	22	35	16	12	15	6		
	24165-G3/4	G 3/4-14	26,441	14	90	22	27	20	16	19	6		
	24165-G1	G 1"-11	33,249	11	100	25	33	25	20	23	6		

Thread machining allowance 0.05 mm

DIN 5157	Designation unbeschichtet	D _N -P	D _N mm	Threads per inch	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N	Diagram	
												DN	d ₁
	24195-G1/8	G 1/8-28	9,728	28	63	20	40	7	5,5	8	3		
	24195-G1/4	G 1/4-19	13,157	19	70	20	41	11	9	12	4		
	24195-G3/8	G 3/8-19	16,662	19	70	20	28	12	9	12	4		
	24195-G1/2	G 1/2-14	20,955	14	80	22	35	16	12	15	6		
	24195-G3/4	G 3/4-14	26,441	14	90	22	27	20	16	19	6		

Thread machining allowance 0.1 mm

C1


HSS-E PM machine taps

mm

Paradur® Eco Plus



– For long-chipping materials



	P	M	K	N	S	H	O
THL	●	●	●	●			

DIN 5156	Designation THL	D _N -P	D _N mm	Threads per inch	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	EP2456302-G1/8	G 1/8-28	9,728	28	90	12	67	7	5,5	8	3
	EP2456302-G1/4	G 1/4-19	13,157	19	100	15	71	11	9	12	4
	EP2456302-G3/8	G 3/8-19	16,662	19	100	15	58	12	9	12	4
	EP2456302-G1/2	G 1/2-14	20,955	14	125	18	80	16	12	15	4
	EP2456302-G5/8	G 5/8-14	22,911	14	125	18	78	18	14,5	17	4
	EP2456302-G3/4	G 3/4-14	26,441	14	140	20	77	20	16	19	5
	EP2456302-G1	G 1"-11	33,249	11	160	22	93	25	20	23	5

HSS-E machine taps

mm

Paradur® Synchrospeed



- For long-chipping materials
- Only for synchronous machining (rigid tapping)

$\leq 2,5 \times D_N$

$C=2-3$

$\angle 40^\circ$

40HRC
1300 N/mm²

G (BSP)
DIN EN ISO 228

	P	M	K	N	S	H	O
THL	●	●	●	●	●		●

~DIN 5156	Designation THL	D _N -P	D _N mm	Threads per inch	l ₁ mm	L _c mm	l ₃ mm	d ₁ h6 mm	□	l _g mm	N
	S2456302-G1/8	G 1/8-28	9,728	28	90	9,5	39	10	8	11	3
	S2456302-G1/4	G 1/4-19	13,157	19	100	14	46	14	11	14	3
	S2456302-G3/8	G 3/8-19	16,662	19	100	14	62,5	16	12	15	4
	S2456302-G1/2	G 1/2-14	20,955	14	125	19	50	20	16	19	4

C1



HSS-E machine taps

mm

Paradur® H



– For long- and short-chipping materials

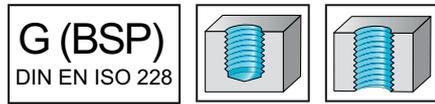

	P	M	K	N	S	H	O
uncoated			●	●●			●

DIN 5156	Designation unbeschichtet	D _N -P	D _N mm	Threads per inch	l ₁ mm	L _c mm	l ₃ mm	d ₁ h ₉ mm	N
	24361-G1/8	G 1/8-28	9,728	28	90	20	67	7	3
	24361-G1/4	G 1/4-19	13,157	19	100	21	71	11	4
	24361-G3/8	G 3/8-19	16,662	19	100	21	58	12	4
	24361-G1/2	G 1/2-14	20,955	14	125	24	80	16	4
	24361-G5/8	G 5/8-14	22,911	14	125	24	78	18	4
	24361-G3/4	G 3/4-14	26,441	14	140	26	77	20	4
	24361-G1	G 1"-11	33,249	11	160	28	93	25	4
	24361-G1.1/4	G 1.1/4-11	41,91	11	170	28	72	32	4
	24361-G1.1/2	G 1.1/2-11	47,803	11	190	30	87	36	6
	24361-G2	G 2"-11	59,614	11	220	34	87	45	6
	24361-G2.1/2	G 2.1/2-11	75,184	11	275	38	138	50	6

C1


HSS-E machine taps

mm

Paradur® N



- For long-chipping materials



	P	M	K	N	S	H	O
uncoated	●●		●●	●●			

DIN 5156	Designation unbeschichtet	D_N -P	D_N mm	Threads per inch	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	□	l_g mm	N
	24460-G1/8	G 1/8-28	9,728	28	90	20	67	7	5,5	8	3
	24460-G1/4	G 1/4-19	13,157	19	100	21	71	11	9	12	4
	24460-G3/8	G 3/8-19	16,662	19	100	21	58	12	9	12	4
	24460-G1/2	G 1/2-14	20,955	14	125	24	80	16	12	15	4
	24460-G3/4	G 3/4-14	26,441	14	140	26	77	20	16	19	4
	24460-G1	G 1"-11	33,249	11	160	28	93	25	20	23	4

C1


HSS-E machine taps

mm

Paradur® X-pert P



– For long-chipping materials



	P	M	K	N	S	H	O
uncoated	●	●	●	●	●	●	●
TIN	●	●	●	●	●	●	●

DIN 5156		Designation TIN	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	P2456905-G1/8	P24569-G1/8	G 1/8-28	9,728	28	90	12	67	7	5,5	8	3
	P2456905-G1/4	P24569-G1/4	G 1/4-19	13,157	19	100	15	71	11	9	12	4
	P2456905-G3/8	P24569-G3/8	G 3/8-19	16,662	19	100	15	58	12	9	12	4
	P2456905-G1/2	P24569-G1/2	G 1/2-14	20,955	14	125	18	80	16	12	15	4
		P24569-G5/8	G 5/8-14	22,911	14	125	18	78	18	14,5	17	4
	P2456905-G3/4	P24569-G3/4	G 3/4-14	26,441	14	140	20	77	20	16	19	5
		P24569-G7/8	G 7/8-14	30,201	14	150	20	85	22	18	21	5
	P2456905-G1	P24569-G1	G 1"-11	33,249	11	160	22	93	25	20	23	5
		P24569-G1.1/8	G 1.1/8-11	37,897	11	170	22	101	28	22	25	5
		P24569-G1.1/4	G 1.1/4-11	41,91	11	170	22	72	32	24	27	6
		P24569-G1.1/2	G 1.1/2-11	47,803	11	190	24	87	36	29	32	6
		P24569-G1.3/4	G 1.3/4-11	53,746	11	190	26	60	40	32	35	6
		P24569-G2	G 2"-11	59,614	11	220	28	87	45	35	38	6

C1

HSS-E machine taps

mm

Paradur® STE



- For long-chipping materials

$\leq 2,5 \times D_N$

$E=1,5-2$

$\angle 40^\circ$

36HRC
1200-350
N/mm²

G (BSP)
DIN EN ISO 228

	P	M	K	N	S	H	O
uncoated	●	●	●	●	●	●	●
THL	●	●	●	●	●	●	●


DIN 5156	Designation	Designation	D_N -P	D_N mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	□	l_g mm	N	
	THL	unbeschichtet										
	2456062-G1/8	245606-G1/8	G 1/8-28	9,728	28	90	12	67	7	5,5	8	4
	2456062-G1/4	245606-G1/4	G 1/4-19	13,157	19	100	15	71	11	9	12	5
	2456062-G3/8	245606-G3/8	G 3/8-19	16,662	19	100	15	58	12	9	12	5
	2456062-G1/2	245606-G1/2	G 1/2-14	20,955	14	125	18	80	16	12	15	5

HSS-E (-PM) machine taps

TC142 Supreme



- WY80FC: Best chip control
- WW60RB: Best wear resistance



	P	M	K	N	S	H	O
WY80FC	●	●●					

DIN 5156	Designation WY80FC	D _N -P	D _N mm	Threads per inch	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC142-G1/8-L0-	G 1/8-28	9,728	28	90	12	67	7	5,5	8	3
	TC142-G1/4-L0-	G 1/4-19	13,157	19	100	15	71	11	9	12	4

Ordering example for the grade WY80FC: TC142-G1/4-L0-WY80FC


HSS-E machine taps

mm

Paradur® X-pert M



- For long-chipping materials



	P	M	K	N	S	H	O
VAP	●	●●	●	●	●	●	●
TIN	●	●●	●	●	●	●	●

DIN 5156	Designation TIN	Designation VAP	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N	
	M2456305-G1/8	M24563-G1/8	G 1/8-28	9,728	28	90	12	67	7	5,5	8	3
	M2456305-G1/4	M24563-G1/4	G 1/4-19	13,157	19	100	15	71	11	9	12	4
	M2456305-G3/8	M24563-G3/8	G 3/8-19	16,662	19	100	15	58	12	9	12	4
	M2456305-G1/2	M24563-G1/2	G 1/2-14	20,955	14	125	18	80	16	12	15	4
		M24563-G5/8	G 5/8-14	22,911	14	125	18	78	18	14,5	17	4
	M2456305-G3/4	M24563-G3/4	G 3/4-14	26,441	14	140	20	77	20	16	19	5
		M24563-G7/8	G 7/8-14	30,201	14	150	20	85	22	18	21	5
	M2456305-G1	M24563-G1	G 1"-11	33,249	11	160	22	93	25	20	23	5

C1


HSS-E machine taps

mm

Paradur Inox® 25



- For long-chipping materials



DIN 5156	Designation TIN	D_N -P	D_N mm	Threads per inch	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	□	l_g mm	N
	2456315-G1/4	G 1/4-19	13,157	19	100	18	71	11	9	12	5
	2456315-G3/8	G 3/8-19	16,662	19	100	22	58	12	9	12	5
	2456315-G1/2	G 1/2-14	20,955	14	125	25	80	16	12	15	6
	2456315-G3/4	G 3/4-14	26,441	14	140	28	77	20	16	19	6

HSS-E PM machine taps

mm

Paradur® Eco CI




- For short-chipping materials
- Nitrided

$\leq 3 \times D_N$

$C=2-3$

32HRC
 1000
 -100
 N/mm²

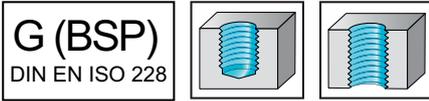

	P	M	K	N	S	H	O
NID			●●	●●			●●
TICN			●●	●●			●●

DIN 5156	Designation	Designation	D_N -P	D_N mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	□	l_g mm	N	
	NID	TICN										
	E24364-G1/8	E2436406-G1/8	G 1/8-28	9,728	28	90	20	67	7	5,5	8	4
	E24364-G1/4	E2436406-G1/4	G 1/4-19	13,157	19	100	21	71	11	9	12	4
	E24364-G3/8	E2436406-G3/8	G 3/8-19	16,662	19	100	21	58	12	9	12	5
	E24364-G1/2	E2436406-G1/2	G 1/2-14	20,955	14	125	24	80	16	12	15	5
	E24364-G3/4	E2436406-G3/4	G 3/4-14	26,441	14	140	26	77	20	16	19	6
	E24364-G1	E2436406-G1	G 1"-11	33,249	11	160	28	93	25	20	23	6
	E24364-G1.1/4	E2436406-G1.1/4	G 1.1/4-11	41,91	11	170	28	72	32	24	27	6
		E2436406-G1.1/2	G 1.1/2-11	47,803	11	190	30	87	36	29	32	6

C1


HSS-E machine taps

mm

Paradur® X-pert N



- For long-chipping materials



	P	M	K	N	S	H	O
uncoated				●	●		●

DIN 5156	Designation unbeschichtet	D _N -P	D _N mm	Threads per inch	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	N24566-G1/8	G 1/8-28	9,728	28	90	12	67	7	5,5	8	3

C1


HSS-E machine taps

mm

Paradur® Uni



- For long-chipping materials



	P	M	K	N	S	H	O
uncoated	●●		●	●			

DIN 5156	Designation unbeschichtet	D _N -P	D _N mm	Threads per inch	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	7456770-G1/8	G 1/8-28	9,728	28	90	12	67	7	5,5	8	3
	7456770-G1/4	G 1/4-19	13,157	19	100	15	71	11	9	12	4
	7456770-G3/8	G 3/8-19	16,662	19	100	15	58	12	9	12	4
	7456770-G1/2	G 1/2-14	20,955	14	125	18	80	16	12	15	4
	7456770-G3/4	G 3/4-14	26,441	14	140	20	77	20	16	19	5
	7456770-G1	G 1"-11	33,249	11	160	22	93	25	20	23	5

C1


HSS-E machine taps

mm


Paradur® H



- For long- and short-chipping materials

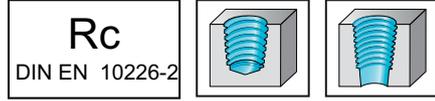

Rc
DIN EN 10226-2



	P	M	K	N	S	H	O
uncoated			●	●●			●

PWZ-NORM	Designation unbeschichtet	d ₁ h9 mm	l ₁ mm	l _g mm	N	D _N mm	D _N -P	L _c mm	Threads per inch	□
	24167-RC1/8	7	90	6	4	9,728	Rc 1/8-28	13	28	5,5
	24167-RC1/4	11	100	9	4	13,157	Rc 1/4-19	20	19	9
	24167-RC3/8	12	110	9	4	16,662	Rc 3/8-19	20	19	9
	24167-RC1/2	16	125	12	5	20,955	Rc 1/2-14	26	14	12
	24167-RC3/4	20	140	16	5	26,441	Rc 3/4-14	26	14	16
	24167-RC1	25	150	20	5	33,249	Rc 1"-11	32	11	20
	24167-RC1.1/4	32	160	24	6	41,91	Rc 1.1/4-11	32	11	24
	24167-RC1.1/2	36	180	29	6	47,803	Rc 1.1/2-11	32	11	29

Taper ratio 1:16


HSS-E machine taps

mm

Paradur® H




– For long- and short-chipping materials



	P	M	K	N	S	H	O
uncoated			●	●●			●

DIN 5156

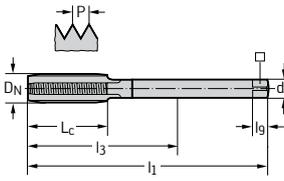

Designation unbeschichtet	D _N -P	D _N mm	Threads per inch	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	N
243612-RP1/8	Rp 1/8-28	9,728	28	90	20	67	7	3
243612-RP1/4	Rp 1/4-19	13,157	19	100	21	71	11	4
243612-RP3/8	Rp 3/8-19	16,662	19	100	21	58	12	4
243612-RP1/2	Rp 1/2-14	20,955	14	125	24	80	16	4
243612-RP3/4	Rp 3/4-14	26,441	14	140	26	77	20	4
243612-RP1	Rp 1"-11	33,249	11	160	28	93	25	4
243612-RP1.1/2	Rp 1.1/2-11	47,803	11	190	30	87	36	6



HSS-E machine taps

mm

Paradur® H



– For long- and short-chipping materials

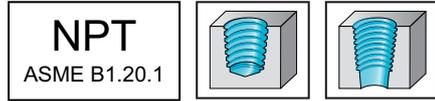

	P	M	K	N	S	H	O
uncoated			●	●●			●

PWZ-NORM	Designation unbeschichtet	d ₁ h9 mm	l ₁ mm	l _g mm	N	D _N mm	D _N -P	L _c mm	Threads per inch	□
	25167-NPT1/16	8	80	6	3	7,717	NPT 1/16-27	14	27	6,2
	25167-NPT1/8	11	90	9	3	10,065	NPT 1/8-27	14	27	9
	25167-NPT1/4	14	100	11	3	13,372	NPT 1/4-18	20	18	11
	25167-NPT3/8	16	110	12	4	16,812	NPT 3/8-18	20	18	12
	25167-NPT1/2	18	125	15	4	20,947	NPT 1/2-14	26	14	14,5
	25167-NPT3/4	22	140	18	5	26,292	NPT 3/4-14	26	14	18
	25167-NPT1	28	150	22	5	32,914	NPT 1"-11.5	31	11,5	22
	25167-NPT1.1/4	32	160	24	5	41,67	NPT 1.1/4-11.5	31	11,5	24
	25167-NPT1.1/2	36	160	29	6	47,74	NPT 1.1/2-11.5	31	11,5	29
	25167-NPT2	45	180	35	7	59,778	NPT 2"-11.5	31	11,5	35

Taper ratio 1:16

C1


HSS-E machine taps

mm

Paradur® N



– For long-chipping materials

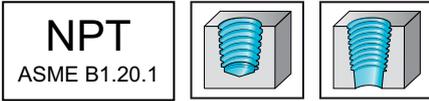

	P	M	K	N	S	H	O
VAP	●●		●●	●●			

PWZ-NORM	Designation VAP	d ₁ h9 mm	l ₁ mm	l _g mm	N	D _N mm	D _N -P	L _c mm	Threads per inch	□
	25460-NPT1/16	8	80	6	3	7,717	NPT 1/16-27	14	27	6,2
	25460-NPT1/8	11	90	9	3	10,065	NPT 1/8-27	14	27	9
	25460-NPT1/4	14	100	11	3	13,372	NPT 1/4-18	20	18	11
	25460-NPT3/8	16	110	12	4	16,812	NPT 3/8-18	20	18	12
	25460-NPT1/2	18	125	15	4	20,947	NPT 1/2-14	26	14	14,5
	25460-NPT3/4	22	140	18	5	26,292	NPT 3/4-14	26	14	18
	25460-NPT1	28	150	22	5	32,914	NPT 1"-11.5	31	11,5	22

Taper ratio 1:16


HSS-E machine taps

mm


Paradur Inox®



- For long-chipping materials




NPT
ASME B1.20.1



	P	M	K	N	S	H	O
VAP	●	●	●	■	■	■	■
THL	●	●	●	■	■	■	■

PWZ-NORM

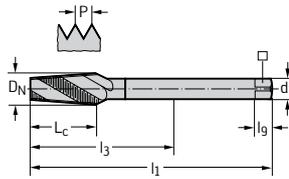

Designation THL	Designation VAP	d ₁ h9 mm	l ₁ mm	l ₉ mm	N	D _N mm	D _N -P	L _c mm		
	25567-NPT1/16	8	80	6	3	7,717	NPT 1/16-27	14	27	6,2
2556702-NPT1/8	25567-NPT1/8	11	90	9	4	10,065	NPT 1/8-27	14	27	9
2556702-NPT1/4	25567-NPT1/4	14	100	11	4	13,372	NPT 1/4-18	20	18	11
2556702-NPT3/8	25567-NPT3/8	16	110	12	5	16,812	NPT 3/8-18	20	18	12
2556702-NPT1/2	25567-NPT1/2	18	125	15	5	20,947	NPT 1/2-14	26	14	14,5
	25567-NPT3/4	22	140	18	5	26,292	NPT 3/4-14	26	14	18
	25567-NPT1	28	150	22	5	32,914	NPT 1"- 11.5	31	11,5	22

Taper ratio 1:16

C1


HSS-E machine taps

mm

Paradur Inox® 40



– For long-chipping materials

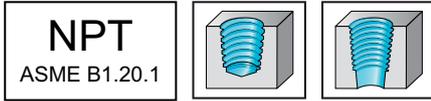

	P	M	K	N	S	H	O
uncoated	●	●	●	●			

PWZ-NORM		Designation unbeschichtet	d ₁ h9 mm	l ₁ mm	l _g mm	N	D _N mm	D _N -P	L _c mm	Threads per inch	□
		255630-NPT1/8	11	90	9	3	10,065	NPT 1/8-27	14	27	9
		255630-NPT1/4	14	100	11	3	13,372	NPT 1/4-18	20	18	11
		255630-NPT3/8	16	110	12	4	16,812	NPT 3/8-18	20	18	12
		255630-NPT1/2	18	125	15	4	20,947	NPT 1/2-14	26	14	14,5

Taper ratio 1:16



HSS-E machine taps

mm

Paradur® Ni



- For long-chipping materials

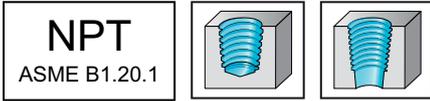

	P	M	K	N	S	H	O
uncoated	●	●	●	●	●	●	●
TICN	●	●	●	●	●	●	●

PWZ-NORM	Designation TICN	Designation unbeschichtet	d ₁ h9 mm	l ₁ mm	l _g mm	N	D _N mm	D _N -P	L _c mm		
	2546706-NPT1/16	25467-NPT1/16	8	80	6	3	7,717	NPT 1/16-27	14	27	6,2
	2546706-NPT1/8	25467-NPT1/8	11	90	9	4	10,065	NPT 1/8-27	14	27	9
	2546706-NPT1/4	25467-NPT1/4	14	100	11	4	13,372	NPT 1/4-18	20	18	11
	2546706-NPT3/8	25467-NPT3/8	16	110	12	5	16,812	NPT 3/8-18	20	18	12
	2546706-NPT1/2	25467-NPT1/2	18	125	15	5	20,947	NPT 1/2-14	26	14	14,5
	2546706-NPT3/4	25467-NPT3/4	22	140	18	5	26,292	NPT 3/4-14	26	14	18
	2546706-NPT1	25467-NPT1	28	150	22	5	32,914	NPT 1"- 11.5	31	11,5	22

Taper ratio 1:16

C1



HSS-E machine taps

mm

Paradur® H



– For long- and short-chipping materials

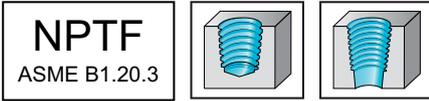

	P	M	K	N	S	H	O
uncoated			●	●●			●

PWZ-NORM	Designation unbeschichtet	d ₁ h9 mm	l ₁ mm	l _g mm	N	D _N mm	D _N -P	L _c mm	Threads per inch	□
	26167-NPTF1/16	8	80	6	3	7,635	NPTF 1/16-27	14	27	6,2
	26167-NPTF1/8	11	90	9	3	9,982	NPTF 1/8-27	14	27	9
	26167-NPTF1/4	14	100	11	3	13,313	NPTF 1/4-18	20	18	11
	26167-NPTF3/8	16	110	12	4	16,752	NPTF 3/8-18	20	18	12
	26167-NPTF1/2	18	125	15	4	20,921	NPTF 1/2-14	26	14	14,5
	26167-NPTF3/4	22	140	18	5	26,267	NPTF 3/4-14	26	14	18
	26167-NPTF1	28	150	22	5	32,839	NPTF 1"-11,5	31	11,5	22

Taper ratio 1:16

C1


HSS-E machine taps

mm

Paradur® N



- For long-chipping materials

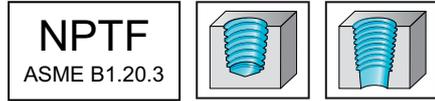

NPTF
ASME B1.20.3



	P	M	K	N	S	H	O
VAP	●●		●●	●●			

PWZ-NORM	Designation VAP	d ₁ h9 mm	l ₁ mm	l _g mm	N	D _N mm	D _N -P	L _c mm	Threads per inch	□
	26460-NPTF1/16	8	80	6	3	7,635	NPTF 1/16-27	14	27	6,2
	26460-NPTF1/8	11	90	9	3	9,982	NPTF 1/8-27	14	27	9
	26460-NPTF1/4	14	100	11	3	13,313	NPTF 1/4-18	20	18	11
	26460-NPTF3/8	16	110	12	4	16,752	NPTF 3/8-18	20	18	12
	26460-NPTF1/2	18	125	15	4	20,921	NPTF 1/2-14	26	14	14,5
	26460-NPTF3/4	22	140	18	5	26,267	NPTF 3/4-14	26	14	18

Taper ratio 1:16

C1



HSS-E machine taps

mm

Paradur Inox®



– For long-chipping materials

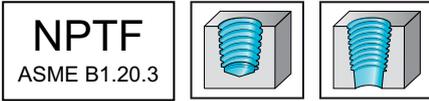

	P	M	K	N	S	H	O
VAP	●●	●●	●				

PWZ-NORM	Designation VAP	d ₁ h9 mm	l ₁ mm	l _g mm	N	D _N mm	D _N -P	L _c mm	Threads per inch	□
	26567-NPTF1/16	8	80	6	3	7,635	NPTF 1/16-27	14	27	6,2
	26567-NPTF1/8	11	90	9	4	9,982	NPTF 1/8-27	14	27	9
	26567-NPTF1/4	14	100	11	4	13,313	NPTF 1/4-18	20	18	11
	26567-NPTF1/2	18	125	15	5	20,921	NPTF 1/2-14	26	14	14,5

Taper ratio 1:16


HSS-E taps, short

mm

KMB H



– For long-chipping materials



	P	M	K	N	S	H	O
uncoated	●●		●●	●●			●

DIN 40432		Designation unbeschichtet	D _N -P	D _N mm	Threads per inch	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	27160-PG7	Pg 7-20		12,5	20	70	20	43	9	7	10	4
	27160-PG9	Pg 9-18		15,2	18	70	20	28	12	9	12	4
	27160-PG11	Pg 11-18		18,6	18	80	22	36	14	11	14	4
	27160-PG13.5	Pg 13.5-18		20,4	18	80	22	35	16	12	15	4
	27160-PG16	Pg 16-18		22,5	18	80	22	33	18	14,5	17	4
	27160-PG21	Pg 21-16		28,3	16	90	22	25	22	18	21	4

HSS-E machine taps

mm

Prototex® X-pert P



- For long-chipping materials

BSW
BS 84

mc

$\leq 3 \times D_N$

$B=3,5-5$

32HRC
1000-200
N/mm²

	P	M	K	N	S	H	O
uncoated	●●			●			●

DIN 2184-1	Designation unbeschichtet	D _N -P	D _N mm	Threads per inch	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	P28210-BSW1/8	BSW 1/8-40	3,175	40	56	10	18	3,5	2,7	6	2
	P28210-BSW3/16	BSW 3/16-24	4,763	24	70	13	25	6	4,9	8	2
	P28210-BSW1/4	BSW 1/4-20	6,35	20	80	15	30	7	5,5	8	3
	P28210-BSW5/16	BSW 5/16-18	7,938	18	90	18	35	8	6,2	9	3
	P28210-BSW3/8	BSW 3/8-16	9,525	16	100	20	39	10	8	11	3

DIN 2184-1	Designation unbeschichtet	D _N -P	D _N mm	Threads per inch	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	P28360-BSW7/16	BSW 7/16-14	11,113	14	100	20	76	8	6,2	9	3
	P28360-BSW1/2	BSW 1/2-12	12,7	12	110	23	83	9	7	10	3
	P28360-BSW5/8	BSW 5/8-11	15,875	11	110	25	68	12	9	12	3
	P28360-BSW3/4	BSW 3/4-10	19,05	10	125	30	81	14	11	14	4
	P28360-BSW7/8	BSW 7/8-9	22,225	9	140	30	93	18	14,5	17	4
	P28360-BSW1	BSW 1"-8	25,4	8	160	36	113	18	14,5	17	4

C1


HSS-E machine taps

mm

Paradur® X-pert P



– For long-chipping materials



	P	M	K	N	S	H	O
uncoated	●	●	●	●	●	●	●

DIN 2184-1	Designation unbeschichtet	D _N -P	D _N mm	Threads per inch	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	P28519-BSW1/8	BSW 1/8-40	3,175	40	56	6	18	3,5	2,7	6	3
	P28519-BSW3/16	BSW 3/16-24	4,763	24	70	8	25	6	4,9	8	3
	P28519-BSW1/4	BSW 1/4-20	6,35	20	80	10	30	7	5,5	8	3
	P28519-BSW5/16	BSW 5/16-18	7,938	18	90	12	35	8	6,2	9	3
	P28519-BSW3/8	BSW 3/8-16	9,525	16	100	15	39	10	8	11	3

C1

DIN 2184-1	Designation unbeschichtet	D _N -P	D _N mm	Threads per inch	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	P28569-BSW7/16	BSW 7/16-14	11,113	14	100	15	76	8	6,2	9	3
	P28569-BSW1/2	BSW 1/2-12	12,7	12	110	18	83	9	7	10	3
	P28569-BSW5/8	BSW 5/8-11	15,875	11	110	20	68	12	9	12	4
	P28569-BSW3/4	BSW 3/4-10	19,05	10	125	25	81	14	11	14	4
	P28569-BSW7/8	BSW 7/8-9	22,225	9	140	25	93	18	14,5	17	4
	P28569-BSW1	BSW 1"-8	25,4	8	160	30	113	18	14,5	17	4


HSS-E trapezoidal taps

mm

TMB



- Left-hand helix
- For long- and short-chipping materials



	P	M	K	N	S	H	O
uncoated	●●	●	●●	●●	●	●	●

PWZ-NORM	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	29100-TR8X1.5	Tr 8x1.5	1,5	90	45	67	6	4,9	8	3
	29100-TR10X2	Tr 10x2	2	135	60	112	7	5,5	8	3
	29100-TR10X3	Tr 10x3	3	145	90	122	7	5,5	8	3
	29100-TR12X3	Tr 12x3	3	175	90	151	8	6,2	9	3
	29100-TR14X3	Tr 14x3	3	180	90	152	10	8	11	3
	29100-TR14X4	Tr 14x4	4	215	120	187	10	8	11	3
	29100-TR16X4	Tr 16x4	4	220	120	191	11	9	12	3
	29100-TR18X4	Tr 18x4	4	225	120	183	12	9	12	3
	29100-TR20X4	Tr 20x4	4	230	120	186	14	11	14	3
	29100-TR22X5	Tr 22x5	5	265	150	220	16	12	15	3
	29100-TR24X5	Tr 24x5	5	275	150	228	18	14,5	17	3
	29100-TR26X5	Tr 26x5	5	295	150	232	20	16	19	3

C1

HSS-E trapezoidal taps

mm

TMB



- Right-hand helix
- For long- and short-chipping materials



	P	M	K	N	S	H	O
uncoated	●●	●●	●●	●●	●●	●●	●●

PWZ-NORM	Designation unbeschichtet	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	□	l_g mm	N
	29900-TR12X3	Tr 12x3	3	175	90	151	8	6,2	9	3
	29900-TR16X4	Tr 16x4	4	220	120	191	11	9	12	3

C1

HSS-E machine taps

mm

Prototex® X-pert P



– For long-chipping materials

EgM
DIN 8140

6H mod


$\leq 3 \times D_N$

$B=3,5-5$

32HRC
1000-200
N/mm²


	P	M	K	N	S	H	O
uncoated	●●			●			●

DIN 40435

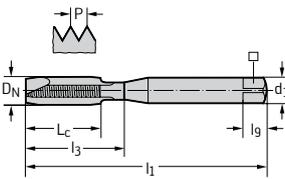

Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
P203009-EGM2.5	EGM 2.5	0,45	56	9	18	3,5	2,7	6	3
P203009-EGM3	EGM 3	0,5	63	12	21	4,5	3,4	6	3
P203009-EGM4	EGM 4	0,7	70	13	25	6	4,9	8	3
P203009-EGM5	EGM 5	0,8	80	15	30	6	4,9	8	3
P203009-EGM6	EGM 6	1	90	18	35	8	6,2	9	3
P203009-EGM8	EGM 8	1,25	100	20	39	10	8	11	3

DIN 40435

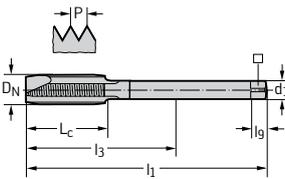

Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
P203509-EGM10	EGM 10	1,5	100	21	73	9	7	10	3
P203509-EGM12	EGM 12	1,75	110	25	81	11	9	12	3
P203509-EGM16	EGM 16	2	125	30	81	14	11	14	4

C1

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E machine taps

mm


Prototex® X-pert M



- For long-chipping materials

EgM
DIN 8140

6H mod



$\leq 3 \times D_N$

	P	M	K	N	S	H	O
VAP	●	●●					

DIN 40435										
	Designation VAP	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_2 mm	l_9 mm	N
	M203009-EGM2.5	EGM 2.5	0,45	56	9	18	3,5	2,7	6	2
	M203009-EGM3	EGM 3	0,5	63	12	21	4,5	3,4	6	2
	M203009-EGM4	EGM 4	0,7	70	13	25	6	4,9	8	3
	M203009-EGM5	EGM 5	0,8	80	15	30	6	4,9	8	3
	M203009-EGM6	EGM 6	1	90	18	35	8	6,2	9	3
	M203009-EGM8	EGM 8	EGM 8	1,25	100	20	39	10	8	11

C1

WALTER SELECT

 ●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E PM machine taps

mm

Prototex® TiNi



- Recommended with oil
- For long-chipping materials

≤
2×DN

B=3,5-5

44HRC
1400
-700
N/mm²

EgM
LN 9499

ISO1/4H

	P	M	K	N	S	H	O
uncoated	●●	●●	●	●	●●	●	●

~DIN 40435	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	20207-EGM4	EGM 4	0,7	70	16	16	6	4,9	8	3
	20207-EGM5	EGM 5	0,8	80	15	23	6	4,9	8	3
	20207-EGM6	EGM 6	1	90	18	29	8	6,2	9	3
	20207-EGM8	EGM 8	1,25	100	20	33	10	8	11	3

EGM 4: Without reduced neck after the thread

HSS-E machine taps

mm

Paradur® X-pert P



- For long-chipping materials

EgM
DIN 8140

6H mod

$\leq 3 \times D_N$

C=2-3

45°

32HRC
1000-200
N/mm²

	P	M	K	N	S	H	O
uncoated	●●			●			●

DIN 40435	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h ₉ mm	□	l _g mm	N
	P205099-EGM2.5	EGM 2.5	0,45	56	6	18	3,5	2,7	6	3
	P205099-EGM3	EGM 3	0,5	63	7	21	4,5	3,4	6	3
	P205099-EGM4	EGM 4	0,7	70	8	25	6	4,9	8	3
	P205099-EGM5	EGM 5	0,8	80	10	30	6	4,9	8	3
	P205099-EGM6	EGM 6	1	90	12	35	8	6,2	9	3
	P205099-EGM8	EGM 8	1,25	100	15	39	10	8	11	3

DIN 40435	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h ₉ mm	□	l _g mm	N
	P205599-EGM10	EGM 10	1,5	100	13	73	9	7	10	4
	P205599-EGM12	EGM 12	1,75	110	20	81	11	9	12	4
	P205599-EGM14	EGM 14	2	110	20	68	12	9	12	4
	P205599-EGM16	EGM 16	2	125	25	81	14	11	14	4
	P205599-EGM20	EGM 20	2,5	160	25	113	18	14,5	17	4
	P205599-EGM24	EGM 24	3	160	30	97	20	16	19	4

C1

WALTER
SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E machine taps

mm

Paradur® X-pert M



– For long-chipping materials

EgM
DIN 8140

6H mod

$\leq 2,5 \times D_N$

$C=2-3$

$\angle 40^\circ$

36HRC
1200
-700
N/mm²

	P	M	K	N	S	H	O
VAP	●	●●					

DIN 40435	Designation VAP	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	M205049-EGM2.5	EGM 2.5	0,45	56	6	18	3,5	2,7	6	3
	M205049-EGM3	EGM 3	0,5	63	7	21	4,5	3,4	6	3
	M205049-EGM4	EGM 4	0,7	70	8	25	6	4,9	8	3
	M205049-EGM5	EGM 5	0,8	80	10	30	6	4,9	8	3
	M205049-EGM6	EGM 6	1	90	12	35	8	6,2	9	3
	M205049-EGM8	EGM 8	1,25	100	15	39	10	8	11	3

DIN 40435	Designation VAP	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	M205549-EGM10	EGM 10	1,5	100	13	73	9	7	10	4
	M205549-EGM12	EGM 12	1,75	110	20	81	11	9	12	4
	M205549-EGM14	EGM 14	2	110	20	68	12	9	12	4
	M205549-EGM16	EGM 16	2	125	25	81	14	11	14	4

C1

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E machine taps

mm



Paradur® X-pert N



- For long-chipping materials


EgM
DIN 8140

6H mod




	P	M	K	N	S	H	O
uncoated				●●	●		●

DIN 40435

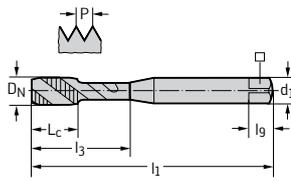

Designation unbeschichtet	DN	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
N205069-EGM2.5	EGM 2.5	0,45	56	6	18	3,5	2,7	6	2
N205069-EGM3	EGM 3	0,5	63	7	21	4,5	3,4	6	2
N205069-EGM4	EGM 4	0,7	70	8	25	6	4,9	8	2
N205069-EGM5	EGM 5	0,8	80	10	30	6	4,9	8	3
N205069-EGM6	EGM 6	1	90	12	35	8	6,2	9	3
N205069-EGM8	EGM 8	1,25	100	15	39	10	8	11	3

DIN 40435

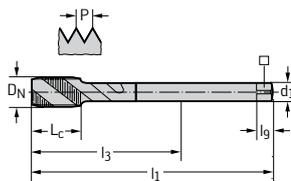

Designation unbeschichtet	DN	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
N205569-EGM10	EGM 10	1,5	100	13	73	9	7	10	3
N205569-EGM12	EGM 12	1,75	110	20	81	11	9	12	3
N205569-EGM16	EGM 16	2	125	25	81	14	11	14	4

C1

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E PM machine taps

mm

Paradur® Ni



– For long-chipping materials

EgM
LN 9499

ISO1/4H

$\leq 1,5 \times D_N$

$C=2-3$

$\angle 25^\circ$

44HRC
1400-700
N/mm²

	P	M	K	N	S	H	O
uncoated	●●		●●	●●	●		

~DIN 40435	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	204089-EGM4	EGM 4	0,7	70	16	16	6	4,9	8	3
	204089-EGM5	EGM 5	0,8	80	15	23	6	4,9	8	3
	204089-EGM6	EGM 6	1	90	18	29	8	6,2	9	3
	204089-EGM8	EGM 8	1,25	100	20	33,5	10	8	11	4

EGM 4: Without reduced neck after the thread

C1

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E PM machine taps

mm


Paradur® Ti



- Recommended with oil
- For long-chipping materials

EgM
LN 9499

ISO1/4H



$\leq 2 \times D_N$


$C=2-3$



15°

44HRC
1400
-700
N/mm²

	P	M	K	N	S	H	O
uncoated	●●			●	●●		

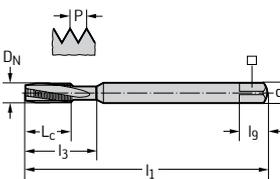~DIN 40435	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	204069-EGM4	EGM 4	0,7	70	16	16	6	4,9	8	3
	204069-EGM5	EGM 5	0,8	80	15	23	6	4,9	8	3
	204069-EGM6	EGM 6	1	90	18	29	8	6,2	9	3
	204069-EGM8	EGM 8	1,25	100	20	33,5	10	8	11	3

EGM 4: Without reduced neck after the thread

C1

**WALTER
SELECT**

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E machine taps

mm


Paradur® X-pert P



- For long-chipping materials

EgMF
DIN 8140

6H mod



$\leq 3 \times DN$


$C=2-3$

$\angle 45^\circ$

32HRC
1000
-200
N/mm²

	P	M	K	N	S	H	O
uncoated	●●			●			●

DIN 40435

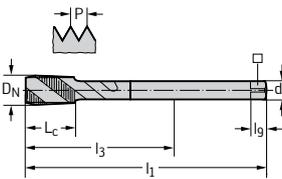

Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l ₉ mm	N
P215599-EGM8X1	EGMF 8x1	1	90	12	67	7	5,5	8	3
P215599-EGM10X1	EGMF 10x1	1	100	13	73	9	7	10	3
P215599-EGM12X1.5	EGMF 12x1.5	1,5	100	15	71	11	9	12	4
P215599-EGM14X1.5	EGMF 14x1.5	1,5	100	15	58	12	9	12	4
P215599-EGM16X1.5	EGMF 16x1.5	1,5	110	17	66	14	11	14	4

C1

HSS-E machine taps

mm

Prototex® X-pert P



- For long-chipping materials


$\leq 3 \times D_N$

$B=3,5-5$

32HRC
1000-200 N/mm²

EgUNC
NASM 33537

3B



	P	M	K	N	S	H	O
uncoated	●●			●			●

DIN 2184-1		Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	P223009-EGUNC6	EGUNC #6-32		4,536	70	13	25	6	4,9	8	3
	P223009-EGUNC8	EGUNC #8-32		5,197	80	15	30	6	4,9	8	3
	P223009-EGUNC10	EGUNC #10-24		6,201	80	15	30	7	5,5	8	3
	P223009-EGUNC1/4	EGUNC 1/4-20		8	90	18	35	8	6,2	9	3

C1

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E PM machine taps

mm

Prototex® TiNi



- Recommended with oil
- For long-chipping materials

$\leq 2 \times D_N$

$B=3,5-5$

44HRC
 1400-700
 N/mm²

EgUNC
 NASM 33537

3B

	P	M	K	N	S	H	O
uncoated	●●	●●	●●	●	●●	●	●

DIN 2184-1	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	222079-EGUNC4	EGUNC #4-40	3,67	63	13	13	4,5	3,4	6	3
	222079-EGUNC6	EGUNC #6-32	4,536	70	16	16	6	4,9	8	3
	222079-EGUNC8	EGUNC #8-32	5,197	80	15	23	6	4,9	8	3

≤ EGUNC 6: Without reduced neck after the thread

C1

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E machine taps

mm

Paradur® X-pert P



- For long-chipping materials

EgUNC
NASM 33537

3B

$\leq 3 \times D_N$

C=2-3

45°

32HRC
1000-200
N/mm²

	P	M	K	N	S	H	O
uncoated	●●			●			●

DIN 2184-1	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	P225099-EGUNC6	EGUNC #6-32	4,536	70	8	25	6	4,9	8	3
	P225099-EGUNC8	EGUNC #8-32	5,197	80	10	30	6	4,9	8	3
	P225099-EGUNC10	EGUNC #10-24	6,201	80	10	30	7	5,5	8	3
	P225099-EGUNC1/4	EGUNC 1/4-20	8	90	12	35	8	6,2	9	3

C1

**WALTER
SELECT**

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E machine taps

mm


Paradur® X-pert M



– For long-chipping materials

EgUNC
NASM 33537

3B



$\leq 2,5 \times D_N$

$C=2-3$

$\pm 5^\circ$

36HRC
1200
-700
N/mm²

	P	M	K	N	S	H	O
VAP	●	●●	●●●	●●●●	●●●●●	●●●●●●	●●●●●●●

DIN 2184-1		Designation VAP	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	M225049-EGUNC4	EGUNC #4-40		3,67	63	7	21	4,5	3,4	6	3
	M225049-EGUNC6	EGUNC #6-32		4,536	70	8	25	6	4,9	8	3
	M225049-EGUNC8	EGUNC #8-32		5,197	80	10	30	6	4,9	8	3
	M225049-EGUNC10	EGUNC #10-24		6,201	80	10	30	7	5,5	8	3
	M225049-EGUNC1/4	EGUNC 1/4-20		8	90	12	35	8	6,2	9	3

DIN 2184-1		Designation VAP	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	M225549-EGUNC5/16	EGUNC 5/16-18		9,771	100	15	77	7	5,5	8	3
	M225549-EGUNC3/8	EGUNC 3/8-16		11,587	100	13	73	9	7	10	3
	M225549-EGUNC1/2	EGUNC 1/2-13		15,238	110	20	68	12	9	12	4

C1

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E machine taps

mm


Paradur® X-pert N



- For long-chipping materials

EgUNC
NASM 33537


3B



$\leq 3 \times D_N$ C=2-3 $\angle 35^\circ$ 14HRC
 700-200 N/mm²

	P	M	K	N	S	H	O
uncoated				●●	●		●

DIN 2184-1

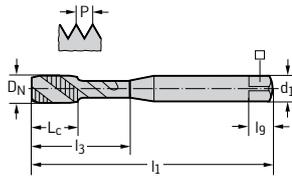

Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
N225069-EGUNC6	EGUNC #6-32	4,536	70	8	25	6	4,9	8	2
N225069-EGUNC8	EGUNC #8-32	5,197	80	10	30	6	4,9	8	2
N225069-EGUNC10	EGUNC #10-24	6,201	80	10	30	7	5,5	8	2
N225069-EGUNC1/4	EGUNC 1/4-20	8	90	12	35	8	6,2	9	2

C1

WALTER SELECT ●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E PM machine taps

mm

Paradur® Ti



- Recommended with oil
- For long-chipping materials

≤
2×DN


C=2-3

15°

44HRC
1400
-700
N/mm²

EgUNC
NASM 33537

3B



	P	M	K	N	S	H	O
uncoated	●●			●	●●		

~DIN 2184-1	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	224069-EGUNC4	EGUNC #4-40	3,67	63	13	13	4,5	3,4	6	3
	224069-EGUNC6	EGUNC #6-32	4,536	70	16	16	6	4,9	8	3
	224069-EGUNC8	EGUNC #8-32	5,197	80	15	23	6	4,9	8	3


≤ EGUNC 6: Without reduced neck after the thread

C1


HSS-E machine taps

mm

Prototex® X-pert P



- For long-chipping materials



	P	M	K	N	S	H	O
uncoated	●●			●			●

DIN 2184-1		Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	P233009-EGUNF6	EGUNF #6-40		4,33	70	13	25	6	4,9	8	3
	P233009-EGUNF10	EGUNF #10-32		5,857	80	15	30	6	4,9	8	3
	P233009-EGUNF8	EGUNF #8-36		5,083	80	15	30	6	4,9	8	3
	P233009-EGUNF1/4	EGUNF 1/4-28		7,528	90	18	35	8	6,2	9	3

DIN 2184-1		Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	P233509-EGUNF5/16	EGUNF 5/16-24		9,313	90	20	67	7	5,5	8	3
	P233509-EGUNF3/8	EGUNF 3/8-24		10,9	90	20	66	8	6,2	9	3
	P233509-EGUNF7/16	EGUNF 7/16-20		12,763	100	21	73	9	7	10	4
	P233509-EGUNF1/2	EGUNF 1/2-20		14,35	100	21	71	11	9	12	4

C1

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E machine taps

mm


Prototex® X-pert M



- For long-chipping materials

EgUNF
NASM 33537

3B




$\leq 3 \times D_N$

$B=3,5-5$

36HRC
1200
-700
N/mm²

	P	M	K	N	S	H	O
VAP	●	●●					

DIN 2184-1

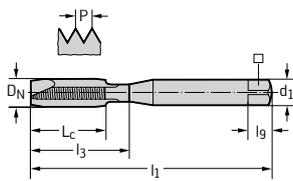

Designation VAP	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
M233009-EGUNF10	EGUNF #10-32	5,857	80	15	30	6	4,9	8	3
M233009-EGUNF8	EGUNF #8-36	5,083	80	15	30	6	4,9	8	3
M233009-EGUNF1/4	EGUNF 1/4-28	7,528	90	18	35	8	6,2	9	3

C1

**WALTER
SELECT**

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

●● Primary application ● Other application

HSS-E PM machine taps

mm

Prototex® TiNi



- Recommended with oil
- For long-chipping materials

≤
2×DN

B=3,5-5

44HRC
1400
-700
N/mm²

EgUNF
NASM 33537

3B

	P	M	K	N	S	H	O
uncoated	●●	●●	●●	●	●●	●	●

~DIN 2184-1	Designation unbeschichtet	DN-P	DN mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	232079-EGUNF10	EGUNF #10-32	5,857	80	15	23	6	4,9	8	3
	232079-EGUNF1/4	EGUNF 1/4-28	7,528	90	18	29,5	8	6,2	9	3
		EGUNF 5/16-24	9,313	100	20	33,5	10	8	11	3

DIN 2184-1	Designation unbeschichtet	DN-P	DN mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	232579-EGUNF3/8	EGUNF 3/8-24	10,9	100	20	76	8	6,2	9	3

C1

**WALTER
SELECT**

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E machine taps

mm

Paradur® X-pert P



– For long-chipping materials

EgUNF
NASM 33537

3B

$\leq 3 \times DN$

$C=2-3$

$\angle 45^\circ$

32HRC
1000
-200
N/mm²

	P	M	K	N	S	H	O
uncoated	●●			●			●

DIN 2184-1	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	P235099-EGUNF6	EGUNF #6-40	4,33	70	8	25	6	4,9	8	3
	P235099-EGUNF8	EGUNF #8-36	5,083	80	10	30	6	4,9	8	3
	P235099-EGUNF10	EGUNF #10-32	5,857	80	10	30	6	4,9	8	3
	P235099-EGUNF1/4	EGUNF 1/4-28	7,528	90	12	35	8	6,2	9	3

DIN 2184-1	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	d ₁ h9 mm	□	l _g mm	N
	P235599-EGUNF5/16	EGUNF 5/16-24	9,313	90	12	7	5,5	8	3
	P235599-EGUNF3/8	EGUNF 3/8-24	10,9	90	15	8	6,2	9	3
	P235599-EGUNF7/16	EGUNF 7/16-20	12,763	100	13	9	7	10	4
	P235599-EGUNF1/2	EGUNF 1/2-20	14,35	100	15	11	9	12	4

C1

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E machine taps

mm


Paradur® X-pert M



- For long-chipping materials

EgUNF
NASM 33537

3B



$\leq 2,5 \times D_N$


$C=2-3$



40°

36HRC
1200
-700
N/mm²

	P	M	K	N	S	H	O
VAP	●	●●					

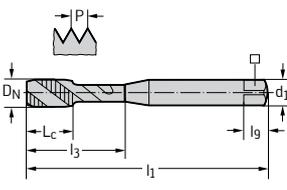DIN 2184-1	Designation VAP	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	M235049-EGUNF10	EGUNF #10-32	5,857	80	10	30	6	4,9	8	3
	M235049-EGUNF1/4	EGUNF 1/4-28	7,528	90	12	35	8	6,2	9	3

C1

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E machine taps

mm


Paradur® X-pert N



- For long-chipping materials

EgUNF
NASM 33537

3B



≤
3×DN

C=2-3

35°

14HRC
700
-200
N/mm²

	P	M	K	N	S	H	O
uncoated				●●	●		●

DIN 2184-1		Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	N235069-EGUNF10	EGUNF #10-32		5,857	80	10	30	6	4,9	8	2
	N235069-EGUNF1/4	EGUNF 1/4-28		7,528	90	12	35	8	6,2	9	3

C1

WALTER
SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E PM machine taps

mm



Paradur® Ni



- For long-chipping materials

EgUNF
NASM 33537

3B



	P	M	K	N	S	H	O
uncoated	●●		●●	●	●		

~DIN 2184-1	Designation	D _N -P	D _N	l ₁	L _c	l ₃	d ₁	□	l _g	N
	unbeschichtet		mm	mm	mm	mm	h9 mm		mm	
	234079-EGUNF10	EGUNF #10-32	5,857	80	15	23	6	4,9	8	3
	234079-EGUNF1/4	EGUNF 1/4-28	7,528	90	18	29,5	8	6,2	9	3
		EGUNF 5/16-24	9,313	100	20	33,5	10	8	11	4

DIN 2184-1	Designation	D _N -P	D _N	l ₁	L _c	l ₃	d ₁	□	l _g	N
	unbeschichtet		mm	mm	mm	mm	h9 mm		mm	
	234579-EGUNF3/8	EGUNF 3/8-24	10,9	100	20	76	8	6,2	9	4

C1

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E PM machine taps

mm

Paradur® Ti



- Recommended with oil
- For long-chipping materials

≤
2×DN

C=2-3

15°

44HRC
1400
-700
N/mm²

EgUNF
NASM 33537

3B

	P	M	K	N	S	H	O
uncoated	●●			●	●●		

~DIN 2184-1	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	234069-EGUNF10	EGUNF #10-32	5,857	80	15	23	6	4,9	8	3
	234069-EGUNF1/4	EGUNF 1/4-28	7,528	90	18	29,5	8	6,2	9	3
		EGUNF 5/16-24	9,313	100	20	33,5	10	8	11	3

DIN 2184-1	Designation unbeschichtet	D _N -P	D _N mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	234569-EGUNF3/8	EGUNF 3/8-24	10,9	100	20	76	8	6,2	9	4

C1

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

Solid carbide taps

Machining					
Thread depth	2 x D _N	2 x D _N	2 x D _N	3 x D _N	1,5 x D _N



Designation	Prototex® HSC	TC388 Supreme	TC389 Supreme	Paradur® HS	Paradur® N
Thread type					
M	✓	✓	✓	✓	✓
MF	✓			✓	
UNC / UNF / UN-8				✓	
G / Rc / Rp		✓			
MJ / UNJC / UNJF					
NPT / NPTF					
Pg / BSW / Tr					
Indexable inserts basic shape					
Tolerance	6HX	6HX / NORMAL	6HX	2B / 6H	6H
Coolant supply	Precision cooling	External	External	External	External
Chamfer form	B	C	D	C	C
Coating / grade	TICN	WJ30TU	WE10TU	TICN / uncoated	TICN / uncoated
Cutting tool material	VHM	VHM	VHM	VHM	VHM
P Steel	●●				●●
M Stainless steel					
K Cast iron	●●			●	●●
N NF metals				●●	●●
S Materials with difficult cutting properties		●	●	●	
H Hard materials		●●	●●	●	
O Other				●●	●
Page in catalogue	C 280	C 297	C 289	C 286	C 282
QR code					
www.walter-tools.com/woc/	prototex-hsc	TC388	TC389	paradur-hs	paradur-n

Solid carbide taps

Machining					
-----------	--	--	--	--	--

Thread depth	2 x D _N	3 x D _N	3 x D _N	3,5 x D _N	3,5 x D _N
--------------	--------------------	--------------------	--------------------	----------------------	----------------------



Designation	Paradur® HSC	Paradur® Engine	Paradur® HS	Paradur® GG	Paradur® N
Thread type					
M	✓	✓	✓	✓	✓
MF	✓	✓		✓	
UNC / UNF / UN-8					
G / Rc / Rp					
MJ / UNJC / UNJF					
NPT / NPTF					
Pg / BSW / Tr					
Indexable inserts basic shape					
Tolerance	6HX	6HX	6H	6HX	6H
Coolant supply	axial	axial	axial	axial	axial
Chamfer form	C	E	C	C	C
Coating / grade	TICN	uncoated	TICN	TAFT / uncoated	uncoated
Cutting tool material	VHM	VHM	VHM	VHM	VHM
P Steel	●●				
M Stainless steel					
K Cast iron	●●	●●	●	●●	●●
N NF metals		●●	●●	●	●●
S Materials with difficult cutting properties			●		
H Hard materials	●●		●		
O Other			●●	●	●
Page in catalogue	C 281	C 285	C 287	C 284	C 283
QR code					
www.walter-tools.com/woc/	paradur-hsc	paradur-engine	paradur-hs	paradur-gg	paradur-n

C1

Solid carbide machine taps

mm

Prototex® HSC



- For long-chipping materials
- Cooling grooves on the shank

$\leq 2 \times D_N$

$B=3,5-5$

44HRC
1400
-850
N/mm²

M
DIN 13

6HX

TICN	P	M	K	N	S	H	O
	●●		●●				

DIN 371	Designation TICN	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h6 mm	□	l _g mm	N
	8021006-M6	M 6	1	80	19	30	6	4,9	8	3
	8021006-M8	M 8	1,25	90	22	35	8	6,2	9	4
	8021006-M10	M 10	1,5	100	24	39	10	8	11	4

DIN 376	Designation TICN	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h6 mm	□	l _g mm	N
	8026006-M12	M 12	1,75	110	23	83	9	7	10	5

C1

**WALTER
SELECT**

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


Solid carbide machine taps

mm

Paradur® HSC



– For long- and short-chipping materials



	P	M	K	N	S	H	O
TICN	●●		●●			●●	

DIN 371	Designation TICN	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h6 mm	l_g mm	N
	8041056-M6	M 6	1	80	15	30	6	4,9	3
	8041056-M8	M 8	1,25	90	20	35	8	6,2	3
	8041056-M10	M 10	1,5	100	25	39	10	8	3

DIN 376	Designation TICN	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h6 mm	l_g mm	N
	8046056-M12	M 12	1,75	110	23	83	9	10	4

C1

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions



Solid carbide machine taps

mm

Paradur® N



- For long- and short-chipping materials

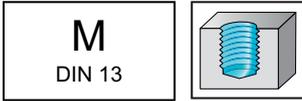

	P	M	K	N	S	H	O
uncoated			●●	●●			●
TICN	●●		●●	●●			●

~DIN 371	Designation	Designation	D_N	P	l_1	L_c	l_3	d_1	□	l_9	N
	TICN	unbeschichtet									
	8041006-M3	80410-M3	M 3	0,5	56	10	10	3,5	2,7	6	3
	8041006-M4	80410-M4	M 4	0,7	63	13	13	4,5	3,4	6	3
	8041006-M5	80410-M5	M 5	0,8	70	16	16	6	4,9	8	3
	8041006-M6	80410-M6	M 6	1	80	19	30	6	4,9	8	3
	8041006-M8	80410-M8	M 8	1,25	90	22	35	8	6,2	9	3
		80410-M10	M 10	1,5	100	24	39	10	8	11	3

C1

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


Solid carbide machine taps

mm

Paradur® N




– For long- and short-chipping materials

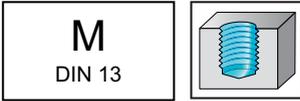

	P	M	K	N	S	H	O
uncoated			●●	●●			●


DIN 371

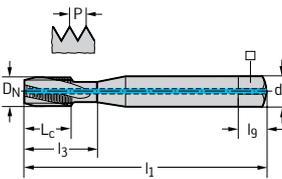

Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h6 mm	□	l _g mm	N
804101-M5	M 5	0,8	70	16	16	6	4,9	8	3
804101-M6	M 6	1	80	19	30	6	4,9	8	3
804101-M8	M 8	1,25	90	22	35	8	6,2	9	3
804101-M10	M 10	1,5	100	24	39	10	8	11	3

M 5: Without reduced neck after the thread

DIN 376

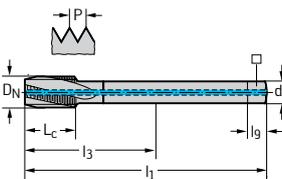

Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h6 mm	□	l _g mm	N
804601-M12	M 12	1,75	110	23	83	9	7	10	3

C1



Solid carbide machine taps

mm

Paradur® GG



- For short-chipping materials

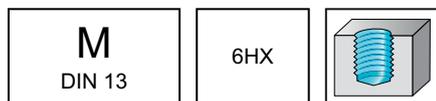

	P	M	K	N	S	H	O
uncoated			●●	●			●
TAFT			●●	●			●

DIN 371	Designation TAFT	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h6 mm	□	l ₉ mm	N
	8031417-M5	803141-M5	M 5	0,8	70	16	16	6	4,9	8	4
	8031417-M6	803141-M6	M 6	1	80	19	30	6	4,9	8	4
	8031417-M8	803141-M8	M 8	1,25	90	22	35	8	6,2	9	4
	8031417-M10	803141-M10	M 10	1,5	100	24	39	10	8	11	4

M 5: Without reduced neck after the thread

C1


Solid carbide machine taps

mm

Paradur® Engine



- Suitable coating according to requirements



	P	M	K	N	S	H	O
uncoated			●●	●●			

~DIN 371 L		Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h6 mm	□	l _g mm	N
		8031310-M6	M 6	1	80	15	30	6	4,9	8	3
		8031310-M7	M 7	1	100	15	30	7	5,5	8	3
		8031310-M8	M 8	1,25	120	18	35	8	6,2	9	3
		8031310-M10	M 10	1,5	140	20	39	10	8	11	3

~DIN 376 L		Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h6 mm	□	l _g mm	N
		8036310-M12	M 12	1,75	140	23	113	9	7	10	4


C1

●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions



Solid carbide machine taps

mm

Paradur® HS



- For short-chipping materials

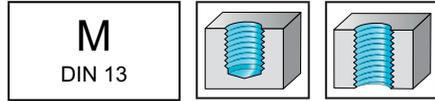

	P	M	K	N	S	H	O
uncoated			●	●●	●	●	●●
TICN			●	●●	●	●	●●

~DIN 371	Designation	Designation	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h6 mm	□	l_9 mm	N
	TICN	unbeschichtet									
	8031106-M3	80311-M3	M 3	0,5	56	10	35	3,5	2,7	6	3
	8031106-M4	80311-M4	M 4	0,7	63	13	42	4,5	3,4	6	3
	8031106-M5	80311-M5	M 5	0,8	70	16	47	6	4,9	8	3
	8031106-M6	80311-M6	M 6	1	80	20	57	6	4,9	8	3
	8031106-M8	80311-M8	M 8	1,25	90	25	66	8	6,2	9	3
	8031106-M10		M 10	1,5	100	30	72	10	8	11	3
	8031106-M12		M 12	1,75	110	36	68	12	9	12	3

Without reduced neck after the thread

C1

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions



Solid carbide machine taps

mm

Paradur® HS



– For short-chipping materials

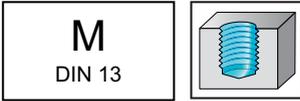

	P	M	K	N	S	H	O
TICN			●	●●	●	●	●●

~DIN 371	Designation TICN	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h6 mm	□	l _g mm	N
	8031116-M5	M 5	0,8	70	16	16	6	4,9	8	3
	8031116-M6	M 6	1	80	19	30	6	4,9	8	3
	8031116-M7	M 7	1	80	19	30	7	5,5	8	3
	8031116-M8	M 8	1,25	90	22	35	8	6,2	9	3
	8031116-M10	M 10	1,5	100	24	39	10	8	11	3

M 5: Without reduced neck after the thread

C1

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

Solid carbide machine taps


TC388 Supreme



- Taps for hardened materials
- Drill core hole at upper tolerance end


$\leq 2 \times D_N$



M
DIN 13
6HX


WJ30TU P M K N S H O

~DIN 371

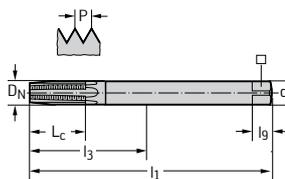

Designation WJ30TU	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h6 mm	l_g mm	N
TC388-M3-C0-	M 3	0,5	56	8	35	3,5	2,7	4
TC388-M4-C0-	M 4	0,7	63	11	42	4,5	3,4	5
TC388-M5-C0-	M 5	0,8	70	13,5	47	6	4,9	5
TC388-M6-C0-	M 6	1	80	16,5	57	6	4,9	5
TC388-M8-C0-	M 8	1,25	90	21,5	66	8	6,2	5
TC388-M10-C0-	M 10	1,5	100	27	72	10	8	5
TC388-M12-C0-	M 12	1,75	110	32	68	12	9	6
TC388-M16-C0-	M 16	2	110	41	65	16	12	6

Without reduced neck after the thread
Ordering example for the grade WJ30TU: TC388-M10-C0-WJ30TU

C1

WALTER SELECT

 ●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

Solid carbide machine taps

TC389 Supreme



- Taps for hardened materials
- Drill core hole at upper tolerance end

$\leq 2 \times D_N$


$D=3,5-5$

65HRC
55HRC

M

DIN 13

6HX



WE10TU

P	M	K	N	S	H	O

~DIN 371	Designation WE10TU	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h6 mm	□	l_g mm	N
	TC389-M3-CD-	M 3	0,5	56	9	35	3,5	2,7	6	4
	TC389-M4-CD-	M 4	0,7	63	12	42	4,5	3,4	6	5
	TC389-M5-CD-	M 5	0,8	70	14,5	47	6	4,9	8	5
	TC389-M6-CD-	M 6	1	80	18	57	6	4,9	8	5
	TC389-M8-CD-	M 8	1,25	90	23,5	66	8	6,2	9	5
	TC389-M10-CD-	M 10	1,5	100	29	72	10	8	11	5
	TC389-M12-CD-	M 12	1,75	110	34,5	68	12	9	12	6
TC389-M16-CD-	M 16	2	110	44	65	16	12	15	6	

Without reduced neck after the thread
 Ordering example for the grade WE10TU: TC389-M10-CD-WE10TU

C1

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

Solid carbide machine taps

mm

Prototex® HSC



- For long-chipping materials
- Cooling grooves on the shank

$\leq 2 \times D_N$

$B=3,5-5$

44HRC
1400
-850
N/mm²

MF
DIN 13

6HX

TICN

●	●	●	●	●	●	●
P	M	K	N	S	H	O

DIN 371	Designation TICN	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h6 mm	□	l _g mm	N
	8121006-M8X1	MF 8x1	1	90	22	35	8	6,2	9	4
	8121006-M10X1	MF 10x1	1	90	24	39	10	8	11	4

DIN 374	Designation TICN	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h6 mm	□	l _g mm	N
	8126006-M12X1.5	MF 12x1.5	1.5	100	21	73	9	7	10	5
	8126006-M14X1.5	MF 14x1.5	1.5	100	21	71	11	9	12	5
	8126006-M16X1.5	MF 16x1.5	1.5	100	21	58	12	9	12	5

C1

**WALTER
SELECT**

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


Solid carbide machine taps

mm

Paradur® HSC



– For long-chipping materials



	P	M	K	N	S	H	O
TICN	●●		●●			●●	

~DIN 371		Designation TICN	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h6 mm	□	l _g mm	N
		8141056-M6X0.75	MF 6x0.75	0,75	80	15	30	6	4,9	8	3
		8141056-M8X1	MF 8x1	1	90	20	35	8	6,2	9	3
		8141056-M10X1	MF 10x1	1	90	25	39	10	8	11	3

DIN 374		Designation TICN	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h6 mm	□	l _g mm	N
		8146056-M12X1	MF 12x1	1	100	20	73	9	7	10	3
		8146056-M12X1.5	MF 12x1.5	1,5	100	20	73	9	7	10	4
		8146056-M14X1.5	MF 14x1.5	1,5	100	21	71	11	9	12	4
		8146056-M16X1.5	MF 16x1.5	1,5	100	21	58	12	9	12	4

C1

**WALTER
SELECT**

●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


Solid carbide machine taps

mm

Paradur® GG



- For short-chipping materials



	P	M	K	N	S	H	O
TAFT			●●	●			●

DIN 374		Designation TAFT	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h6 mm	l_g mm	N	
		8136417-M8X1	MF 8x1	1	90	12	67	6	4,9	8	4
		8136417-M10X1	MF 10x1	1	90	14	67	7	5,5	8	4
		8136417-M12X1.5	MF 12x1.5	1,5	100	20	73	9	7	10	4

C1

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

Solid carbide machine taps

mm

Paradur® Engine



- Suitable coating according to requirements
- For short-chipping materials

MF
DIN 13

6HX

\leq
3×DN

$E=1,5-2$

L
 l_1

32HRC
1000
-200
N/mm²

	P	M	K	N	S	H	O
uncoated	●	●	●	●	●	●	●

~DIN 374 L	Designation unbeschichtet	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h6 mm	□	l ₉ mm	N
	8136310-M10X1	MF 10x1	1	140	20	117	7	5,5	8	4
	8136310-M12X1.25	MF 12x1.25	1,25	140	21	113	9	7	10	4
	8136310-M12X1.5	MF 12x1.5	1,5	140	21	113	9	7	10	4
	8136310-M16X1.5	MF 16x1.5	1,5	140	21	98	12	9	12	4

C1

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions



Solid carbide machine taps

mm

Paradur® HS




- For short-chipping materials

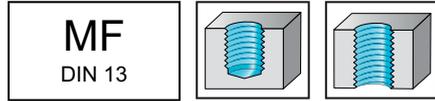

	P	M	K	N	S	H	O
uncoated			●	●●	●	●	●●

~DIN 371											
Designation unbeschichtet	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h6 mm	□	l_g mm	N		
81311-M8X1	MF 8x1	1	90	25	66	8	6,2	9	4		
81311-M10X1	MF 10x1	1	90	30	62	10	8	11	4		
81311-M14X1.5	MF 14x1.5	1,5	100	21	56	14	11	14	4		
81311-M16X1.5	MF 16x1.5	1,5	100	21	55	16	12	15	4		

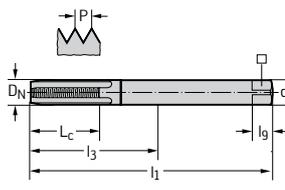

Without reduced neck after the thread

C1

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions



Solid carbide machine taps

mm

Paradur® HS



- For short-chipping materials

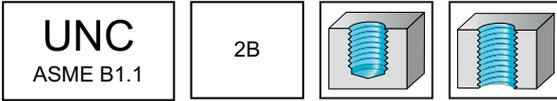

	P	M	K	N	S	H	O
TICN			●	●●	●	●	●●

~DIN 2184-1		Designation TICN	D_N -P	D_N mm	l_1 mm	L_c mm	l_3 mm	d_1 h6 mm	l_g mm	N
	8231106-UNC10	UNC #10-24	4,826	70	16	16	6	4,9	8	3
	8231106-UNC1/4	UNC 1/4-20	6,35	80	20	20	7	5,5	8	3
	8231106-UNC5/16	UNC 5/16-18	7,938	90	25	25	8	6,2	9	3
	8231106-UNC3/8	UNC 3/8-16	9,525	100	30	30	10	8	11	3

Without reduced neck after the thread

C1

WALTER SELECT

 ●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

Solid carbide machine taps

mm

Paradur® HS



- For short-chipping materials

UNF
ASME B1.1

2B

\leq
 $3 \times D_N$

$C=2-3$

$\geq 55\text{HRC}$

	P	M	K	N	S	H	O
TICN			●●	●●●	●	●	●●

~DIN 2184-1	Designation	D_N -P	D_N	l_1	L_c	l_3	d_1	□	l_g	N
	TICN		mm	mm	mm	mm	h6		mm	
	8331106-UNF10	UNF #10-32	4,826	70	16	47	6	4,9	8	3
	8331106-UNF1/4	UNF 1/4-28	6,35	80	20	57	7	5,5	8	3
	8331106-UNF3/8	UNF 3/8-24	9,525	90	30	62	10	8	11	3

Without reduced neck after the thread

C1

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

Solid carbide machine taps

TC388 Supreme



- Taps for hardened materials
- Drill core hole at upper tolerance end

$\leq 2 \times D_N$

$C=2-3$

63HRC
 50HRC

G (BSP)
DIN EN ISO 228

	P	M	K	N	S	H	O
WJ30TU					●	●●	

~DIN 371	Designation WJ30TU	D_N -P	D_N mm	Threads per inch	l_1 mm	L_c mm	l_3 mm	d_1 h6 mm	<input type="checkbox"/>	l_9 mm	N
	TC388-G1/8-C0-	G 1/8-28	9,728	28	90	23,5	62	10	<input type="checkbox"/>	11	5
	TC388-G1/4-C0-	G 1/4-19	13,157	19	100	32,5	56	14	<input type="checkbox"/>	14	6

Without reduced neck after the thread
 Ordering example for the grade WJ30TU: TC388-G1/4-C0-WJ30TU

C1

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

Walter TOOLSHOP Quick. Easy. Order.




It has never been easier to find, select and directly order the perfect tool solution.

Ordering 45,000 products round the clock is quick and easy with the Walter TOOLSHOP. This is ensured by the simple product search via filters or a search field, single sign-on and a variety of ordering options. It doesn't matter whether you are searching for an order number, using a Walter GPS recommendation or simply looking for the best tool solution. With Walter Innotime[®], you can find this solution in no time at all – simply by uploading a 3D model of your component. That is how tool support is done today.

Simple, secure, reliable and fast.

walter-tools.com

 **WALTER**
Engineering Kompetenz

C – Threading

C2: Thread forming

Page

HSS-E (-PM) and solid carbide thread formers

Product range overview

HSS-E (-PM) and solid carbide thread formers

300

Order pages

M – Metric thread

304

MF – Metric fine-pitch thread

336

UNC, UNF


349

G

353

HSS-E and solid carbide thread formers

Machining



Thread depth

 $2 \times D_N$
 $3 \times D_N$
 $3 \times D_N$
 $3 \times D_N$
 $3 \times D_N$


Designation

Protodyn® Eco LM

Protodyn® C

TC410 Advance

TC420 Supreme

TC430 Supreme

Thread type

M



MF

UNC / UNF / UN-8

G / Rc / Rp

MJ / UNJC / UNJF

NPT / NPTF

Pg / BSW / Tr

Indexable inserts basic shape

Tolerance

6HX

6GX / 6HX

6GX / 6HX / 7GX

6GX / 6HX

6HX

Coolant supply

External

External

External

External

External

Chamfer form

C

C

C / D

C

C

Coating / grade

CRN

NID / uncoated

WY80AD

WW60AD / WW60BA

WW60EL

Cutting tool material

HSS-E

HSS-E

HSS-E

HSS-E-PM

HSS-E-PM

P Steel



M Stainless steel



K Cast iron



N NF metals



S Materials with difficult cutting properties



H Hard materials



O Other



Page in catalogue

C 304

C 312


C 323

QR code


www.walter-tools.com/woc/
[protodyn-eco-lm](#)
[protodyn-c](#)
[TC410](#)
[TC420](#)
[TC430](#)
WALTER SELECT

●● Primary application ● Other application

HSS-E and solid carbide thread formers

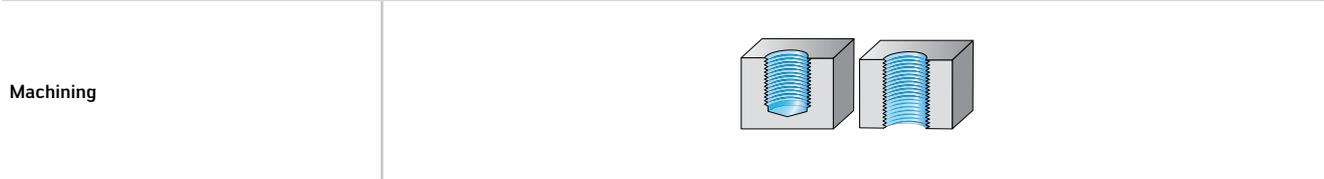

Thread depth	3 x D _N	3,5 x D _N			
--------------	--------------------	----------------------	----------------------	----------------------	----------------------



Designation	TC470 Supreme	Protodyn® S Synchrospeed	Protodyn® SC	Protodyn® SF	TC410 Advance
-------------	---------------	--------------------------	--------------	--------------	---------------

Thread type					
M	✓	✓	✓	✓	✓
MF		✓		✓	✓
UNC / UNF / UN-8					✓
G / Rc / Rp				✓	✓
MJ / UNJC / UNJF					
NPT / NPTF					
Pg / BSW / Tr					

Indexable inserts basic shape					
Tolerance	6HX	6HX	6GX / 6HX	6HX / NORMAL	2BX / 6GX / 6HX / 7GX / NORMAL

Coolant supply	External	External / radial	External	External	External
----------------	----------	-------------------	----------	----------	----------

Chamfer form	C	C	C	C	C
--------------	---	---	---	---	---

Coating / grade	WG20EL	TICN / TIN	NiD / uncoated	TICN	WY80AD
-----------------	--------	------------	----------------	------	--------

Cutting tool material	VHM	HSS-E	HSS-E	HSS-E	HSS-E
-----------------------	-----	-------	-------	-------	-------

P Steel	●●	●●	●	●●	●●
M Stainless steel		●●		●●	●●
K Cast iron	●				●
N NF metals	●	●●	●	●●	●●
S Materials with difficult cutting properties		●		●	●
H Hard materials					
O Other					

Page in catalogue	C 331			C 354	C 353
-------------------	-------	--	--	-------	-------





www.walter-tools.com/woc/	TC470	protodyn-s-	protodyn-sc	protodyn-sf	TC410
---------------------------	-------	-------------	-------------	-------------	-------

C2

HSS-E and solid carbide thread formers

Machining



Thread depth

 $3,5 \times D_N$
 $3,5 \times D_N$
 $3,5 \times D_N$
 $3,5 \times D_N$
 $3,5 \times D_N$


Designation

TC420 Supreme

TC430 Supreme

TC440 Supreme

TC470 Supreme

TC410 Advance

Thread type

M

✓

✓

✓

✓

MF

✓

✓

✓

✓

✓

UNC / UNF / UN-8

G / Rc / Rp

MJ / UNJC / UNJF

NPT / NPTF

Pg / BSW / Tr

Indexable inserts basic shape

Tolerance

6GX / 6HX

6GX / 6HX

6HX

6HX

6GX

Coolant supply

External / radial

External / radial

External / radial

External / radial

External

Chamfer form

C

C

C

C

E

Coating / grade

WW60AD / WW60BA

WW60AD / WW60EL

WY80AD

WG20EL

WY80AD

Cutting tool material

HSS-E-PM

HSS-E-PM

HSS-E

VHM

HSS-E

P Steel

●●

●●

●

●●

●●

M Stainless steel

●●

●

●●

●

●

K Cast iron

●

●

●

●

●

N NF metals

●●

●

●

●

●●

S Materials with difficult cutting properties

●

●

●

●

●

H Hard materials

O Other

Page in catalogue

C 319

C 326

C 330

C 335

C 338

QR code


www.walter-tools.com/woc/

TC420

TC430

TC440

TC470


TC410

WALTER SELECT

●● Primary application ● Other application

HSS-E and solid carbide thread formers

Machining



Thread depth	3,5 x D _N			
--------------	----------------------	----------------------	----------------------	----------------------



Designation	TC420 Supreme	TC430 Supreme	TC440 Supreme	TC470 Supreme
Thread type				
M	✓	✓	✓	✓
MF	✓	✓		✓
UNC / UNF / UN-8				
G / Rc / Rp				
MJ / UNJC / UNJF				
NPT / NPTF				
Pg / BSW / Tr				
Indexable inserts basic shape				
Tolerance	6GX / 6HX	6HX	6HX	6HX
Coolant supply	External / axial	axial	axial	axial
Chamfer form	C / E	C	C	C / E
Coating / grade	WW60AD / WW60BA	WW60AD / WW60EL	WY80AD	WG20EL
Cutting tool material	HSS-E-PM	HSS-E-PM	HSS-E	VHM
P Steel	●●	●●	●	●●
M Stainless steel	●●	●	●●	
K Cast iron	●	●		●
N NF metals	●●	●	●	●
S Materials with difficult cutting properties	●		●	
H Hard materials				
O Other				
Page in catalogue	C 313	C 325	C 329	C 333
QR code				
www.walter-tools.com/woc/	TC420	TC430	TC440	TC470


C2

HSS-E machine thread formers

TC410 Advance




- For long-chipping materials



	P	M	K	N	S	H	O
WY80AD	●●	●	●	●●	●		


DIN 2174

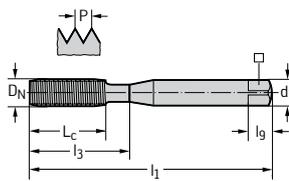

Designation WY80AD	DN	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l ₉ mm	N
TC410-M1-C0-	M 1	0,25	40	5	5	2,5	2,1	5	3
TC410-M1.1-C0-	M 1.1	0,25	40	5	5	2,5	2,1	5	3
TC410-M1.2-C0-	M 1.2	0,25	40	5	5	2,5	2,1	5	3
TC410-M1.4-C0-	M 1.4	0,3	40	7	7	2,5	2,1	5	3
TC410-M1.6-C0-	M 1.6	0,35	40	7	7	2,5	2,1	5	3
TC410-M1.7-C0-	M 1.7	0,35	40	7	7	2,5	2,1	5	3
TC410-M1.8-C0-	M 1.8	0,35	40	7	7	2,5	2,1	5	3
TC410-M2-C0-	M 2	0,4	45	6	11	2,8	2,1	5	3
TC410-M2.2-C0-	M 2.2	0,45	45	7	12	2,8	2,1	5	3
TC410-M2.3-C0-	M 2.3	0,4	45	7	12	2,8	2,1	5	3
TC410-M2.5-C0-	M 2.5	0,45	50	8	13	2,8	2,1	5	3
TC410-M2.6-C0-	M 2.6	0,45	50	8	14	2,8	2,1	5	3
TC410-M3-C0-	M 3	0,5	56	9	18	3,5	2,7	6	4
TC410-M3.5-C0-	M 3.5	0,6	56	11	20	4	3	6	4
TC410-M4-C0-	M 4	0,7	63	12	21	4,5	3,4	6	5
TC410-M5-C0-	M 5	0,8	70	13	25	6	4,9	8	5
TC410-M6-C0-	M 6	1	80	15	30	6	4,9	8	5
TC410-M7-C0-	M 7	1	80	15	30	7	5,5	8	5
TC410-M8-C0-	M 8	1,25	90	18	35	8	6,2	9	5
TC410-M10-C0-	M 10	1,5	100	20	39	10	8	11	6

Ordering example for the grade WY80AD: TC410-M1-C0-WY80AD

DIN 2174

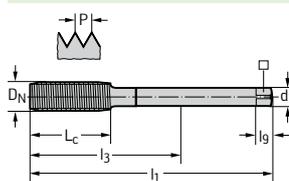

Designation WY80AD	DN	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l ₉ mm	N
TC410-M12-L0-	M 12	1,75	110	23	83	9	7	10	6
TC410-M14-L0-	M 14	2	110	25	81	11	9	12	6
TC410-M16-L0-	M 16	2	110	25	68	12	9	12	6
TC410-M18-L0-	M 18	2,5	125	30	81	14	11	14	7
TC410-M20-L0-	M 20	2,5	140	30	95	16	12	15	7
TC410-M24-L0-	M 24	3	160	36	113	18	14,5	17	8




Ordering example for the grade WY80AD: TC410-M12-L0-WY80AD

HSS-E machine thread formers

TC410 Advance



- For long-chipping materials



$\leq 3 \times D_N$

$D=3,5-5$

36HRC
 1200
 -200
 N/mm²

	P	M	K	N	S	H	O
WY80AD	●●	●	●	●●	●	●	●

DIN 2174		Designation WY80AD	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N
		TC410-M2-CD-	M 2	0,4	45	6	11	2,8	2,1	3
		TC410-M3-CD-	M 3	0,5	56	9	18	3,5	2,7	4
		TC410-M4-CD-	M 4	0,7	63	12	21	4,5	3,4	5
		TC410-M5-CD-	M 5	0,8	70	13	25	6	4,9	5
		TC410-M6-CD-	M 6	1	80	15	30	6	4,9	5
		TC410-M8-CD-	M 8	1,25	90	18	35	8	6,2	5

Ordering example for the grade WY80AD: TC410-M2-CD-WY80AD

C2


WALTER SELECT

●● Primary application ● Other application


Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E machine thread formers

TC410 Advance



- For long-chipping materials



	P	M	K	N	S	H	O
WY80AD	●●	●●	●	●●	●		

DIN 2174	Designation WY80AD	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC410-M3-CL-	M 3	0,5	56	9	18	3,5	2,7	6	4
	TC410-M4-CL-	M 4	0,7	63	12	21	4,5	3,4	6	5
	TC410-M5-CL-	M 5	0,8	70	13	25	6	4,9	8	5
	TC410-M6-CL-	M 6	1	80	15	30	6	4,9	8	5
	TC410-M8-CL-	M 8	1,25	90	18	35	8	6,2	9	5
	TC410-M10-CL-	M 10	1,5	100	20	39	10	8	11	6

Ordering example for the grade WY80AD: TC410-M10-CL-WY80AD

DIN 2174	Designation WY80AD	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC410-M12-LL-	M 12	1,75	110	23	83	9	7	10	6
	TC410-M16-LL-	M 16	2	110	25	68	12	9	12	6

Ordering example for the grade WY80AD: TC410-M12-LL-WY80AD

C2

WALTER SELECT ●● Primary application ● Other application


Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E machine thread formers

TC410 Advance



- For long-chipping materials



	P	M	K	N	S	H	O
WY80AD	●●	●	●	●●	●		

DIN 2174	Designation WY80AD	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC410-M2-E0-	M 2	0,4	45	6	11	2,8	2,1	5	3
	TC410-M2.5-E0-	M 2.5	0,45	50	8	14	2,8	2,1	5	3
	TC410-M3-E0-	M 3	0,5	56	9	18	3,5	2,7	6	4
	TC410-M3.5-E0-	M 3.5	0,6	56	11	20	4	3	6	4
	TC410-M4-E0-	M 4	0,7	63	12	21	4,5	3,4	6	5
	TC410-M5-E0-	M 5	0,8	70	13	25	6	4,9	8	5
	TC410-M6-E0-	M 6	1	80	15	30	6	4,9	8	5
	TC410-M8-E0-	M 8	1,25	90	18	35	8	6,2	9	5
	TC410-M10-E0-	M 10	1,5	100	20	39	10	8	11	6

Ordering example for the grade WY80AD: TC410-M10-E0-WY80AD

DIN 2174	Designation WY80AD	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC410-M12-N0-	M 12	1,75	110	23	83	9	7	10	6


Ordering example for the grade WY80AD: TC410-M12-N0-WY80AD

HSS-E machine thread formers

TC410 Advance




- For long-chipping materials



	P	M	K	N	S	H	O
WY80AD	●●	●	●	●●	●		

DIN 2174

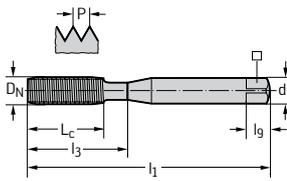

Designation WY80AD	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
TC410-M2-F0-	M 2	0,4	45	6	11	2,8	2,1	5	3
TC410-M2.5-F0-	M 2.5	0,45	50	8	14	2,8	2,1	5	3
TC410-M3-F0-	M 3	0,5	56	9	18	3,5	2,7	6	4
TC410-M4-F0-	M 4	0,7	63	12	21	4,5	3,4	6	5
TC410-M5-F0-	M 5	0,8	70	13	25	6	4,9	8	5
TC410-M6-F0-	M 6	1	80	15	30	6	4,9	8	5
TC410-M8-F0-	M 8	1,25	90	18	35	8	6,2	9	5
TC410-M10-F0-	M 10	1,5	100	20	39	10	8	11	6

Ordering example for the grade WY80AD: TC410-M10-F0-WY80AD


C2

HSS-E machine thread formers

TC410 Advance



- For long-chipping materials



	P	M	K	N	S	H	O
WY80AD	●●	●●	●	●●	●		

DIN 2174	Designation WY80AD	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC410-M2-C6-	M 2	0,4	45	6	11	2,8	2,1	5	3
	TC410-M2.5-C6-	M 2.5	0,45	50	8	13	2,8	2,1	5	3
	TC410-M3-C6-	M 3	0,5	56	9	18	3,5	2,7	6	4
	TC410-M3.5-C6-	M 3.5	0,6	56	11	20	4	3	6	4
	TC410-M4-C6-	M 4	0,7	63	12	21	4,5	3,4	6	5
	TC410-M5-C6-	M 5	0,8	70	13	25	6	4,9	8	5
	TC410-M6-C6-	M 6	1	80	15	30	6	4,9	8	5
	TC410-M7-C6-	M 7	1	80	15	30	7	5,5	8	5
	TC410-M8-C6-	M 8	1,25	90	18	35	8	6,2	9	5
	TC410-M10-C6-	M 10	1,5	100	20	39	10	8	11	6

Ordering example for the grade WY80AD: TC410-M10-C6-WY80AD

DIN 2174	Designation WY80AD	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC410-M12-L6-	M 12	1,75	110	23	83	9	7	10	6
	TC410-M14-L6-	M 14	2	110	25	81	11	9	12	6
	TC410-M16-L6-	M 16	2	110	25	68	12	9	12	6
	TC410-M18-L6-	M 18	2,5	125	30	81	14	11	14	7
	TC410-M20-L6-	M 20	2,5	140	30	95	16	12	15	7
	TC410-M24-L6-	M 24	3	160	36	113	18	14,5	17	8

Ordering example for the grade WY80AD: TC410-M12-L6-WY80AD

WALTER SELECT

●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


C2

HSS-E machine thread formers

TC410 Advance



- For long-chipping materials



	P	M	K	N	S	H	O
WY80AD	●●	●●	●	●●	●		

DIN 2174		Designation WY80AD	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC410-M2-E6-	M 2	0,4	45	6	11	2,8	2,1	5	3	
	TC410-M2.5-E6-	M 2.5	0,45	50	8	14	2,8	2,1	5	3	
	TC410-M3-E6-	M 3	0,5	56	9	18	3,5	2,7	6	4	
	TC410-M3.5-E6-	M 3.5	0,6	56	11	20	4	3	6	4	
	TC410-M4-E6-	M 4	0,7	63	12	21	4,5	3,4	6	5	
	TC410-M5-E6-	M 5	0,8	70	13	25	6	4,9	8	5	
	TC410-M6-E6-	M 6	1	80	15	30	6	4,9	8	5	
	TC410-M8-E6-	M 8	1,25	90	18	35	8	6,2	9	5	
	TC410-M10-E6-	M 10	1,5	100	20	39	10	8	11	6	

Ordering example for the grade WY80AD: TC410-M10-E6-WY80AD

DIN 2174		Designation WY80AD	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC410-M12-N6-	M 12	1,75	110	23	83	9	7	10	6	

Ordering example for the grade WY80AD: TC410-M12-N6-WY80AD

C2

WALTER SELECT

●● Primary application ● Other application


Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E machine thread formers

TC410 Advance



- For long-chipping materials



	P	M	K	N	S	H	O
WY80AD	●●	●●●	●●	●●●	●		

DIN 2174	Designation WY80AD	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC410-M2-F6-	M 2	0,4	45	6	11	2,8	2,1	5	3
	TC410-M2.5-F6-	M 2.5	0,45	50	8	14	2,8	2,1	5	3
	TC410-M3-F6-	M 3	0,5	56	9	18	3,5	2,7	6	4
	TC410-M4-F6-	M 4	0,7	63	12	21	4,5	3,4	6	5
	TC410-M5-F6-	M 5	0,8	70	13	25	6	4,9	8	5
	TC410-M6-F6-	M 6	1	80	15	30	6	4,9	8	5
	TC410-M8-F6-	M 8	1,25	90	18	35	8	6,2	9	5
TC410-M10-F6-	M 10	1,5	100	20	39	10	8	11	6	

Ordering example for the grade WY80AD: TC410-M10-F6-WY80AD

DIN 2174	Designation WY80AD	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC410-M12-P6-	M 12	1,75	110	23	83	9	7	10	6


Ordering example for the grade WY80AD: TC410-M12-P6-WY80AD

HSS-E-PM machine thread formers

TC420 Supreme




- For long-chipping materials



	P	M	K	N	S	H	O
WW60AD	●●	●	●	●●	●		
WW60BA	●●	●	●	●●	●		


DIN 2174

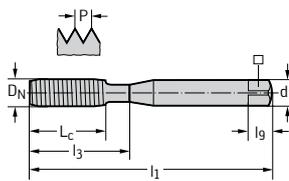

Designation WW60AD	Designation WW60BA	DN	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l ₉ mm	N
TC420-M2-C0-	TC420-M2-C0-	M 2	0,4	45	4	11	2,8	2,1	5	3
TC420-M2.5-C0-	TC420-M2.5-C0-	M 2.5	0,45	50	4	14	2,8	2,1	5	3
TC420-M3-C0-	TC420-M3-C0-	M 3	0,5	56	6	18	3,5	2,7	6	4
TC420-M3.5-C0-	TC420-M3.5-C0-	M 3.5	0,6	56	7	20	4	3	6	4
TC420-M4-C0-	TC420-M4-C0-	M 4	0,7	63	7	21	4,5	3,4	6	5
TC420-M5-C0-	TC420-M5-C0-	M 5	0,8	70	8	25	6	4,9	8	5
TC420-M6-C0-	TC420-M6-C0-	M 6	1	80	10	30	6	4,9	8	5
TC420-M8-C0-	TC420-M8-C0-	M 8	1,25	90	12	35	8	6,2	9	5
TC420-M10-C0-	TC420-M10-C0-	M 10	1,5	100	15	39	10	8	11	6

Ordering example for the grade WW60AD: TC420-M10-C0-WW60AD

DIN 2174

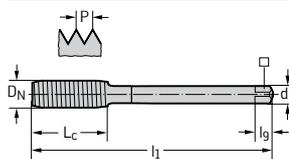

Designation WW60AD	Designation WW60BA	DN	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l ₉ mm	N
TC420-M12-L0-	TC420-M12-L0-	M 12	1,75	110	16	83	9	7	10	6
TC420-M14-L0-	TC420-M14-L0-	M 14	2	110	20	81	11	9	12	6
TC420-M16-L0-	TC420-M16-L0-	M 16	2	110	20	68	12	9	12	6
TC420-M20-L0-		M 20	2,5	140	25	95	16	12	15	7

Ordering example for the grade WW60AD: TC420-M12-L0-WW60AD

C2

WALTER
SELECT


●● Primary application ● Other application
Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E-PM machine thread formers

TC420 Supreme



- For long-chipping materials



	P	M	K	N	S	H	O
WW60AD	●●	●●	●	●●	●		
WW60BA	●●	●●	●	●●	●		

DIN 2174	Designation WW60AD	Designation WW60BA	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N	
	TC420-M5-C1-	TC420-M5-C1-	M 5	0,8	70	8	25	6	4,9	8	5
	TC420-M6-C1-	TC420-M6-C1-	M 6	1	80	10	30	6	4,9	8	5
	TC420-M8-C1-	TC420-M8-C1-	M 8	1,25	90	12	35	8	6,2	9	5
	TC420-M10-C1-	TC420-M10-C1-	M 10	1,5	100	15	39	10	8	11	6

Ordering example for the grade WW60AD: TC420-M10-C1-WW60AD

DIN 2174	Designation WW60AD	Designation WW60BA	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N	
	TC420-M12-L1-	TC420-M12-L1-	M 12	1,75	110	16	83	9	7	10	6
	TC420-M14-L1-	TC420-M14-L1-	M 14	2	110	20	81	11	9	12	6
	TC420-M16-L1-	TC420-M16-L1-	M 16	2	110	20	68	12	9	12	6

Ordering example for the grade WW60AD: TC420-M12-L1-WW60AD

C2

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E-PM machine thread formers

TC420 Supreme




- For long-chipping materials




M
DIN 13

6GX



	P	M	K	N	S	H	O
WW60AD	●●	●	●	●●	●		
WW60BA	●●	●	●	●●	●		


DIN 2174

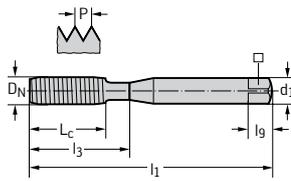

Designation WW60AD	Designation WW60BA	DN	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
TC420-M2-E0-	TC420-M2-E0-	M 2	0,4	45	4	11	2,8	2,1	5	3
TC420-M2.5-E0-	TC420-M2.5-E0-	M 2.5	0,45	50	4	14	2,8	2,1	5	3
TC420-M3-E0-	TC420-M3-E0-	M 3	0,5	56	6	18	3,5	2,7	6	4
TC420-M3.5-E0-		M 3.5	0,6	56	7	20	4	3	6	4
TC420-M4-E0-	TC420-M4-E0-	M 4	0,7	63	7	21	4,5	3,4	6	5
TC420-M5-E0-	TC420-M5-E0-	M 5	0,8	70	8	25	6	4,9	8	5
TC420-M6-E0-	TC420-M6-E0-	M 6	1	80	10	30	6	4,9	8	5
TC420-M8-E0-	TC420-M8-E0-	M 8	1,25	90	12	35	8	6,2	9	5
TC420-M10-E0-	TC420-M10-E0-	M 10	1,5	100	15	39	10	8	11	6

Ordering example for the grade WW60AD: TC420-M10-E0-WW60AD

DIN 2174

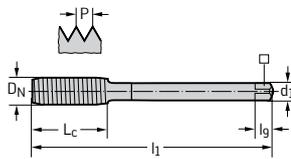

Designation WW60AD	DN	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
TC420-M12-N0-	M 12	1,75	110	16	83	9	7	10	6
TC420-M14-N0-	M 14	2	110	20	81	11	9	12	6
TC420-M16-N0-	M 16	2	110	20	68	12	9	12	6

Ordering example for the grade WW60AD: TC420-M12-N0-WW60AD

C2

WALTER
SELECT


●● Primary application ● Other application
Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E-PM machine thread formers

TC420 Supreme



- For long-chipping materials



	P	M	K	N	S	H	O
WW60AD	●●	●●	●●	●●	●		
WW60BA	●●	●●	●●	●●	●		

DIN 2174		Designation WW60AD	Designation WW60BA	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC420-M5-CF-	TC420-M5-CF-		M 5	0,8	70	8	25	6	4,9	8	5
	TC420-M6-CF-	TC420-M6-CF-		M 6	1	80	10	30	6	4,9	8	5
	TC420-M8-CF-	TC420-M8-CF-		M 8	1,25	90	12	35	8	6,2	9	5
	TC420-M10-CF-	TC420-M10-CF-		M 10	1,5	100	15	39	10	8	11	6

Ordering example for the grade WW60AD: TC420-M10-CF-WW60AD

DIN 2174		Designation WW60AD	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC420-M12-LF-		M 12	1,75	110	16	83	9	7	10	6
	TC420-M16-LF-		M 16	2	110	20	68	12	9	12	6

Ordering example for the grade WW60AD: TC420-M12-LF-WW60AD

C2

WALTER SELECT ●● Primary application ● Other application


Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E-PM machine thread formers

TC420 Supreme



- For long-chipping materials



	P	M	K	N	S	H	O
WW60AD	●●	●●	●	●●	●		
WW60BA	●●	●●	●	●●	●		

DIN 2174	Designation WW60AD	Designation WW60BA	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N	
	TC420-M5-EF-	TC420-M5-EF-	M 5	0,8	70	8	25	6	4,9	8	5
	TC420-M6-EF-	TC420-M6-EF-	M 6	1	80	10	30	6	4,9	8	5
	TC420-M8-EF-	TC420-M8-EF-	M 8	1,25	90	12	35	8	6,2	9	5
	TC420-M10-EF-	TC420-M10-EF-	M 10	1,5	100	15	39	10	8	11	6

Ordering example for the grade WW60AD: TC420-M10-EF-WW60AD

DIN 2174	Designation WW60AD	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N	
	TC420-M12-NF-	M 12	1,75	110	16	83	9	7	10	6
	TC420-M16-NF-	M 16	2	110	20	68	12	9	12	6

Ordering example for the grade WW60AD: TC420-M12-NF-WW60AD

C2

**WALTER
SELECT**

●● Primary application ● Other application
Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E-PM machine thread formers

TC420 Supreme



- For long-chipping materials

$\leq 3,5 \times D_N$

C=2-3

36HRC
1200-200 N/mm²

M
DIN 13

6HX

	P	M	K	N	S	H	O
WW60AD	●●	●●	●	●●	●		
WW60BA	●●	●●	●	●●	●		

DIN 2174		Designation WW60AD	Designation WW60BA	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC420-M2-C6-	TC420-M2-C6-	M 2	0,4	45	4	11	2,8	2,1	5	3	
	TC420-M2.5-C6-	TC420-M2.5-C6-	M 2.5	0,45	50	4	14	2,8	2,1	5	3	
	TC420-M3-C6-	TC420-M3-C6-	M 3	0,5	56	6	18	3,5	2,7	6	4	
	TC420-M3.5-C6-	TC420-M3.5-C6-	M 3.5	0,6	56	7	20	4	3	6	4	
	TC420-M4-C6-	TC420-M4-C6-	M 4	0,7	63	7	21	4,5	3,4	6	5	
	TC420-M5-C6-	TC420-M5-C6-	M 5	0,8	70	8	25	6	4,9	8	5	
	TC420-M6-C6-	TC420-M6-C6-	M 6	1	80	10	30	6	4,9	8	5	
	TC420-M8-C6-	TC420-M8-C6-	M 8	1,25	90	12	35	8	6,2	9	5	
	TC420-M10-C6-	TC420-M10-C6-	M 10	1,5	100	15	39	10	8	11	6	

Ordering example for the grade WW60AD: TC420-M10-C6-WW60AD

DIN 2174		Designation WW60AD	Designation WW60BA	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC420-M12-L6-	TC420-M12-L6-	M 12	1,75	110	16	83	9	7	10	6	
	TC420-M14-L6-	TC420-M14-L6-	M 14	2	110	20	81	11	9	12	6	
	TC420-M16-L6-	TC420-M16-L6-	M 16	2	110	20	68	12	9	12	6	
	TC420-M20-L6-	TC420-M20-L6-	M 20	2,5	140	25	95	16	12	15	7	


Ordering example for the grade WW60AD: TC420-M12-L6-WW60AD

HSS-E-PM machine thread formers

TC420 Supreme



- For long-chipping materials



	P	M	K	N	S	H	O
WW60AD	●●	●●	●	●●	●		

~DIN 371 XL		Designation WW60AD	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC420-M3-CH-	M 3	0,5	125	6	18	3,5	2,7	6	4	
	TC420-M4-CH-	M 4	0,7	125	7	21	4,5	3,4	6	5	
	TC420-M5-CH-	M 5	0,8	140	8	25	6	4,9	8	5	
	TC420-M6-CH-	M 6	1	160	10	30	6	4,9	8	5	

Ordering example for the grade WW60AD: TC420-M3-CH-WW60AD

~DIN 376 XL		Designation WW60AD	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC420-M8-LH-	M 8	1,25	180	13	157	6	4,9	8	5	
	TC420-M10-LH-	M 10	1,5	200	15	177	7	5,5	8	6	
	TC420-M12-LH-	M 12	1,75	220	16	193	9	7	10	6	
	TC420-M16-LH-	M 16	2	220	20	178	12	9	12	6	

Ordering example for the grade WW60AD: TC420-M10-LH-WW60AD

C2

WALTER SELECT

●● Primary application ● Other application




Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E-PM machine thread formers

TC420 Supreme



- For long-chipping materials



	P	M	K	N	S	H	O
WW60AD	●●	●●	●	●●	●		
WW60BA	●●	●●	●	●●	●		

DIN 2174	Designation WW60AD	Designation WW60BA	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N	
	TC420-M5-C2-	TC420-M5-C2-	M 5	0,8	70	8	25	6	4,9	8	5
	TC420-M6-C2-	TC420-M6-C2-	M 6	1	80	10	30	6	4,9	8	5
	TC420-M8-C2-	TC420-M8-C2-	M 8	1,25	90	12	35	8	6,2	9	5
	TC420-M10-C2-	TC420-M10-C2-	M 10	1,5	100	15	39	10	8	11	6

Ordering example for the grade WW60AD: TC420-M10-C2-WW60AD

DIN 2174	Designation WW60AD	Designation WW60BA	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N	
	TC420-M12-L2-	TC420-M12-L2-	M 12	1,75	110	16	83	9	7	10	6
	TC420-M14-L2-	TC420-M14-L2-	M 14	2	110	20	81	11	9	12	6
	TC420-M16-L2-	TC420-M16-L2-	M 16	2	110	20	68	12	9	12	6
	TC420-M20-L2-	TC420-M20-L2-	M 20	2,5	140	25	95	16	12	15	7
	TC420-M24-L2-	TC420-M24-L2-	M 24	3	160	30	113	18	14,5	17	8

Ordering example for the grade WW60AD: TC420-M12-L2-WW60AD

HSS-E-PM machine thread formers

TC420 Supreme



$\leq 3,5 \times D_N$


- For long-chipping materials

M
DIN 13

6HX

	P	M	K	N	S	H	O
WW60AD	●●	●●	●	●●	●		
WW60BA	●●	●●	●	●●	●		


DIN 2174

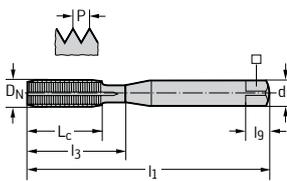

Designation WW60AD	Designation WW60BA	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_9 mm	N	
TC420-M2-CE-	TC420-M2-CE-	M 2	0,4	45	4	11	2,8	2,1	5	3
TC420-M2.5-CE-	TC420-M2.5-CE-	M 2.5	0,45	50	4	14	2,8	2,1	5	3
TC420-M3-CE-	TC420-M3-CE-	M 3	0,5	56	6	18	3,5	2,7	6	4
TC420-M3.5-CE-		M 3.5	0,6	56	7	20	4	3	6	4
TC420-M4-CE-	TC420-M4-CE-	M 4	0,7	63	7	21	4,5	3,4	6	5
TC420-M5-CE-	TC420-M5-CE-	M 5	0,8	70	8	25	6	4,9	8	5
TC420-M6-CE-	TC420-M6-CE-	M 6	1	80	10	30	6	4,9	8	5
TC420-M8-CE-	TC420-M8-CE-	M 8	1,25	90	12	35	8	6,2	9	5
TC420-M10-CE-	TC420-M10-CE-	M 10	1,5	100	15	39	10	8	11	6

Ordering example for the grade WW60AD: TC420-M10-CE-WW60AD

DIN 2174

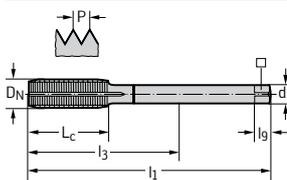

Designation WW60AD	Designation WW60BA	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_9 mm	N	
TC420-M12-LE-	TC420-M12-LE-	M 12	1,75	110	16	83	9	7	10	6
TC420-M14-LE-		M 14	2	110	20	81	11	9	12	6
TC420-M16-LE-	TC420-M16-LE-	M 16	2	110	20	68	12	9	12	6

Ordering example for the grade WW60AD: TC420-M12-LE-WW60AD

C2

HSS-E-PM machine thread formers

TC420 Supreme



- For long-chipping materials

$\leq 3,5 \times D_N$


$C=2-3$

36HRC
 1200
 -200
 N/mm²

M

DIN 13

6GX



	P	M	K	N	S	H	O
WW60AD	●●	●●	●	●●	●		
WW60BA	●●	●●	●	●●	●		

DIN 2174	Designation WW60AD	Designation WW60BA	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	\square	l_g mm	N
	TC420-M2-E6-	TC420-M2-E6-	M 2	0,4	45	4	11	2,8	2,1	5	3
	TC420-M2.5-E6-	TC420-M2.5-E6-	M 2.5	0,45	50	4	14	2,8	2,1	5	3
	TC420-M3-E6-	TC420-M3-E6-	M 3	0,5	56	6	18	3,5	2,7	6	4
	TC420-M3.5-E6-	TC420-M3.5-E6-	M 3.5	0,6	56	7	20	4	3	6	4
	TC420-M4-E6-	TC420-M4-E6-	M 4	0,7	63	7	21	4,5	3,4	6	5
	TC420-M5-E6-	TC420-M5-E6-	M 5	0,8	70	8	25	6	4,9	8	5
	TC420-M6-E6-	TC420-M6-E6-	M 6	1	80	10	30	6	4,9	8	5
	TC420-M8-E6-	TC420-M8-E6-	M 8	1,25	90	12	35	8	6,2	9	5
	TC420-M10-E6-	TC420-M10-E6-	M 10	1,5	100	15	39	10	8	11	6

Ordering example for the grade WW60AD: TC420-M10-E6-WW60AD

DIN 2174	Designation WW60AD	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	\square	l_g mm	N
	TC420-M12-N6-	M 12	1,75	110	16	83	9	7	10	6
	TC420-M14-N6-	M 14	2	110	20	81	11	9	12	6
	TC420-M16-N6-	M 16	2	110	20	68	12	9	12	6


Ordering example for the grade WW60AD: TC420-M12-N6-WW60AD

HSS-E-PM machine thread formers

TC420 Supreme




- For long-chipping materials



	P	M	K	N	S	H	O
WW60AD	●●	●●	●	●●	●		
WW60BA	●●	●●	●	●●	●		


DIN 2174

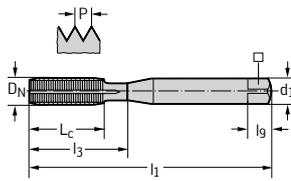

Designation WW60AD	Designation WW60BA	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N	
TC420-M2-EE-	TC420-M2-EE-	M 2	0,4	45	4	11	2,8	2,1	5	3
TC420-M2.5-EE-	TC420-M2.5-EE-	M 2.5	0,45	50	4	14	2,8	2,1	5	3
TC420-M3-EE-	TC420-M3-EE-	M 3	0,5	56	6	18	3,5	2,7	6	4
TC420-M4-EE-	TC420-M4-EE-	M 4	0,7	63	7	21	4,5	3,4	6	5
TC420-M5-EE-	TC420-M5-EE-	M 5	0,8	70	8	25	6	4,9	8	5
TC420-M6-EE-	TC420-M6-EE-	M 6	1	80	10	30	6	4,9	8	5
TC420-M8-EE-	TC420-M8-EE-	M 8	1,25	90	12	35	8	6,2	9	5
TC420-M10-EE-	TC420-M10-EE-	M 10	1,5	100	15	39	10	8	11	6

Ordering example for the grade WW60AD: TC420-M10-EE-WW60AD

DIN 2174

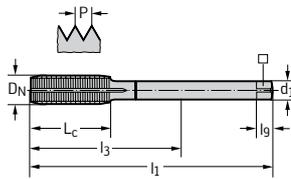

Designation WW60AD	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N	
TC420-M12-NE-	M 12	1,75	110	16	83	9	7	10	6
TC420-M14-NE-	M 14	2	110	20	81	11	9	12	6
TC420-M16-NE-	M 16	2	110	20	68	12	9	12	6

Ordering example for the grade WW60AD: TC420-M12-NE-WW60AD

C2

HSS-E-PM machine thread formers

TC430 Supreme



- For long-chipping materials
- ISO M only with oil

\leq
3×D_N

C=2-3

36HRC
 1200
 -200
 N/mm²

M
DIN 13

6HX

	P	M	K	N	S	H	O
WW60EL	●●	●	●	●			

DIN 2174	Designation WW60EL	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC430-M3-C0-	M 3	0,5	56	6	18	3,5	2,7	6	4
	TC430-M4-C0-	M 4	0,7	63	7	21	4,5	3,4	6	5
	TC430-M5-C0-	M 5	0,8	70	8	25	6	4,9	8	5
	TC430-M6-C0-	M 6	1	80	10	30	6	4,9	8	5
	TC430-M8-C0-	M 8	1,25	90	12	35	8	6,2	9	6
	TC430-M10-C0-	M 10	1,5	100	15	39	10	8	11	7

Ordering example for the grade WW60EL: TC430-M10-C0-WW60EL

C2

WALTER SELECT

●● Primary application ● Other application



Best tool for → Good = 😊 → Average = 😐 → Poor = ☹️ machining conditions

HSS-E-PM machine thread formers

TC430 Supreme




- For long-chipping materials
- ISO M only with oil

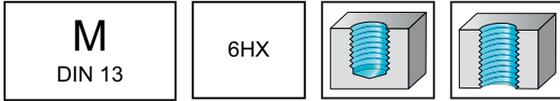

	P	M	K	N	S	H	O
WW60AD	●●	●	●	●			
WW60EL	●●	●	●	●			


DIN 2174

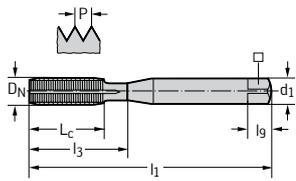

Designation WW60AD	Designation WW60EL	DN	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l ₉ mm	N
	TC430-M3-C6-	M 3	0,5	56	6	18	3,5	2,7	6	4
	TC430-M4-C6-	M 4	0,7	63	7	21	4,5	3,4	6	5
	TC430-M5-C6-	M 5	0,8	70	8	25	6	4,9	8	5
	TC430-M6-C6-	M 6	1	80	10	30	6	4,9	8	5
TC430-M8-C6-	TC430-M8-C6-	M 8	1,25	90	12	35	8	6,2	9	6
TC430-M10-C6-	TC430-M10-C6-	M 10	1,5	100	15	39	10	8	11	7

Ordering example for the grade WW60AD: TC430-M10-C6-WW60AD

DIN 2174

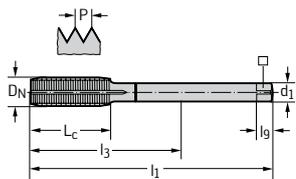

Designation WW60AD	Designation WW60EL	DN	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l ₉ mm	N
TC430-M12-L6-	TC430-M12-L6-	M 12	1,75	110	16	83	9	7	10	8
TC430-M16-L6-		M 16	2	110	20	68	12	9	12	8

Ordering example for the grade WW60AD: TC430-M12-L6-WW60AD

C2

**WALTER
SELECT**

●● Primary application ● Other application
Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E-PM machine thread formers

TC430 Supreme



- For long-chipping materials
- ISO M only with oil

$\leq 3,5 \times D_N$

$C=2-3$

36HRC
1200
-200
N/mm ²

M
DIN 13

6HX

	P	M	K	N	S	H	O
WW60AD	●●	●	●	●			
WW60EL	●●	●	●	●			

DIN 2174		Designation WW60AD	Designation WW60EL	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N	
			TC430-M5-C1-	M 5	0,8	70	8	25	6	4,9	8	5
			TC430-M6-C1-	M 6	1	80	10	30	6	4,9	8	5
			TC430-M8-C1-	M 8	1,25	90	12	35	8	6,2	9	6
			TC430-M10-C1-	M 10	1,5	100	15	39	10	8	11	7

Ordering example for the grade WW60AD: TC430-M10-C1-WW60AD

DIN 2174		Designation WW60AD	Designation WW60EL	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N	
		TC430-M12-L1-	TC430-M12-L1-	M 12	1,75	110	16	83	9	7	10	8
		TC430-M16-L1-	TC430-M16-L1-	M 16	2	110	20	68	12	9	12	8

Ordering example for the grade WW60AD: TC430-M12-L1-WW60AD

C2

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E-PM machine thread formers

TC430 Supreme



- For long-chipping materials
- ISO M only with oil

$\leq 3,5 \times D_N$

$C=2-3$

36HRC
1200
~200
N/mm²

M
DIN 13

6HX

	P	M	K	N	S	H	O
WW60AD	●●	●	●	●			
WW60EL	●●	●	●	●			

DIN 2174		Designation WW60AD	Designation WW60EL	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N		
			TC430-M5-C2-	M 5	0,8	70	8	25	6	4,9	8	5	
			TC430-M6-C2-	M 6	1	80	10	30	6	4,9	8	5	
			TC430-M8-C2-	TC430-M8-C2-	M 8	1,25	90	12	35	8	6,2	9	6
			TC430-M10-C2-	TC430-M10-C2-	M 10	1,5	100	15	39	10	8	11	7

Ordering example for the grade WW60AD: TC430-M10-C2-WW60AD

DIN 2174		Designation WW60AD	Designation WW60EL	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N	
		TC430-M12-L2-	TC430-M12-L2-	M 12	1,75	110	16	83	9	7	10	8
		TC430-M16-L2-	TC430-M16-L2-	M 16	2	110	20	68	12	9	12	8

Ordering example for the grade WW60AD: TC430-M12-L2-WW60AD

C2

WALTER
SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E-PM machine thread formers

TC430 Supreme



- For long-chipping materials
- ISO M only with oil

$\leq 3,5 \times D_N$

$C=2-3$

36HRC
 1200
 -200
 N/mm²

M
DIN 13

6GX

	P	M	K	N	S	H	O
WW60AD	●●	●	●	●			

DIN 2174	Designation WW60AD	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC430-M8-E6-	M 8	1,25	90	12	35	8	6,2	9	6
	TC430-M10-E6-	M 10	1,5	100	15	39	10	8	11	7

Ordering example for the grade WW60AD: TC430-M10-E6-WW60AD

DIN 2174	Designation WW60AD	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC430-M12-N6-	M 12	1,75	110	16	83	9	7	10	8
	TC430-M16-N6-	M 16	2	110	20	68	12	9	12	8

Ordering example for the grade WW60AD: TC430-M12-N6-WW60AD

C2

WALTER SELECT

●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E machine thread formers

TC440 Supreme



- For long-chipping materials
- For stainless steels when using emulsion

$\leq 3,5 \times D_N$

$C=2-3$

$32HRC$
1000-200 N/mm²

M
DIN 13

6HX

	P	M	K	N	S	H	O
WY80AD	●	●●	●	●	●	●	●

DIN 2174		Designation WY80AD	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N	
		TC440-M2-C6-	M 2	0,4	45	6	6	2,8	2,1	5	3
		TC440-M2.5-C6-	M 2.5	0,45	50	8	8	2,8	2,1	5	3
		TC440-M3-C6-	M 3	0,5	56	6	18	3,5	2,7	6	3
		TC440-M4-C6-	M 4	0,7	63	7	21	4,5	3,4	6	3
		TC440-M5-C6-	M 5	0,8	70	8	25	6	4,9	8	4
		TC440-M6-C6-	M 6	1	80	10	30	6	4,9	8	5
		TC440-M8-C6-	M 8	1,25	90	12	35	8	6,2	9	5
	TC440-M10-C6-	M 10	1,5	100	15	39	10	8	11	5	

Ordering example for the grade WY80AD: TC440-M12-L6-WY80AD

DIN 2174		Designation WY80AD	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h9 mm	l_g mm	N	
		TC440-M12-L6-	M 12	1,75	110	16	83	9	7	10	5

Bestellbeispiel für die Sorte WY80AD: TC440-M12-L6-WY80AD

C2

WALTER
SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = ☹️ machining conditions

HSS-E machine thread formers

TC440 Supreme



- For long-chipping materials
- For stainless steels when using emulsion

M
DIN 13

6HX

$\leq 3,5 \times D_N$

$C=2-3$

32HRC
1000
-200
N/mm²

	P	M	K	N	S	H	O
WY80AD	●	●●		●	●		

DIN 2174	Designation WY80AD	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC440-M5-C1-	M 5	0,8	70	8	25	6	4,9	8	4
	TC440-M6-C1-	M 6	1	80	10	30	6	4,9	8	5
	TC440-M8-C1-	M 8	1,25	90	12	35	8	6,2	9	5
	TC440-M10-C1-	M 10	1,5	100	15	39	10	8	11	5

Ordering example for the grade WY80AD: TC440-M10-C1-WY80AD

DIN 2174	Designation WY80AD	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC440-M12-L1-	M 12	1,75	110	16	83	9	7	10	5

Ordering example for the grade WY80AD: TC440-M12-L1-WY80AD

HSS-E machine thread formers

TC440 Supreme



- For long-chipping materials
- For stainless steels when using emulsion



	P	M	K	N	S	H	O
WY80AD	●	●●	●	●	●	●	●

DIN 2174	Designation WY80AD	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC440-M5-C2-	M 5	0,8	70	8	25	6	4,9	8	4
	TC440-M6-C2-	M 6	1	80	10	30	6	4,9	8	5
	TC440-M8-C2-	M 8	1,25	90	12	35	8	6,2	9	5
	TC440-M10-C2-	M 10	1,5	100	15	39	10	8	11	5

Ordering example for the grade WY80AD: TC440-M10-C2-WY80AD

DIN 2174	Designation WY80AD	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h9 mm	□	l _g mm	N
	TC440-M12-L2-	M 12	1,75	110	16	83	9	7	10	5

Ordering example for the grade WY80AD: TC440-M12-L2-WY80AD

C2

WALTER SELECT

●● Primary application ● Other application





Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

Solid carbide machine thread formers

TC470 Supreme



- For long-chipping materials



	P	M	K	N	S	H	O
WG20EL	●●		●	●			

DIN 2174		Designation WG20EL	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h6 mm	□	l _g mm	N
		TC470-M3-C0-	M 3	0,5	56	10	10	3,5	2,7	6	4
		TC470-M4-C0-	M 4	0,7	63	13	13	4,5	3,4	6	5
		TC470-M5-C0-	M 5	0,8	70	16	16	6	4,9	8	5
		TC470-M6-C0-	M 6	1	80	10	30	6	4,9	8	5
		TC470-M8-C0-	M 8	1,25	90	12	35	8	6,2	9	6
		TC470-M10-C0-	M 10	1,5	100	15	39	10	8	11	7

Ordering example for the grade WG20EL: TC470-M10-C0-WG20EL

C2


●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

Solid carbide machine thread formers

TC470 Supreme



- For long-chipping materials



	P	M	K	N	S	H	O
WG20EL	●●		●	●			

DIN 2174		Designation WG20EL	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h6 mm	□	l _g mm	N
		TC470-M4-C6-	M 4	0,7	63	13	13	4,5	3,4	6	5
		TC470-M5-C6-	M 5	0,8	70	16	16	6	4,9	8	5
		TC470-M6-C6-	M 6	1	80	10	30	6	4,9	8	5
		TC470-M8-C6-	M 8	1,25	90	12	35	8	6,2	9	6
		TC470-M10-C6-	M 10	1,5	100	15	39	10	8	11	7

Ordering example for the grade WG20EL: TC470-M10-C6-WG20EL

C2

Solid carbide machine thread formers

TC470 Supreme



- For long-chipping materials

M
DIN 13

6HX

$\leq 3,5 \times D_N$

$C=2-3$

36HRC
1200
-200
N/mm²

	P	M	K	N	S	H	O
WG20EL	●●		●	●			

DIN 2174	Designation WG20EL	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	d ₁ h6 mm	□	l _g mm	N
	TC470-M5-C5-	M 5	0,8	70	16	16	6	4,9	8	5
	TC470-M6-C5-	M 6	1	80	10	30	6	4,9	8	5
	TC470-M8-C5-	M 8	1,25	90	12	35	8	6,2	9	6
	TC470-M10-C5-	M 10	1,5	100	15	39	10	8	11	7

Ordering example for the grade WG20EL: TC470-M10-C5-WG20EL

C2

WALTER SELECT


●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

Solid carbide machine thread formers

TC470 Supreme



- For long-chipping materials



	P	M	K	N	S	H	O
WG20EL	●●		●	●			

DIN 2174		Designation WG20EL	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h6 mm	l_g mm	N
	TC470-M5-CE-	M 5	0,8	70	16	16	6	4,9	8	5
	TC470-M6-CE-	M 6	1	80	10	30	6	4,9	8	5
	TC470-M8-CE-	M 8	1,25	90	12	35	8	6,2	9	6
	TC470-M10-CE-	M 10	1,5	100	15	39	10	8	11	7

Ordering example for the grade WG20EL: TC470-M10-CE-WG20EL


C2

Solid carbide machine thread formers

TC470 Supreme



- For long-chipping materials



	P	M	K	N	S	H	O
WG20EL	●●		●	●			

DIN 2174	Designation WG20EL	D_N	P mm	l_1 mm	L_c mm	l_3 mm	d_1 h6 mm	l_g mm	N	
	TC470-M6-C2-	M 6	1	80	10	30	6	4,9	8	5
	TC470-M8-C2-	M 8	1,25	90	12	35	8	6,2	9	6
	TC470-M10-C2-	M 10	1,5	100	15	39	10	8	11	7

Ordering example for the grade WG20EL: TC470-M10-C2-WG20EL

C2

WALTER SELECT


 ●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E machine thread formers

TC410 Advance



- For long-chipping materials



	P	M	K	N	S	H	O
WY80AD	●●	●●	●	●●	●		

DIN 2174											WY80AD
Designation	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	h ₉	□	l _g mm	N		
TC410-M4X0.5-C6-	MF 4x0.5	0,5	63	12	21	4,5	3,4	6	5	●●	
TC410-M5X0.5-C6-	MF 5x0.5	0,5	70	13	25	6	4,9	8	5	●●	
TC410-M6X0.5-C6-	MF 6x0.5	0,5	80	15	30	6	4,9	8	5	●●	
TC410-M6X0.75-C6-	MF 6x0.75	0,75	80	15	30	6	4,9	8	5	●●	
TC410-M7X0.75-C6-	MF 7x0.75	0,75	80	15	30	7	5,5	8	5	●●	

Ordering example for the grade WY80AD: TC410-M4X0.5-C6-WY80AD

C2

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E machine thread formers


TC410 Advance



- For long-chipping materials

MF
DIN 13

6HX




$\leq 3,5 \times DN$

$C=2-3$

36HRC
1200
-200
N/mm²

	P	M	K	N	S	H	O
WY80AD	●●	●●	●	●●	●	●	●

DIN 2174

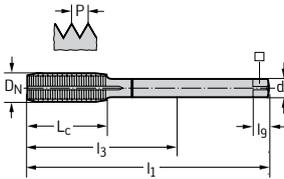

Designation	DN	P mm	l ₁ mm	L _c mm	l ₃ mm	h ₉	□	l ₉ mm	N	WY80AD
TC410-M8X0.5-L6-	MF 8x0.5	0,5	80	15	57	6	4,9	8	5	☹
TC410-M8X0.75-L6-	MF 8x0.75	0,75	80	15	57	6	4,9	8	5	☹
TC410-M8X1-L6-	MF 8x1	1	90	18	67	6	4,9	8	5	☹
TC410-M10X1-L6-	MF 10x1	1	90	20	67	7	5,5	8	6	☹
TC410-M10X1.25-L6-	MF 10x1.25	1,25	100	20	77	7	5,5	8	6	☹
TC410-M12X1-L6-	MF 12x1	1	100	21	73	9	7	10	6	☹
TC410-M12X1.25-L6-	MF 12x1.25	1,25	100	21	73	9	7	10	6	☹
TC410-M12X1.5-L6-	MF 12x1.5	1,5	100	21	73	9	7	10	6	☹
TC410-M14X1.5-L6-	MF 14x1.5	1,5	100	21	71	11	9	12	6	☹
TC410-M16X1.5-L6-	MF 16x1.5	1,5	100	21	58	12	9	12	6	☹
TC410-M18X1.5-L6-	MF 18x1.5	1,5	110	24	66	14	11	14	7	☹
TC410-M20X1.5-L6-	MF 20x1.5	1,5	125	24	80	16	12	15	7	☹
TC410-M20X2-L6-	MF 20x2	2	140	30	95	16	12	15	7	☹
TC410-M22X1.5-L6-	MF 22x1.5	1,5	125	24	78	18	14,5	17	7	☹
TC410-M24X1.5-L6-	MF 24x1.5	1,5	140	26	93	18	14,5	17	8	☹
TC410-M24X2-L6-	MF 24x2	2	140	26	93	18	14,5	17	8	☹
TC410-M27X1.5-L6-	MF 27x1.5	1,5	140	26	77	20	16	19	8	☹
TC410-M27X2-L6-	MF 27x2	2	140	26	77	20	16	19	8	☹
TC410-M30X1.5-L6-	MF 30x1.5	1,5	150	26	85	22	18	21	8	☹
TC410-M30X2-L6-	MF 30x2	2	150	26	85	22	18	21	8	☹

Ordering example for the grade WY80AD: TC410-M10X1-L6-WY80AD

WALTER SELECT

●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = ☹ machining conditions


C2

HSS-E machine thread formers

TC410 Advance




- For long-chipping materials



	P	M	K	N	S	H	O
WY80AD	●●	●	●	●●	●		

DIN 2174											WY80AD
Designation	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	h ₉	□	l ₉ mm	N		
TC410-M10X1-NE-	MF 10x1	1	90	20	67	7	5,5	8	6	☹	
TC410-M12X1.5-NE-	MF 12x1.5	1,5	100	21	73	9	7	10	6	☹	
TC410-M14X1.5-NE-	MF 14x1.5	1,5	100	21	71	11	9	12	7	☹	
TC410-M16X1.5-NE-	MF 16x1.5	1,5	100	21	58	12	9	12	7	☹	

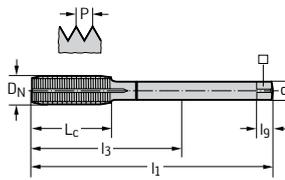

Ordering example for the grade WY80AD: TC410-M10X1-NE-WY80AD

C2

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = ☹ machining conditions

HSS-E-PM machine thread formers

TC420 Supreme



- For long-chipping materials

MF
DIN 13

6HX

$\leq 3,5 \times D_N$

$C=2-3$

36HRC
1200
-200
N/mm²

	P	M	K	N	S	H	O
WW60AD	●●	●●	●	●●	●		

DIN 2174											WW60AD
	Designation	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	h ₉	□	l ₉ mm	N	
	TC420-M8X1-L1-	MF 8x1	1	90	12	67	6	4,9	8	5	●●
	TC420-M10X1-L1-	MF 10x1	1	90	12	67	7	5,5	8	6	●●
	TC420-M12X1.5-L1-	MF 12x1.5	1,5	100	13	73	9	7	10	6	●●
	TC420-M14X1.5-L1-	MF 14x1.5	1,5	100	15	71	11	9	12	6	●●

Ordering example for the grade WW60AD: TC420-M10X1-L1-WW60AD

C2

WALTER SELECT



●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E-PM machine thread formers

TC420 Supreme




- For long-chipping materials

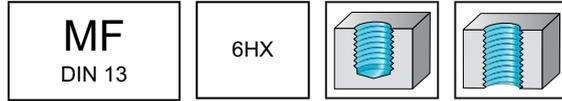

	P	M	K	N	S	H	O
WW60AD	●●	●●	●	●●	●		
WW60BA	●●	●●	●	●●	●		

DIN 2174

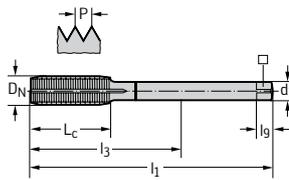

Designation	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	h ₉	□	l ₉ mm	N	WW60AD	WW60BA
TC420-M8X1-L6-	MF 8x1	1	90	12	67	6	4,9	8	5	●●	●●
TC420-M10X1-L6-	MF 10x1	1	90	12	67	7	5,5	8	6	●●	●●
TC420-M12X1-L6-	MF 12x1	1	100	13	73	9	7	10	6	●●	●●
TC420-M12X1.5-L6-	MF 12x1.5	1,5	100	13	73	9	7	10	6	●●	●●
TC420-M14X1-L6-	MF 14x1	1	100	15	71	11	9	12	6	●●	●●
TC420-M14X1.25-L6-	MF 14x1.25	1,25	100	15	71	11	9	12	6	●●	
TC420-M14X1.5-L6-	MF 14x1.5	1,5	100	15	71	11	9	12	6	●●	●●
TC420-M16X1.5-L6-	MF 16x1.5	1,5	100	15	58	12	9	12	6	●●	●●

Ordering example for the grade WW60AD: TC420-M10X1-L6-WW60AD

C2

HSS-E-PM machine thread formers

TC420 Supreme



- For long-chipping materials


$\leq 3,5 \times D_N$

$C=2-3$

36HRC
1200
-200
N/mm ²


MF
DIN 13

6HX



	P	M	K	N	S	H	O
WW60AD	●●	●●	●	●●	●		
WW60BA	●●	●●	●	●●	●		

DIN 2174

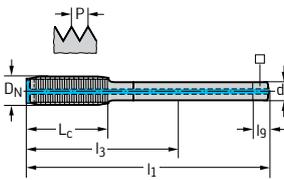

Designation	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	h ₉	□	l _g mm	N	WW60AD	WW60BA
TC420-M8X1-L2-	MF 8x1	1	90	12	67	6	4,9	8	5	●●	●●
TC420-M10X1-L2-	MF 10x1	1	90	12	67	7	5,5	8	6	●●	●●
TC420-M12X1-L2-	MF 12x1	1	100	13	73	9	7	10	6	●●	●●
TC420-M12X1.5-L2-	MF 12x1.5	1,5	100	13	73	9	7	10	6	●●	●●
TC420-M14X1.5-L2-	MF 14x1.5	1,5	100	15	71	11	9	12	6	●●	●●
TC420-M16X1.5-L2-	MF 16x1.5	1,5	100	15	58	12	9	12	6	●●	●●


Ordering example for the grade WW60AD: TC420-M10X1-L2-WW60AD

HSS-E-PM machine thread formers

TC420 Supreme




- For long-chipping materials



	P	M	K	N	S	H	O
WW60AD	●●	●●	●	●●	●		
WW60BA	●●	●●	●	●●	●		

DIN 2174

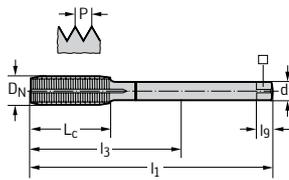

Designation	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	h ₉	□	l ₉ mm	N	WW60AD	WW60BA
TC420-M8X1-N6-	MF 8x1	1	90	12	67	6	4,9	8	5	●●	●●
TC420-M10X1-N6-	MF 10x1	1	90	12	67	7	5,5	8	6	●●	●●
TC420-M12X1-N6-	MF 12x1	1	100	13	73	9	7	10	6	●●	●●
TC420-M12X1.5-N6-	MF 12x1.5	1.5	100	13	73	9	7	10	6	●●	
TC420-M14X1.5-N6-	MF 14x1.5	1.5	100	15	71	11	9	12	6	●●	●●
TC420-M16X1.5-N6-	MF 16x1.5	1.5	100	15	58	12	9	12	6	●●	●●

Ordering example for the grade WW60AD: TC420-M10X1-N6-WW60AD

C2

HSS-E-PM machine thread formers

TC430 Supreme



- For long-chipping materials
- ISO M only with oil


\leq
3,5×D_N

C=2-3

36HRC
 1200
 -200
 N/mm²


MF
DIN 13

6HX



	P	M	K	N	S	H	O
WW60EL	●●	●	●	●			
WW60AD	●●	●	●	●			

DIN 2174

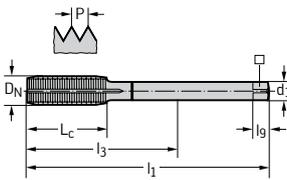

Designation	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	h ₉	□	l ₉ mm	N	WW60EL	WW60AD
TC430-M8X1-L6-	MF 8x1	1	90	12	67	6	4,9	8	6	●●	●●
TC430-M10X1-L6-	MF 10x1	1	90	12	67	7	5,5	8	7	●●	
TC430-M10X1.25-L6-	MF 10x1.25	1,25	100	15	77	7	5,5	8	7	●●	●●
TC430-M12X1.25-L6-	MF 12x1.25	1,25	100	13	73	9	7	10	8	●●	●●
TC430-M12X1.5-L6-	MF 12x1.5	1,5	100	13	73	9	7	10	8	●●	●●
TC430-M14X1.5-L6-	MF 14x1.5	1,5	100	15	71	11	9	12	8	●●	●●
TC430-M16X1.5-L6-	MF 16x1.5	1,5	100	15	58	12	9	12	8	●●	●●

Ordering example for the grade WW60EL: TC430-M10X1-L6-WW60EL


C2

HSS-E-PM machine thread formers

TC430 Supreme




- For long-chipping materials
- ISO M only with oil



	P	M	K	N	S	H	O
WW60EL	●●	●	●	●			
WW60AD	●●	●	●	●			

DIN 2174

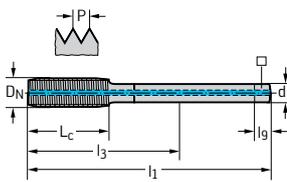

Designation	D_N	P mm	l_1 mm	L_c mm	l_3 mm	h9	\square	l_g mm	N	WW60EL	WW60AD
TC430-M8X1-L1-	MF 8x1	1	90	12	67	6	4,9	8	6	●●	
TC430-M10X1-L1-	MF 10x1	1	90	12	67	7	5,5	8	7	●●	
TC430-M10X1.25-L1-	MF 10x1.25	1,25	100	15	77	7	5,5	8	7	●●	●●
TC430-M12X1-L1-	MF 12x1	1	100	13	73	9	7	10	8	●●	
TC430-M12X1.25-L1-	MF 12x1.25	1,25	100	13	73	9	7	10	8	●●	●●
TC430-M12X1.5-L1-	MF 12x1.5	1,5	100	13	73	9	7	10	8	●●	●●
TC430-M14X1.5-L1-	MF 14x1.5	1,5	100	15	71	11	9	12	8	●●	●●
TC430-M16X1.5-L1-	MF 16x1.5	1,5	100	15	58	12	9	12	8	●●	●●

Ordering example for the grade WW60EL: TC430-M10X1-L1-WW60EL

C2

HSS-E-PM machine thread formers

TC430 Supreme



- For long-chipping materials
- ISO M only with oil

\leq
 $3,5 \times D_N$

$C=2-3$


36HRC
 1200
 -200
 N/mm²

MF
 DIN 13

6HX

	P	M	K	N	S	H	O
WW60AD	●●	●	●	●			
WW60EL	●●	●	●	●			

DIN 2174

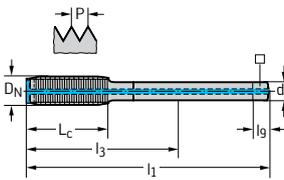

Designation	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	h ₉	□	l ₉ mm	N	WW60AD	WW60EL
TC430-M8X1-L2-	MF 8x1	1	90	12	67	6	4,9	8	6	●●	●●
TC430-M10X1-L2-	MF 10x1	1	90	12	67	7	5,5	8	7	●●	●●
TC430-M10X1.25-L2-	MF 10x1.25	1,25	100	15	77	7	5,5	8	7	●●	●●
TC430-M12X1-L2-	MF 12x1	1	100	13	73	9	7	10	8		●●
TC430-M12X1.25-L2-	MF 12x1.25	1,25	100	13	73	9	7	10	8	●●	●●
TC430-M12X1.5-L2-	MF 12x1.5	1,5	100	13	73	9	7	10	8	●●	●●
TC430-M14X1.5-L2-	MF 14x1.5	1,5	100	15	71	11	9	12	8	●●	●●
TC430-M16X1.5-L2-	MF 16x1.5	1,5	100	15	58	12	9	12	8	●●	●●

Ordering example for the grade WW60AD: TC430-M10X1-L2-WW60AD

C2

WALTER SELECT

●● Primary application

● Other application


Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E machine thread formers

TC440 Supreme




- For long-chipping materials
- For stainless steels when using emulsion



	P	M	K	N	S	H	O
WY80AD	●	●●	●	●	●	●	●

DIN 2174

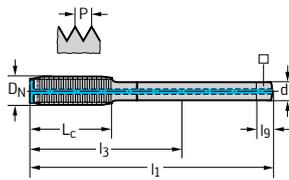

Designation	D _N	P mm	l ₁ mm	L _c mm	l ₃ mm	h ₉	□	l ₉ mm	N	WY80AD
TC440-M8X1-L2-	MF 8x1	1	90	12	67	6	4,9	8	5	●●
TC440-M10X1-L2-	MF 10x1	1	90	12	67	7	5,5	8	5	●●
TC440-M12X1.5-L2-	MF 12x1.5	1,5	100	13	73	9	7	10	5	●●
TC440-M14X1.5-L2-	MF 14x1.5	1,5	100	15	58	11	9	12	6	●●
TC440-M16X1.5-L2-	MF 16x1.5	1,5	100	15	58	12	9	12	6	●●
TC440-M18X1.5-L2-	MF 18x1.5	1,5	110	17	66	14	11	14	6	●●

Ordering example for the grade WY80AD: TC440-M10X1-L2-WY80AD


C2

Solid carbide machine thread formers

TC470 Supreme




- For long-chipping materials



	P	M	K	N	S	H	O
WG20EL	●●		●	●			

DIN 2174											WG20EL
Designation	D_N	P mm	l_1 mm	L_c mm	l_3 mm	h6	\square	l_9 mm	N		
TC470-M10X1-L5-	MF 10x1	1	90	14	67	7	5,5	8	7	●●	
TC470-M12X1.5-L5-	MF 12x1.5	1,5	100	13	73	9	7	10	8	●●	
TC470-M16X1.5-L5-	MF 16x1.5	1,5	100	15	58	12	9	12	8	●●	

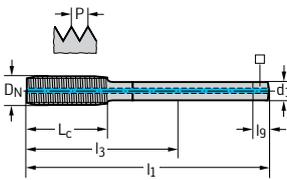

Ordering example for the grade WG20EL: TC470-M10X1-L5-WG20EL

C2

WALTER SELECT



 ●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

Solid carbide machine thread formers

TC470 Supreme




- For long-chipping materials

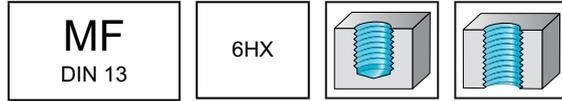

	P	M	K	N	S	H	O
WG20EL	●●		●	●			

DIN 2174											WG20EL
Designation	D_N	P mm	l_1 mm	L_c mm	l_3 mm	h6	\square	l_9 mm	N		
TC470-M16X1.5-L2-	MF 16x1.5	1,5	100	15	58	12	9	12	8	●●	

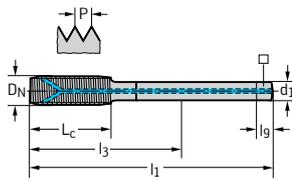

Ordering example for the grade WG20EL: TC470-M16X1.5-L2-WG20EL

C2

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E machine thread formers


TC410 Advance



- For long-chipping materials

UNC
ASME B1.1

2BX




$\leq 3,5 \times DN$

$C=2-3$

36HRC
1200
-200
N/mm²

	P	M	K	N	S	H	O
WY80AD	●●	●●	●	●●	●	●	●

DIN 2184-1

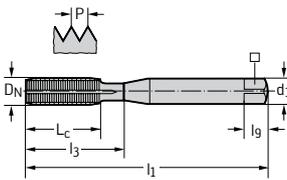

Designation	D _{N-P}	D _{N-P} mm	l ₁ mm	L _c mm	l ₃ mm	h ₉	□	l ₉ mm	N	WY80AD
TC410-UNC2-C6-	UNC #2-56	2,184	45	7	12	2,8	2,1	5	3	●●
TC410-UNC4-C6-	UNC #4-40	2,845	56	9	18	3,5	2,7	6	3	●●
TC410-UNC6-C6-	UNC #6-32	3,505	56	11	20	4	3	6	4	●●
TC410-UNC8-C6-	UNC #8-32	4,166	63	12	21	4,5	3,4	6	5	●●
TC410-UNC10-C6-	UNC #10-24	4,826	70	13	25	6	4,9	8	5	●●
TC410-UNC1/4-C6-	UNC 1/4-20	6,35	80	15	30	7	5,5	8	5	●●
TC410-UNC5/16-C6-	UNC 5/16-18	7,938	90	18	35	8	6,2	9	5	●●
TC410-UNC3/8-C6-	UNC 3/8-16	9,525	100	20	39	10	8	11	5	●●

Ordering example for the grade WY80AD: TC410-UNC1/4-C6-WY80AD

C2

**WALTER
SELECT**

●● Primary application ● Other application


Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

HSS-E machine thread formers

TC410 Advance



- For long-chipping materials



	P	M	K	N	S	H	O
WY80AD	●●	●●	●	●●	●		

DIN 2184-1											WY80AD
Designation	D _{N-P}	D _{N-P} mm	l ₁ mm	L _c mm	l ₃ mm	h ₉	□	l ₉ mm	N		
TC410-UNC7/16-L6-	UNC 7/16-14	11,113	100	20	76	8	6,2	9	6	☹	
TC410-UNC1/2-L6-	UNC 1/2-13	12,7	110	23	83	9	7	10	6	☹	
TC410-UNC5/8-L6-	UNC 5/8-11	15,875	110	25	68	12	9	12	6	☹	

Ordering example for the grade WY80AD: TC410-UNC1/2-L6-WY80AD

C2

WALTER SELECT

●● Primary application ● Other application


Best tool for → Good = 😊 → Average = 😐 → Poor = ☹ machining conditions

HSS-E machine thread formers

TC410 Advance mm



- For long-chipping materials



	P	M	K	N	S	H	O
WY80AD	●●	●●	●●	●●	●		

DIN 2184-1											WY80AD
Designation	D _{N-P}	D _{N-P} mm	l ₁ mm	L _c mm	l ₃ mm	h ₉	□	l ₉ mm	N		
TC410-UNF2-C6-	UNF #2-64	2,184	45	7	12	2,8	2,1	5	3	☼	
TC410-UNF4-C6-	UNF #4-48	2,845	56	9	18	3,5	2,7	6	3	☼	
TC410-UNF6-C6-	UNF #6-40	3,505	56	11	20	4	3	6	4	☼	
TC410-UNF8-C6-	UNF #8-36	4,166	63	12	21	4,5	3,4	6	5	☼	
TC410-UNF10-C6-	UNF #10-32	4,826	70	13	25	6	4,9	8	5	☼	
TC410-UNF1/4-C6-	UNF 1/4-28	6,35	80	15	30	7	5,5	8	5	☼	
TC410-UNF5/16-C6-	UNF 5/16-24	7,938	90	18	35	8	6,2	9	5	☼	
TC410-UNF3/8-C6-	UNF 3/8-24	9,525	90	20	39	10	8	11	5	☼	


Ordering example for the grade WY80AD: TC410-UNF1/4-C6-WY80AD

HSS-E machine thread formers

TC410 Advance



- For long-chipping materials



	P	M	K	N	S	H	O
WY80AD	●●	●●	●	●●	●		

DIN 2184-1											WY80AD
Designation	D_N -P	D_N -P mm	l_1 mm	L_c mm	l_3 mm	h9	\square	l_9 mm	N		
TC410-UNF7/16-L6-	UNF 7/16-20	11,113	100	20	76	8	6,2	9	6	☹	
TC410-UNF1/2-L6-	UNF 1/2-20	12,7	100	21	73	9	7	10	6	☹	
TC410-UNF5/8-L6-	UNF 5/8-18	15,875	100	21	58	12	9	12	6	☹	

Ordering example for the grade WY80AD: TC410-UNF1/2-L6-WY80AD

C2

WALTER SELECT ●● Primary application ● Other application



Best tool for → Good = 😊 → Average = 😐 → Poor = ☹ machining conditions

HSS-E machine thread formers

TC410 Advance



- For long-chipping materials

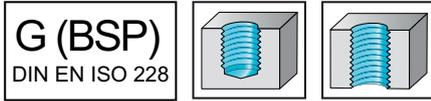

	P	M	K	N	S	H	O
WY80AD	●●	●●	●	●●	●		

DIN 2189											WY80AD
Designation	D _N -P	D _N -P mm	Threads per inch	l ₁ mm	L _c mm	l ₃ mm	h9	□	l ₉ mm	N	
TC410-G1/8-N6-	G 1/8-28	9,728	28	90	20	67	7	5,5	8	5	●●
TC410-G1/4-N6-	G 1/4-19	13,157	19	100	21	71	11	9	12	6	●●
TC410-G3/8-N6-	G 3/8-19	16,662	19	100	21	58	12	9	12	6	●●
TC410-G1/2-N6-	G 1/2-14	20,955	14	125	24	80	16	12	15	8	●●
TC410-G3/4-N6-	G 3/4-14	26,441	14	140	26	77	20	16	19	8	●●
TC410-G1-N6-	G 1"-11	33,249	11	160	28	93	25	20	23	8	●●

Ordering example for the grade WY80AD: TC410-G1-N6-WY80AD

HSS-E machine thread formers

mm


Protodyn® SF



- For long-chipping materials


$\leq 3,5 \times D_N$ C=2-3 36HRC
 1200-200 N/mm²

G (BSP)
DIN EN ISO 228




TICN	P	M	K	N	S	H	O
	●●	●●	●●	●●	●		

DIN 2189

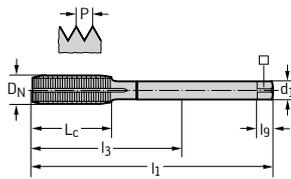

Designation	D _N -P	D _N -P mm	Threads per inch	l ₁ mm	L _c mm	l ₃ mm	h ₉	□	l _g mm	N
D7466706-G1/8	G 1/8-28	9,728	28	90	20	67	7	5,5	8	5
D7466706-G1/4	G 1/4-19	13,157	19	100	21	71	11	9	12	6
D7466706-G3/8	G 3/8-19	16,662	19	100	21	58	12	9	12	6
D7466706-G1/2	G 1/2-14	20,955	14	125	24	80	16	12	15	7

C2

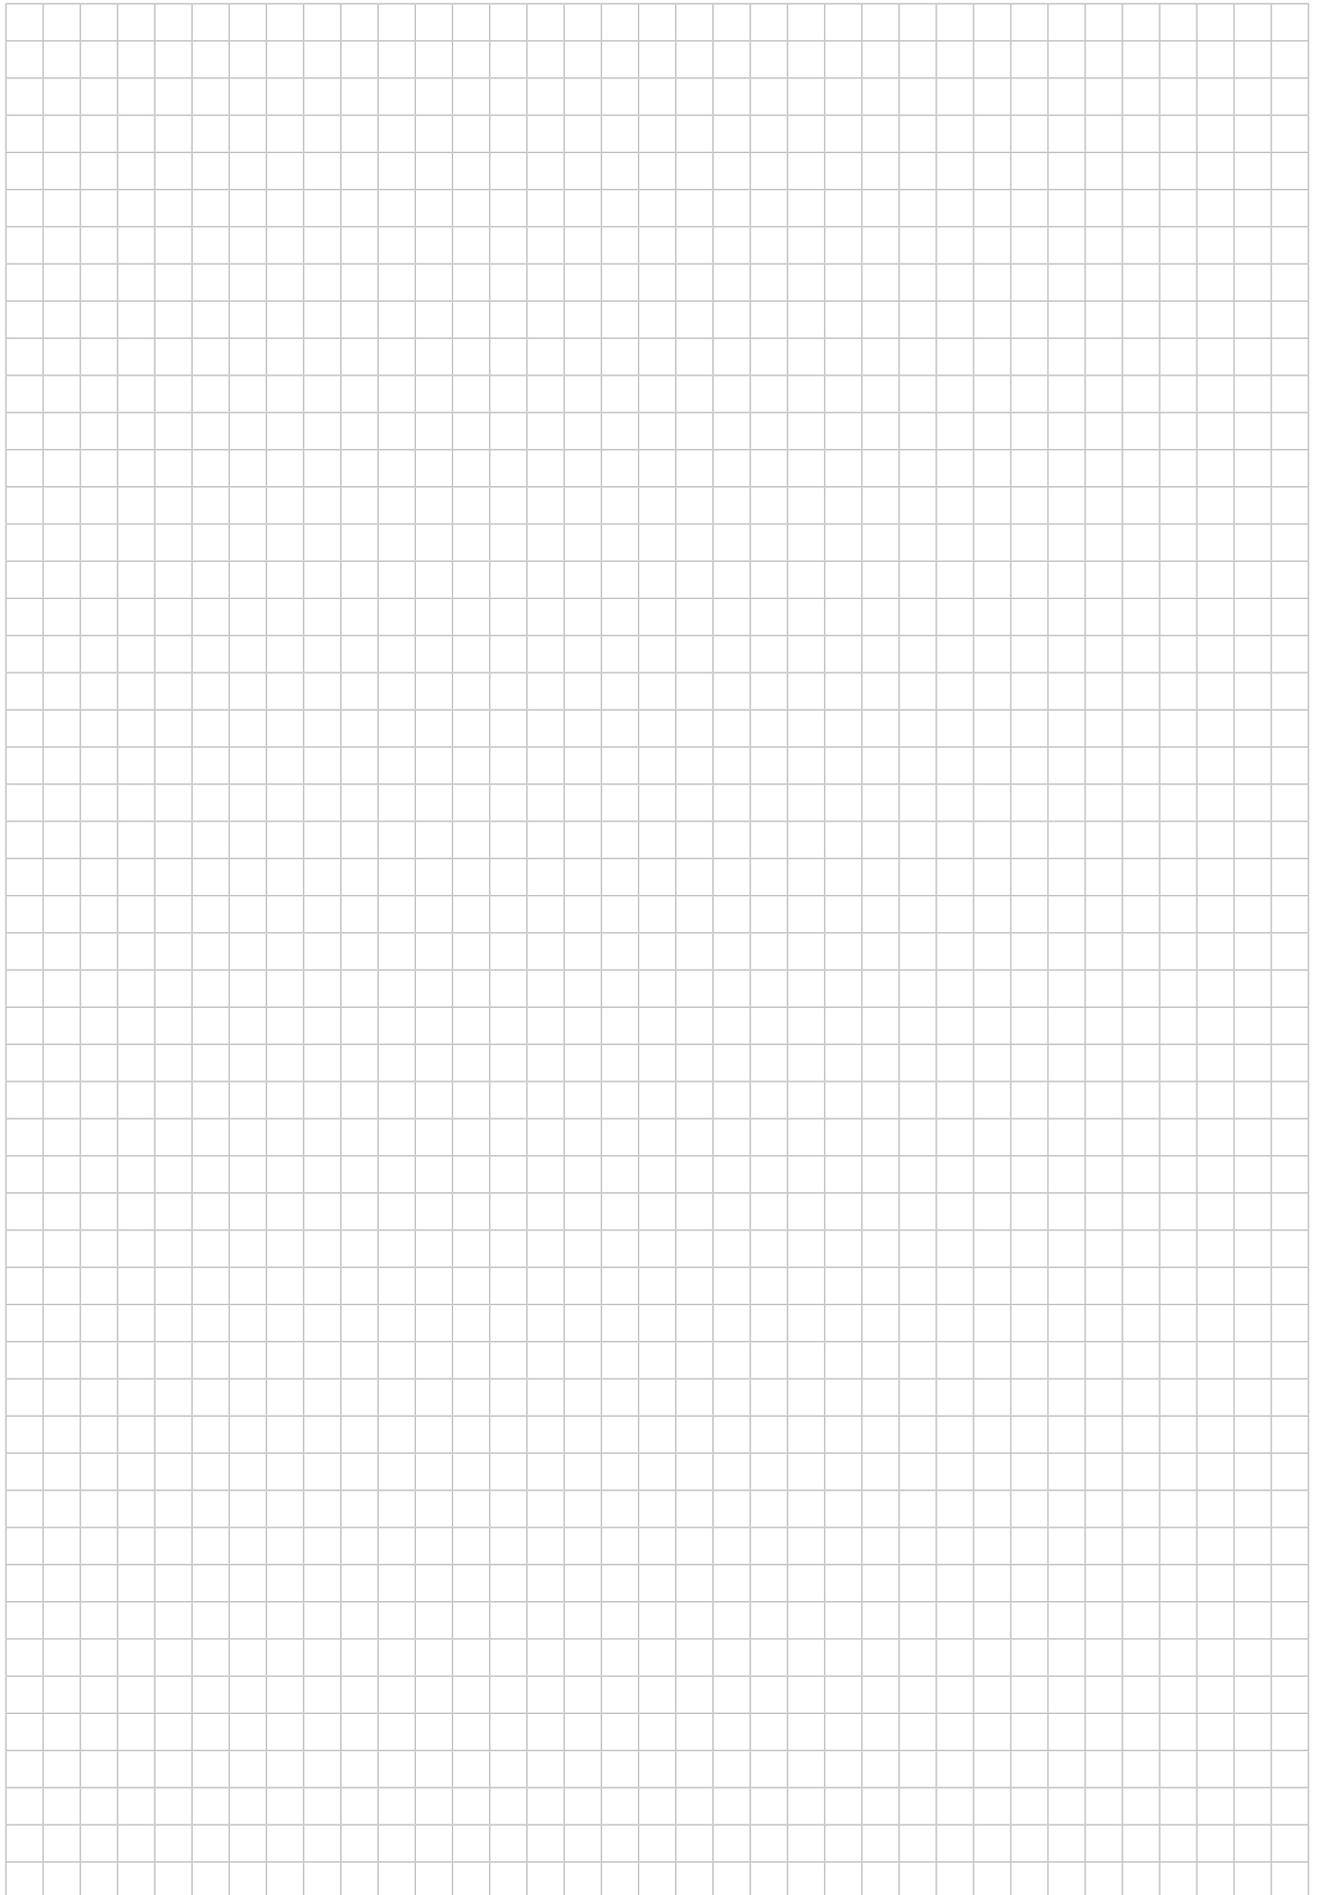




C – Threading

C3: Thread milling		Page
Thread milling	Product range overview	
	Thread milling	358
	Order pages	
	Thread milling	359
Thread milling cutters with countersink	Product range overview	
	Thread milling cutters with countersink	362
	Order pages	
	Thread milling cutters with countersink	364
Thread milling cutters without countersink	Product range overview	
	Thread milling cutters without countersink	368
	Order pages	
	Thread milling cutters without countersink	370
Solid carbide orbital thread milling cutters	Product range overview	
	Solid carbide orbital thread milling cutters	408
	Order pages	
	Solid carbide orbital thread milling cutters	409
Thread milling cutters with indexable inserts	Product range overview	
	Thread milling cutters with indexable inserts	426
	Order pages	
	Thread milling cutters with indexable inserts	428

Drill thread milling cutters

Machining



Thread depth

 $2 \times D_N$
 $2,5 \times D_N$




Designation	TC685 Supreme	TC685 Supreme	TMD
Thread type			
M	✓	✓	✓
MF	✓	✓	
UNC / UNF / UN-8			
G / Rc / Rp			
MJ / UNJC / UNJF			
NPT / NPTF			
Pg / BSW / Tr			
Indexable inserts basic shape	✓	✓	
Tolerance			
Coolant supply	External / axial	External / axial	axial
Chamfer form			
Coating / grade	WB10RC	WB10RC	NHC / TAX
Cutting tool material	VHM	VHM	VHM
P Steel	●	●	
M Stainless steel			
K Cast iron	●	●	●●
N NF metals			●●
S Materials with difficult cutting properties	●	●	
H Hard materials	●●	●●	
O Other			
Page in catalogue	C 360	C 359	C 361
QR code			
www.walter-tools.com/woc/	TC685	TC685	tmd

Orbital drill thread milling cutter

TC685 Supreme



- Orbital drill thread milling cutters for hardened materials
- Chamfer, core hole and thread in one operation

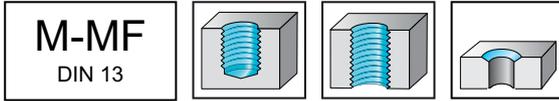

	P	M	K	N	S	H	O
WB10RC	●		●		●	●	

Tool		P mm	D _c mm	l ₃ mm	l ₁ mm	l ₄ mm	h6	Z	WB10RC
<p>DIN 6535 HA</p>	TC685-M3-A0E-	0,5	2,35	7,5	50	14	6	4	☺
	TC685-M4-A0E-	0,7	3,1	10	57	21	6	4	☺
	TC685-M5-A0E-	0,8	3,9	12,5	57	21	6	4	☺
<p>DIN 6535 HA</p>	TC685-M6-A1E-	1	4,6	15	57	21	6	4	☺
	TC685-M8-A1E-	1,25	6,2	20	63	27	8	4	☺
	TC685-M10-A1E-	1,5	7,8	25	63	27	8	4	☺
	TC685-M12-A1E-	1,75	9	30	72	32	10	4	☺
	TC685-M14-A1E-	2	10,5	35	83	38	12	4	☺
	TC685-M16-A1E-	2	12,5	40	92	44	16	4	☺

Maximum nominal thread diameter for fine thread: D_c x 1.94
 Example: TC685-M8.. / 6.2 mm x 1.94 = 12.03 mm / MF 12x1.25 possible
 Ordering example for the grade WB10RC: TC685-M3-A0E-WB10RC

**WALTER
SELECT**

●● Primary application ● Other application
 Best tool for → Good = ☺ → Average = ☹ → Poor = ☹ machining conditions



C3

Orbital drill thread milling cutter

TC685 Supreme



- Orbital drill thread milling cutters for hardened materials
- Chamfer, core hole and thread in one operation

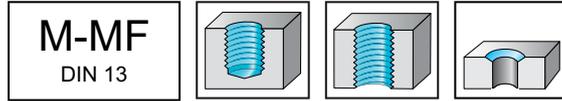

	P	M	K	N	S	H	O
WB10RC	●		●		●	●	

Tool	Designation	P mm	D _c mm	l ₃ mm	l ₁ mm	l ₄ mm	h ₆	Z	WB10RC
<p>DIN 6535 HA</p>	TC685-M3-A0D-	0,5	2,35	6	50	14	6	4	☺
	TC685-M4-A0D-	0,7	3,1	8	50	14	6	4	☺
	TC685-M5-A0D-	0,8	3,9	10	57	21	6	4	☺
<p>DIN 6535 HA</p>	TC685-M6-A1D-	1	4,6	12	57	21	6	4	☺
	TC685-M8-A1D-	1,25	6,2	16	63	27	8	4	☺
	TC685-M10-A1D-	1,5	7,8	20	63	27	8	4	☺
	TC685-M12-A1D-	1,75	9	24	72	32	10	4	☺
	TC685-M14-A1D-	2	10,5	28	83	38	12	4	☺
	TC685-M16-A1D-	2	12,5	32	92	44	16	4	☺

Maximum nominal thread diameter for fine thread: D_c x 1.94
 Example: TC685-M8.. / 6.2 mm x 1.94 = 12.03 mm / MF 12x1.25 possible
 Ordering example for the grade WB10RC: TC685-M3-A0D-WB10RC

C3

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = ☺ → Average = ☹ → Poor = ☹ machining conditions


Solid carbide drill thread milling cutters

mm

TMD



- Drilling, countersinking and thread milling in one operation
- Drill thread milling cutters

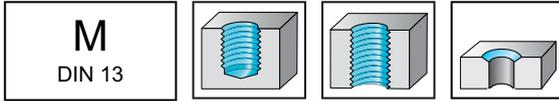

M
DIN 13

	P	M	K	N	S	H	O
NHC				●●			
TAX			●●	●●			

Tool		P	D _c	D _a	L _c	L _{c3}	d ₄	L _{c1}	L _{c2}	l ₁	l ₄	h ₆	Z
<p>DIN 6535 HA</p>	Designation												
	H5075011-M6	1	5	4,75	11	14,7	6,3	13,8	1	62	26	8	3
	H5075011-M8	1,25	6,8	6,42	13,8	18,9	8,3	17,7	1,25	74	34	10	3
<p>DIN 6535 HA</p>	H5075018-M6	1	5	4,75	11	14,7	6,3	13,8	1	62	26	8	3
	H5075018-M8	1,25	6,8	6,42	13,8	18,9	8,3	17,7	1,25	74	34	10	3
	H5075018-M10	1,5	8,5	8,07	18	23,7	10,3	22,2	1,5	80	35	12	3

C3


WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

Thread milling cutters with countersink

Machining



Thread depth

2 x D_N



Designation	TMC
-------------	-----

Thread type

M	✓
MF	✓
UNC / UNF / UN-8	
G / Rc / Rp	
MJ / UNJC / UNJF	
NPT / NPTF	
Pg / BSW / Tr	
Indexable inserts basic shape	✓

Tolerance	
-----------	--

Coolant supply	External / axial
----------------	------------------

Chamfer form	
--------------	--

Coating / grade	TICN / uncoated
-----------------	-----------------

Cutting tool material	VHM
-----------------------	-----

P Steel	●●
M Stainless steel	●●
K Cast iron	●●
N NF metals	●●
S Materials with difficult cutting properties	●●
H Hard materials	
O Other	●


Page in catalogue	C 364
-------------------	-------

QR code



www.walter-tools.com/woc/

tmc

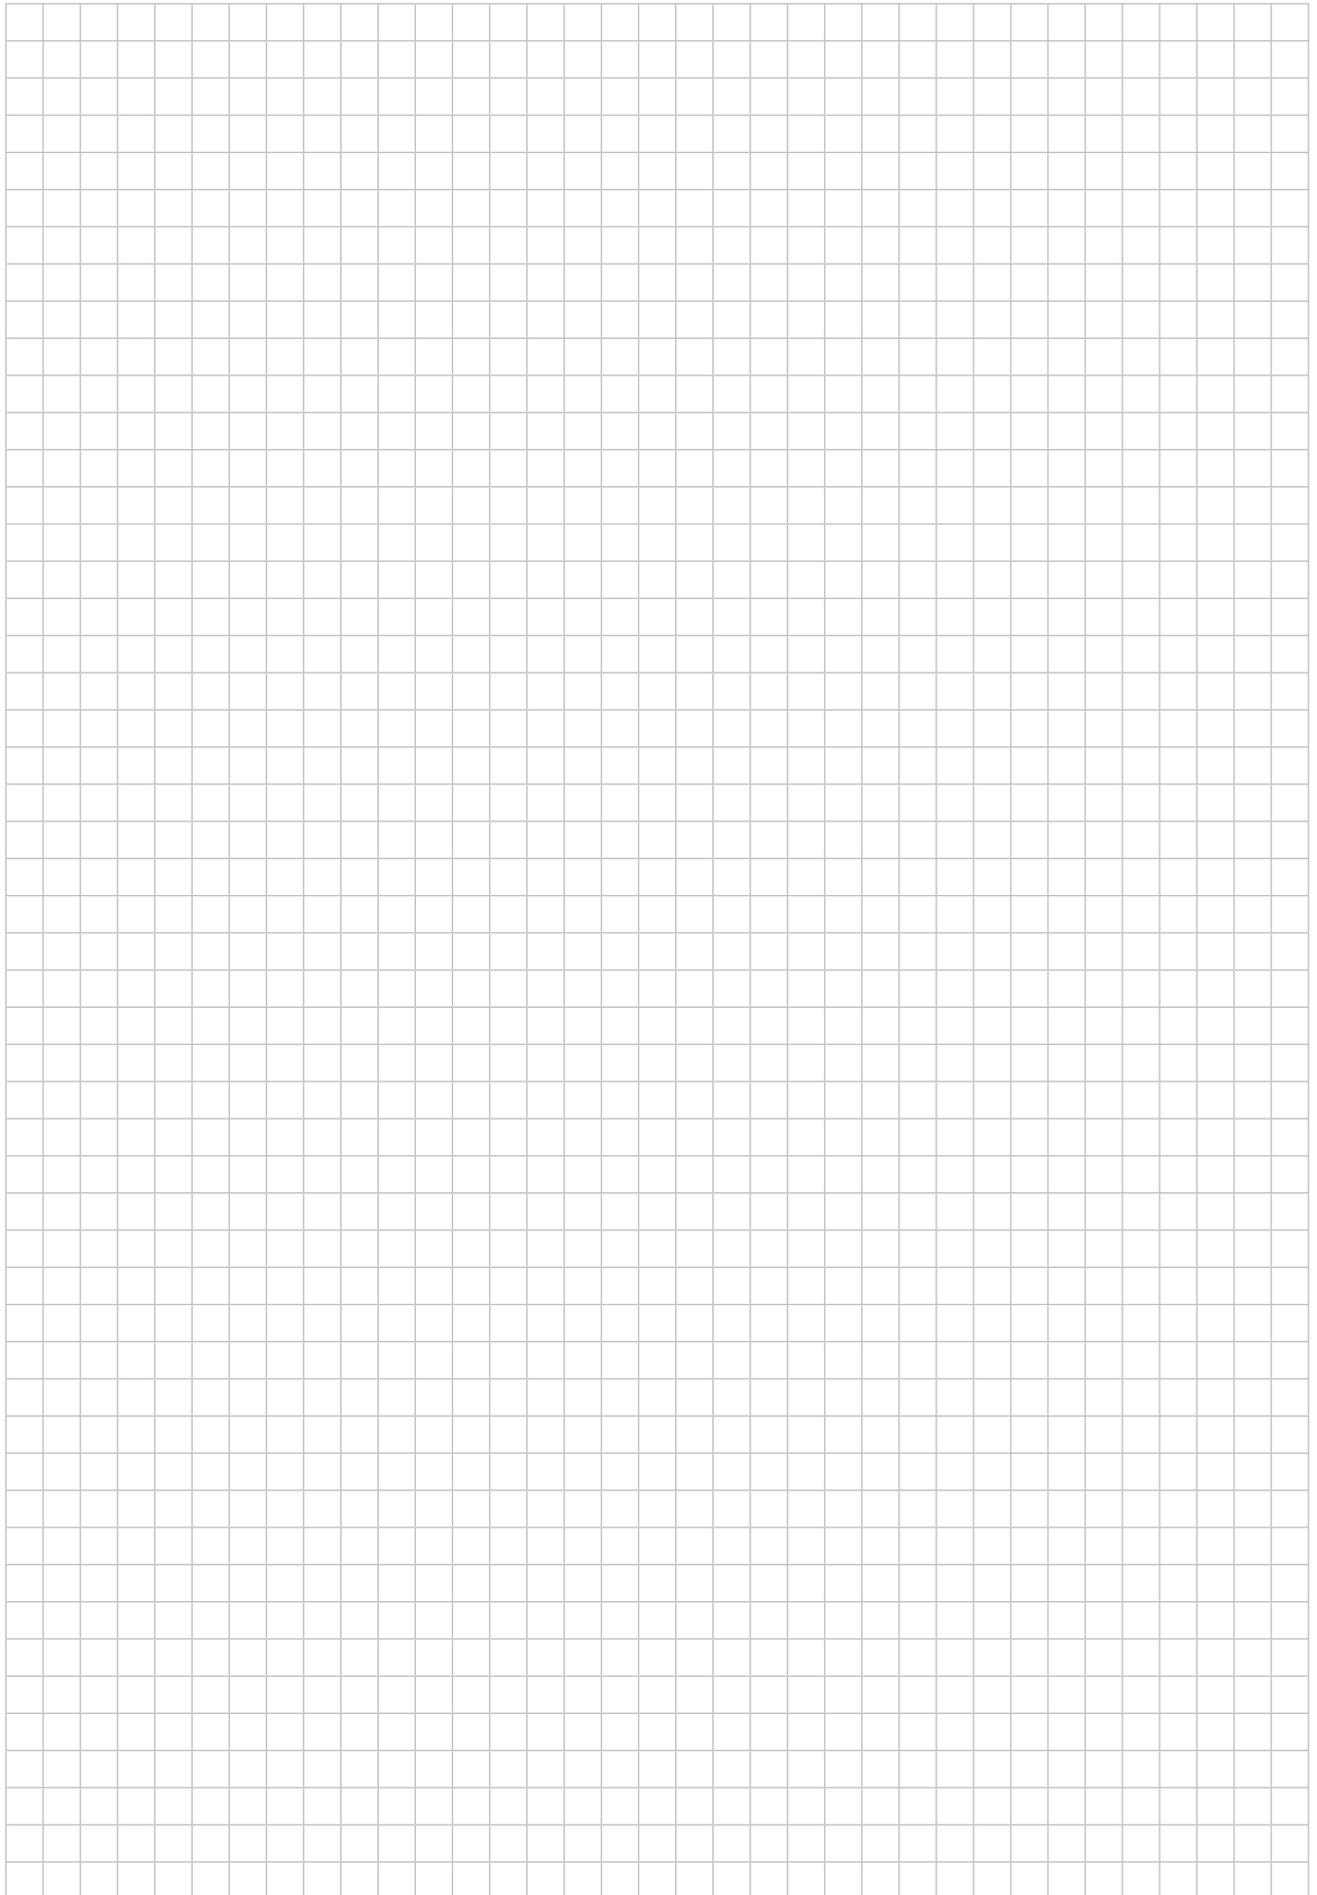

C3


Solid carbide thread milling cutters

mm

TMC



- Universal thread milling cutters with countersink

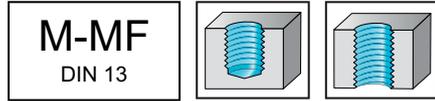

	P	M	K	N	S	H	O
TICN	●●	●●	●●	●●	●●	●●	●

Tool		Designation	D _N	P mm	D _c mm	L _c mm	l ₁ mm	l ₄ mm	h6	Z
		H5055106-M3	M 3	0,5	2,3	6	57	21	6	3

DIN 6535 HB

C3

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions



Solid carbide thread milling cutters

mm

TMC




- Universal thread milling cutters with countersink

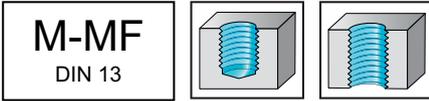

TICN	P	M	K	N	S	H	O
	●●	●●	●●	●●	●●		●

Tool

Designation	D _N	P mm	D _c mm	L _c mm	l ₁ mm	l ₄ mm	h6	Z
H5055116-M4	M 4	0,7	3,2	8,4	57	21	6	3
H5055116-M5	M 5	0,8	4,1	10,4	57	21	6	3
H5055116-M6	M 6	1	4,8	12	63	27	8	3
H5055116-M8	M 8	1,25	6,5	16,3	72	32	10	3
H5055116-M10	M 10	1,5	8,2	21	83	38	12	3
H5055116-M12	M 12	1,75	9,9	24,5	83	38	14	4
H5055116-M14	M 14	2	11,6	30	92	44	16	4
H5055116-M16	M 16	2	13,6	32	92	44	18	4

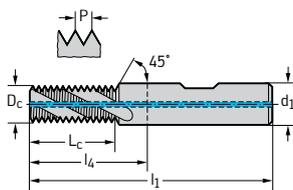

DIN 6535 HB

C3

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


Solid carbide thread milling cutters

mm

TMC



– Universal thread milling cutters with countersink

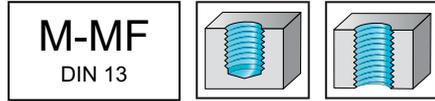

	P	M	K	N	S	H	O
uncoated	●●	●●	●●	●●	●●		●
TICN	●●	●●	●●	●●	●●		●

Tool		Designation	D _N	P mm	D _c mm	L _c mm	l ₁ mm	l ₄ mm	h6	Z
<p>DIN 6535 HA</p>	H505500-M3	M 3	0,5	2,3	6	57	21	6	3	
	H5055006-M3	M 3	0,5	2,3	6	57	21	6	3	
<p>DIN 6535 HA</p>										

C3

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions



Solid carbide thread milling cutters

mm

TMC




– Universal thread milling cutters with countersink



TICN	P	M	K	N	S	H	O
	●●	●●	●●	●●	●●		●

Tool

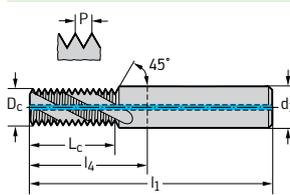

DIN 6535 HA

Designation	D _N	P mm	D _c mm	L _c mm	l ₁ mm	l ₄ mm	h6	Z
H5055016-M4	M 4	0,7	3,2	8,4	57	21	6	3
H5055016-M5	M 5	0,8	4,1	10,4	57	21	6	3
H5055016-M6	M 6	1	4,8	12	63	27	8	3
H5055016-M8	M 8	1,25	6,5	16,3	72	32	10	3
H5055016-M10	M 10	1,5	8,2	21	83	38	12	3
H5055016-M12	M 12	1,75	9,9	24,5	83	38	14	4
H5055016-M14	M 14	2	11,6	30	92	44	16	4
H5055016-M16	M 16	2	13,6	32	92	44	18	4



C3

**WALTER
SELECT**

●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

Thread milling cutters without countersink

Machining



Thread depth

 $1,5 \times D_N$
 $1,5 \times D_N$
 $1,5 \times D_N$
 $2 \times D_N$
 $2 \times D_N$


Designation

TC610 Supreme

TMG HRC

TMG Ni

TC611 Supreme

TC620 Supreme

Thread type

M

✓

✓

✓

✓

MF

✓

✓

✓

✓

UNC / UNF / UN-8

✓

✓

✓

G / Rc / Rp

✓

MJ / UNJC / UNJF

✓

NPT / NPTF
Pg / BSW / Tr
Indexable inserts basic shape

✓

✓

✓

✓

✓

Tolerance

Coolant supply

External / axial

External

External / axial

External / axial

axial

Chamfer form

Coating / grade

WB10RD / WJ30RC

TAX

TiCN

 WB10RD /
WJ30RC

WB10TJ

Cutting tool material

VHM

VHM

VHM

VHM

VHM

P Steel

●●

●●

●●

●●

●●

M Stainless steel

●●

●●

●●

●●

●●

K Cast iron

●●

●●

●●

●●

●●

N NF metals

●●

●●

●●

●●

●●

S Materials with difficult cutting properties

●●

●●

●●

●●

●●

H Hard materials

●●

●●

●●

●●

●●

O Other

●

●

●

●

●

Page in catalogue

C 370

C 399

C 401

C 380

C 388

QR code


www.walter-tools.com/woc/

TC610

tmg-hrc

tmg-ni

TC611

TC620

WALTER SELECT

●● Primary application ● Other application

Thread milling cutters without countersink

Machining			
Thread depth	2 x D _N	2,5 x D _N	



Designation	TME	TC620 Supreme	TMG
Thread type			
M	✓	✓	
MF	✓	✓	
UNC / UNF / UN-8		✓	
G / Rc / Rp			
MJ / UNJC / UNJF			
NPT / NPTF			✓
Pg / BSW / Tr			
Indexable inserts basic shape	✓	✓	
Tolerance			
Coolant supply	External	axial	External
Chamfer form			
Coating / grade	TICN	WB10TJ	TICN
Cutting tool material	VHM	VHM	VHM
P Steel	●●	●●	●●
M Stainless steel	●●	●●	●●
K Cast iron	●●	●●	●●
N NF metals	●●	●●	●●
S Materials with difficult cutting properties	●●	●●	●●
H Hard materials			
O Other	●	●	●
Page in catalogue	C 398	C 386	C 405
QR code			
	www.walter-tools.com/woc/tme	www.walter-tools.com/woc/TC620	www.walter-tools.com/woc/tmg

C3

Solid carbide thread milling cutters




TC610 Supreme



- Universal thread milling cutters

G (BSP)
DIN EN ISO 228

Rp
DIN EN 10226-1



P	M	K	N	S	H	O
●●	●●	●●	●●	●●	●●	●

Tool	Designation	Threads per inch	D _N	D _c mm	L _c mm	l ₁ mm	l ₄ mm	h ₆	Z	WJ30RC
	TC610-G1/8-W0-	28	G 1/8-28	6	15,4	57	21	6	5	●●
	TC610-G1/4-W0-	19	G 1/4-19	10	20,1	72	32	10	5	●●
	TC610-G3/8-W0-	19	G 3/8-19	14	25,4	83	38	14	7	●●
	TC610-G1/2-W0-	14	G 1/2-14	16	32,7	96	44	16	6	●●
	TC610-G1X20-W0-	11	G 1"-11	20	50,8	120	75	20	6	●●

DIN 6535 HB

Ordering example for the grade WJ30RC: TC610-G1/2-W0-WJ30RC

C3

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

Solid carbide thread milling cutters





TC610 Supreme



- Universal thread milling cutters

G (BSP)
DIN EN ISO 228

Rp
DIN EN 10226-1



WJ30RC	P	M	K	N	S	H	O
	●●	●●	●●	●●	●●		●

Tool	Designation	Threads per inch	D_N	D_c mm	L_c mm	l_1 mm	l_4 mm	h6	Z	WJ30RC
	TC610-G1/8-W1-	28	G 1/8-28	6	15,4	57	21	6	5	●●
	TC610-G1/4-W1-	19	G 1/4-19	10	20,1	72	32	10	5	●●
	TC610-G3/8-W1-	19	G 3/8-19	14	25,4	83	38	14	7	●●
	TC610-G1/2-W1-	14	G 1/2-14	16	32,7	96	44	16	6	●●
	TC610-G1X20-W1-	11	G 1"-11	20	50,8	120	75	20	6	●●

DIN 6535 HB

Ordering example for the grade WJ30RC: TC610-G1/2-W1-WJ30RC

C3

WALTER SELECT

●● Primary application ● Other application


Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

Solid carbide thread milling cutters

TC610 Supreme



– Universal thread milling cutters

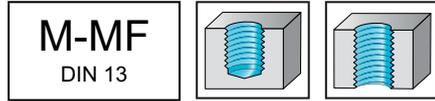

	P	M	K	N	S	H	O
WJ30RC	●●	●●	●●	●●	●●	●●	●

Tool	Designation	D _N	P mm	D _c mm	L _c mm	l ₁ mm	l ₄ mm	h6	Z	WJ30RC
<p>DIN 6535 HB</p>	TC610-M6-W0-	M 6	1	4,5	9	57	21	6	4	☺
	TC610-M8-W0-	M 8	1,25	6	12,5	57	21	6	4	☺
	TC610-M10-W0-	M 10	1,5	7,5	15	63	27	8	4	☺
	TC610-M12-W0-	M 12	1,75	9,5	19,3	72	32	10	4	☺
	TC610-M14-W0-	M 14	2	10	22	72	32	10	4	☺
	TC610-M16-W0-	M 16	2	12	24	83	38	12	5	☺
	TC610-M20-W0-	M 20	2,5	16	30	92	44	16	6	☺
	TC610-M24-W0-	M 24	3	19	36	104	54	20	6	☺

Ordering example for the grade WJ30RC: TC610-M10-W0-WJ30RC

C3

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = ☺ → Average = ☹ → Poor = ☹ machining conditions


Solid carbide thread milling cutters

TC610 Supreme




– Universal thread milling cutters

M-MF
DIN 13



	P	M	K	N	S	H	O
WB10RD	●●	●●	●●	●●	●●		●
WJ30RC	●●	●●	●●	●●	●●		●

Tool

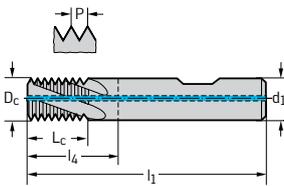

DIN 6535 HB

Designation	D _N	P mm	D _c mm	L _c mm	l ₁ mm	l ₄ mm	h6	Z	WB10RD	WJ30RC
TC610-M6-W1-	M 6	1	4,5	9	57	21	6	4	☺	☺
TC610-M8-W1-	M 8	1,25	6	12,5	57	21	6	4	☺	☺
TC610-M10-W1-	M 10	1,5	7,5	15	63	27	8	4	☺	☺
TC610-M12-W1-	M 12	1,75	9,5	19,3	72	32	10	4	☺	☺
TC610-M14-W1-	M 14	2	10	22	72	32	10	4		☺
TC610-M16-W1-	M 16	2	12	24	83	38	12	5	☺	☺
TC610-M20-W1-	M 20	2,5	16	30	92	44	16	6		☺
TC610-M24-W1-	M 24	3	19	36	104	54	20	6		☺

Ordering example for the grade WB10RD: TC610-M10-W1-WB10RD



C3

Solid carbide thread milling cutters

TC610 Supreme



– Universal thread milling cutters

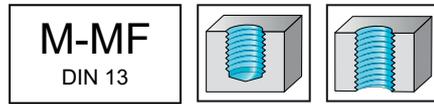

	P	M	K	N	S	H	O
WJ30RC	●●	●●	●●	●●	●●	●●	●


Tool	Designation	D _N	P mm	D _c mm	L _c mm	l ₁ mm	l ₄ mm	h ₆	Z	WJ30RC
<p>DIN 6535 HB</p>	TC610-M6X0.5-W0-	MF 6X0,5	0,5	4,8	9	57	21	6	5	●●
	TC610-M8X0.75-W0-	MF 8X0.75	0,75	6	12	57	21	6	5	●●
	TC610-M8X1-W0-	MF 8X1	1	6	12	57	21	6	4	●●
	TC610-M10X0.5-W0-	MF 10X0.5	0,5	8	15	63	27	8	7	●●
	TC610-M10X1-W0-	MF 10X1	1	8	15	63	27	8	5	●●
	TC610-M12X1-W0-	MF 12X1	1	10	18	72	32	10	6	●●
	TC610-M12X1.25-W0-	MF 12X1.25	1,25	10	18,8	72	32	10	6	●●
	TC610-M12X1.5-W0-	MF 12X1.5	1,5	10	18	72	32	10	5	●●
	TC610-M14X1-W0-	MF 14X1	1	12	21	83	38	12	7	●●
	TC610-M14X1.5-W0-	MF 14X1.5	1,5	12	21	83	38	12	6	●●
	TC610-M16X1-W0-	MF 16X1	1	14	24	83	38	14	7	●●
	TC610-M16X1.5-W0-	MF 16X1.5	1,5	14	24	83	38	14	6	●●
	TC610-M18X1-W0-	MF 18X1	1	16	27	92	44	16	8	●●
	TC610-M18X1.5-W0-	MF 18X1.5	1,5	16	27	92	44	16	7	●●
	TC610-M20X2-W0-	MF 20X2	2	16	30	92	44	16	6	●●
	TC610-M24X2-W0-	MF 24X2	2	20	36	104	54	20	7	●●

Ordering example for the grade WJ30RC: TC610-M10X0.5-W0-WJ30RC


C3

Solid carbide thread milling cutters

TC610 Supreme



– Universal thread milling cutters

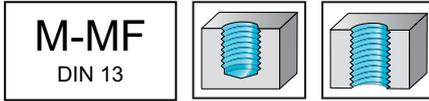

	P	M	K	N	S	H	O
WJ30RC	●●	●●	●●	●●	●●		●
WB10RD	●●	●●	●●	●●	●●		●

Tool	Designation	D _N	P mm	D _c mm	L _c mm	l ₁ mm	l ₄ mm	h ₆	Z	WJ30RC	WB10RD
	TC610-M6X0.5-W1-	MF 6X0,5	0,5	4,8	9	57	21	6	5	☹	
	TC610-M8X0.75-W1-	MF 8X0.75	0,75	6	12	57	21	6	5	☹	☹
	TC610-M8X1-W1-	MF 8X1	1	6	12	57	21	6	4	☹	
	TC610-M10X0.5-W1-	MF 10X0.5	0,5	8	15	63	27	8	7	☹	
	TC610-M10X1-W1-	MF 10X1	1	8	15	63	27	8	5	☹	☹
	TC610-M12X1-W1-	MF 12X1	1	10	18	72	32	10	6	☹	☹
	TC610-M12X1.25-W1-	MF 12X1.25	1,25	10	18,8	72	32	10	6	☹	
	TC610-M12X1.5-W1-	MF 12X1.5	1,5	10	18	72	32	10	5	☹	☹
	TC610-M14X1-W1-	MF 14X1	1	12	21	83	38	12	7	☹	☹
	TC610-M14X1.5-W1-	MF 14X1.5	1,5	12	21	83	38	12	6	☹	☹
	TC610-M16X1-W1-	MF 16X1	1	14	24	83	38	14	7	☹	
	TC610-M16X1.5-W1-	MF 16X1.5	1,5	14	24	83	38	14	6	☹	☹
	TC610-M18X1-W1-	MF 18X1	1	16	27	92	44	16	8	☹	
	TC610-M18X1.5-W1-	MF 18X1.5	1,5	16	27	92	44	16	7	☹	☹
	TC610-M20X2-W1-	MF 20X2	2	16	30	92	44	16	6	☹	☹
	TC610-M24X2-W1-	MF 24X2	2	20	36	104	54	20	7	☹	


Ordering example for the grade WJ30RC: TC610-M10X0.5-W1-WJ30RC

Solid carbide thread milling cutters

TC610 Supreme



– Universal thread milling cutters

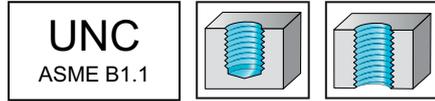

	P	M	K	N	S	H	O
WJ30RC	●●	●●	●●	●●	●●	●●	●

Tool	Designation	Threads per inch	D _N	D _c mm	L _c mm	l ₁ mm	l ₄ mm	h ₆	Z	WJ30RC
<p>DIN 6535 HB</p>	TC610-UNC1/4-W0-	20	UNC 1/4-20	4,8	10,2	57	21	6	3	☺
	TC610-UNC5/16-W0-	18	UNC 5/16-18	5,5	12,7	57	21	6	4	☺
	TC610-UNC3/8-W0-	16	UNC 3/8-16	7,5	14,3	63	27	8	4	☺
	TC610-UNC7/16-W0-	14	UNC 7/16-14	8	18,1	63	27	8	4	☺
	TC610-UNC1/2-W0-	13	UNC 1/2-13	10	19,5	72	32	10	4	☺
	TC610-UNC9/16-W0-	12	UNC 9/16-12	10	19,5	72	32	10	4	☺
	TC610-UNC5/8-W0-	11	UNC 5/8-11	12	25,4	83	38	12	5	☺
	TC610-UNC3/4-W0-	10	UNC 3/4-10	14	30,5	90	45	14	5	☺
	TC610-UNC1-W0-	8	UNC 1"-8	18	38,1	104	54	20	5	☺

Ordering example for the grade WJ30RC: TC610-UNC1-W0-WJ30RC

C3

WALTER SELECT ●● Primary application ● Other application



Best tool for → Good = ☺ → Average = ☹ → Poor = ☹ machining conditions

Solid carbide thread milling cutters

TC610 Supreme



– Universal thread milling cutters

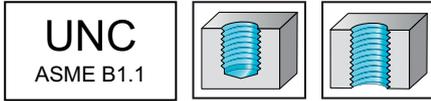

	P	M	K	N	S	H	O
WJ30RC	●●	●●	●●	●●	●●		●

Tool	Designation	Threads per inch	D _N	D _c mm	L _c mm	l ₁ mm	l ₄ mm	h ₆	Z	WJ30RC
<p>DIN 6535 HB</p>	TC610-UNC1/4-W1-	20	UNC 1/4-20	4,8	10,2	57	21	6	3	☺
	TC610-UNC5/16-W1-	18	UNC 5/16-18	5,5	12,7	57	21	6	4	☺
	TC610-UNC3/8-W1-	16	UNC 3/8-16	7,5	14,3	63	27	8	4	☺
	TC610-UNC7/16-W1-	14	UNC 7/16-14	8	18,1	63	27	8	4	☺
	TC610-UNC1/2-W1-	13	UNC 1/2-13	10	19,5	72	32	10	4	☺
	TC610-UNC9/16-W1-	12	UNC 9/16-12	10	19,5	72	32	10	4	☺
	TC610-UNC5/8-W1-	11	UNC 5/8-11	12	25,4	83	38	12	5	☺
	TC610-UNC3/4-W1-	10	UNC 3/4-10	14	30,5	90	45	14	5	☺
	TC610-UNC7/8-W1-	9	UNC 7/8-9	16	33,9	98	50	16	5	☺
	TC610-UNC1-W1-	8	UNC 1"-8	18	38,1	104	54	20	5	☺



Ordering example for the grade WJ30RC: TC610-UNC1-W1-WJ30RC

Solid carbide thread milling cutters

TC610 Supreme



– Universal thread milling cutters

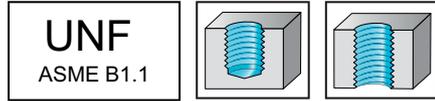

	P	M	K	N	S	H	O
WJ30RC	●●	●●	●●	●●	●●	●●	●

Tool	Designation	Threads per inch	D _N	D _c mm	L _c mm	l ₁ mm	l ₄ mm	h ₆	Z	WJ30RC
<p>DIN 6535 HB</p>	TC610-UNF10-W0-	32	UNF #10-32	3,6	7,9	57	21	6	3	☺
	TC610-UNF1/4-W0-	28	UNF 1/4-28	4,8	10	57	21	6	4	☺
	TC610-UNF5/16-W0-	24	UNF 5/16-24	6	12,7	57	21	6	4	☺
	TC610-UNF7/16-W0-	20	UNF 7/16-20	8	17,8	63	27	8	4	☺
	TC610-UNF9/16-W0-	18	UNF 9/16-18	10	22,6	72	32	10	5	☺
	TC610-UNF3/4-W0-	16	UNF 3/4-16	14	28,6	88	43	14	6	☺

Ordering example for the grade WJ30RC: TC610-UNF1/4-W0-WJ30RC

C3

WALTER SELECT ●● Primary application ● Other application



Best tool for → Good = ☺ → Average = ☹ → Poor = ☹☹ machining conditions

Solid carbide thread milling cutters

TC610 Supreme



– Universal thread milling cutters

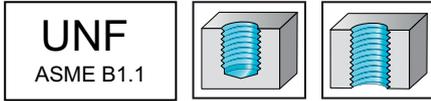

	P	M	K	N	S	H	O
WJ30RC	●●	●●	●●	●●	●●		●

Tool	Designation	Threads per inch	D _N	D _c mm	L _c mm	l ₁ mm	l ₄ mm	h6	Z	WJ30RC
<p>DIN 6535 HB</p>	TC610-UNF10-W1-	32	UNF #10-32	3,6	7,9	57	21	6	3	☺
	TC610-UNF1/4-W1-	28	UNF 1/4-28	4,8	10	57	21	6	4	☺
	TC610-UNF5/16-W1-	24	UNF 5/16-24	6	12,7	57	21	6	4	☺
	TC610-UNF7/16-W1-	20	UNF 7/16-20	8	17,8	63	27	8	4	☺
	TC610-UNF9/16-W1-	18	UNF 9/16-18	10	22,6	72	32	10	5	☺
	TC610-UNF3/4-W1-	16	UNF 3/4-16	14	28,6	88	43	14	6	☺

Ordering example for the grade WJ30RC: TC610-UNF1/4-W1-WJ30RC

C3

WALTER SELECT



●● Primary application ● Other application
 Best tool for → Good = ☺ → Average = ☹ → Poor = ☹ machining conditions

Solid carbide thread milling cutters

TC611 Supreme



– Universal thread milling cutters

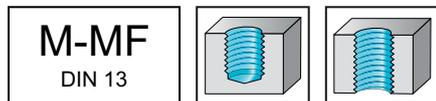

	P	M	K	N	S	H	O
WJ30RC	●●	●●	●●	●●	●●	●●	●

Tool	Designation	D _N	P mm	D _c mm	L _c mm	l ₁ mm	l ₄ mm	h6	Z	WJ30RC
<p>DIN 6535 HB</p>	TC611-M6-W0-	M 6	1	4,5	12	57	21	6	4	☺
	TC611-M8-W0-	M 8	1,25	6	16,3	57	21	6	4	☺
	TC611-M10-W0-	M 10	1,5	7,5	21	63	27	8	4	☺
	TC611-M12-W0-	M 12	1,75	9,5	24,5	72	32	10	4	☺
	TC611-M14-W0-	M 14	2	10	28	80	40	10	4	☺
	TC611-M16-W0-	M 16	2	12	32	89	44	12	5	☺
	TC611-M20-W0-	M 20	2,5	16	40	105	57	16	6	☺
	TC611-M24-W0-	M 24	3	19	48	118	68	20	6	☺

Ordering example for the grade WJ30RC: TC611-M10-W0-WJ30RC

C3

WALTER SELECT

●● Primary application ● Other application



Best tool for → Good = ☺ → Average = ☹ → Poor = ☹ machining conditions

Solid carbide thread milling cutters

TC611 Supreme




- Universal thread milling cutters

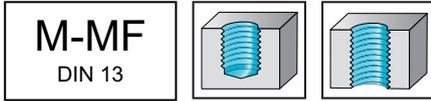

	P	M	K	N	S	H	O
WB10RD	●●	●●	●●	●●	●●		●
WJ30RC	●●	●●	●●	●●	●●		●

Tool										WB10RD	WJ30RC
Designation	D _N	P mm	D _c mm	L _c mm	l ₁ mm	l ₄ mm	h6	Z			
TC611-M6-W1-	M 6	1	4,5	12	57	21	6	4	☺	☺	
TC611-M8-W1-	M 8	1,25	6	16,3	57	21	6	4	☺	☺	
TC611-M10-W1-	M 10	1,5	7,5	21	63	27	8	4	☺	☺	
TC611-M12-W1-	M 12	1,75	9,5	24,5	72	32	10	4	☺	☺	
TC611-M14-W1-	M 14	2	10	28	80	40	10	4		☺	
TC611-M16-W1-	M 16	2	12	32	89	44	12	5	☺	☺	
TC611-M20-W1-	M 20	2,5	16	40	105	57	16	6	☺	☺	
TC611-M24-W1-	M 24	3	19	48	118	68	20	6		☺	

Ordering example for the grade WB10RD: TC611-M10-W1-WB10RD

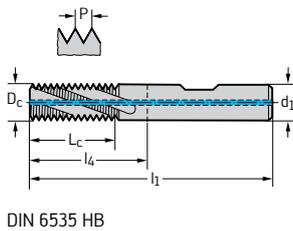


DIN 6535 HB

Solid carbide thread milling cutters

TC611 Supreme



– Universal thread milling cutters

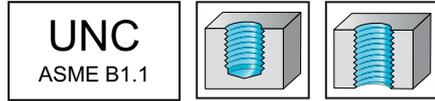

	P	M	K	N	S	H	O
WJ30RC	●●	●●	●●	●●	●●	●●	●

Tool	Designation	Threads per inch	D _N	D _c mm	L _c mm	l ₁ mm	l ₄ mm	h ₆	Z	WJ30RC
<p>DIN 6535 HB</p>	TC611-UNC1/4-W0-	20	UNC 1/4-20	4,8	12,7	57	21	6	3	☺
	TC611-UNC5/16-W0-	18	UNC 5/16-18	5,5	16,9	57	21	6	4	☺
	TC611-UNC3/8-W0-	16	UNC 3/8-16	7,5	19,1	63	27	8	4	☺
	TC611-UNC7/16-W0-	14	UNC 7/16-14	8	23,6	68	32	8	4	☺
	TC611-UNC1/2-W0-	13	UNC 1/2-13	10	25,4	76	36	10	4	☺
	TC611-UNC9/16-W0-	12	UNC 9/16-12	10	29,6	80	40	10	4	☺
	TC611-UNC5/8-W0-	11	UNC 5/8-11	12	32,3	90	45	12	5	☺
	TC611-UNC3/4-W0-	10	UNC 3/4-10	14	38,1	98	53	14	5	☺
	TC611-UNC7/8-W0-	9	UNC 7/8-9	16	45,2	108	60	16	5	☺
	TC611-UNC1-W0-	8	UNC 1"-8	18	50,8	116	68	20	5	☺

Ordering example for the grade WJ30RC: TC611-UNC1-W0-WJ30RC

C3

WALTER SELECT ●● Primary application ● Other application



Best tool for → Good = ☺ → Average = ☹ → Poor = ☹☹ machining conditions

Solid carbide thread milling cutters

TC611 Supreme



– Universal thread milling cutters

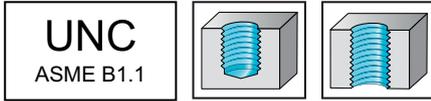

	P	M	K	N	S	H	O
WJ30RC	●●	●●	●●	●●	●●		●

Tool	Designation	Threads per inch	D _N	D _c mm	L _c mm	l ₁ mm	l ₄ mm	h ₆	Z	WJ30RC
<p>DIN 6535 HB</p>	TC611-UNC1/4-W1-	20	UNC 1/4-20	4,8	12,7	57	21	6	3	☺
	TC611-UNC5/16-W1-	18	UNC 5/16-18	5,5	16,9	57	21	6	4	☺
	TC611-UNC3/8-W1-	16	UNC 3/8-16	7,5	19,1	63	27	8	4	☺
	TC611-UNC7/16-W1-	14	UNC 7/16-14	8	23,6	68	32	8	4	☺
	TC611-UNC1/2-W1-	13	UNC 1/2-13	10	25,4	76	36	10	4	☺
	TC611-UNC9/16-W1-	12	UNC 9/16-12	10	29,6	80	40	10	4	☺
	TC611-UNC5/8-W1-	11	UNC 5/8-11	12	32,3	90	45	12	5	☺
	TC611-UNC3/4-W1-	10	UNC 3/4-10	14	38,1	98	53	14	5	☺
	TC611-UNC7/8-W1-	9	UNC 7/8-9	16	45,2	108	60	16	5	☺
	TC611-UNC1-W1-	8	UNC 1"-8	18	50,8	116	68	20	5	☺

Ordering example for the grade WJ30RC: TC611-UNC1-W1-WJ30RC

C3

WALTER SELECT


 ●● Primary application ● Other application
 Best tool for → Good = ☺ → Average = ☹ → Poor = ☹ machining conditions

Solid carbide thread milling cutters

TC611 Supreme



- Universal thread milling cutters

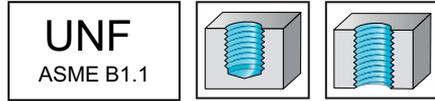

	P	M	K	N	S	H	O
WJ30RC	●●	●●	●●	●●	●●	●●	●

Tool	Designation	Threads per inch	D _N	D _c mm	L _c mm	l ₁ mm	l ₄ mm	h ₆	Z	WJ30RC
<p>DIN 6535 HB</p>	TC611-UNF10-W0-	32	UNF #10-32	3,6	10,3	57	21	6	3	☺
	TC611-UNF1/4-W0-	28	UNF 1/4-28	4,8	12,7	57	21	6	4	☺
	TC611-UNF5/16-W0-	24	UNF 5/16-24	6	15,9	57	21	6	4	☺
	TC611-UNF7/16-W0-	20	UNF 7/16-20	8	22,9	68	32	8	4	☺
	TC611-UNF9/16-W0-	18	UNF 9/16-18	10	29,6	80	40	10	5	☺
	TC611-UNF3/4-W0-	16	UNF 3/4-16	14	38,1	98	53	14	6	☺

Ordering example for the grade WJ30RC: TC611-UNF1/4-W0-WJ30RC

C3

WALTER SELECT ●● Primary application ● Other application



Best tool for → Good = ☺ → Average = ☹ → Poor = ☹☹ machining conditions

Solid carbide thread milling cutters

TC611 Supreme




- Universal thread milling cutters

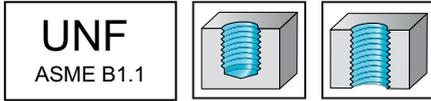

	P	M	K	N	S	H	O
WJ30RC	●●	●●	●●	●●	●●		●

Tool										WJ30RC
Designation	Threads per inch	D _N	D _c mm	L _c mm	l ₁ mm	l ₄ mm	h6	Z		
TC611-UNF10-W1-	32	UNF #10-32	3,6	10,3	57	21	6	3	☺	
TC611-UNF1/4-W1-	28	UNF 1/4-28	4,8	12,7	57	21	6	4	☺	
TC611-UNF5/16-W1-	24	UNF 5/16-24	6	15,9	57	21	6	4	☺	
TC611-UNF7/16-W1-	20	UNF 7/16-20	8	22,9	68	32	8	4	☺	
TC611-UNF9/16-W1-	18	UNF 9/16-18	10	29,6	80	40	10	5	☺	
TC611-UNF3/4-W1-	16	UNF 3/4-16	14	38,1	98	53	14	6	☺	

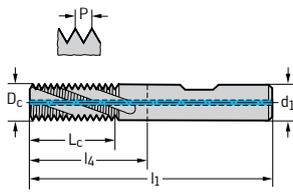

DIN 6535 HB

Ordering example for the grade WJ30RC: TC611-UNF1/4-W1-WJ30RC

C3

WALTER SELECT ●● Primary application ● Other application



Best tool for → Good = ☺ → Average = ☹ → Poor = ☹ machining conditions

Multiple-row thread milling cutters

TC620 Supreme




- Universal multiple-row thread milling cutters
- For high cutting speeds and high feeds per tooth

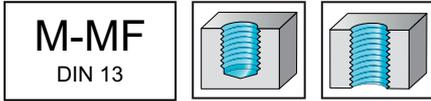

	P	M	K	N	S	H	O
WB10TJ	●●	●●	●●	●●	●●	●●	●

Tool

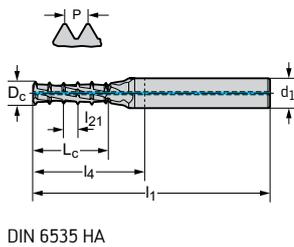

DIN 6535 HA

Designation	D _N	P mm	D _c mm	l ₂₁ mm	L _c mm	l ₄ mm	l ₁ mm	h ₆	Z	WB10TJ
TC620-M4-A1E-	M 4	0,7	3,1	2,1	10,5	21	57	6	3	☺
TC620-M5-A1E-	M 5	0,8	3,9	2,4	12,8	21	57	6	3	☺
TC620-M6-A1E-	M 6	1	4,7	3	15	21	57	6	4	☺
TC620-M8-A1E-	M 8	1,25	6,3	3,75	20	27	63	8	4	☺
TC620-M10-A1E-	M 10	1,5	7,9	4,5	27	36	72	8	4	☺
TC620-M12-A1E-	M 12	1,75	9,6	5,25	31,5	43	83	10	4	☺
TC620-M14-A1E-	M 14	2	11,2	6	36	55	100	12	4	☺
TC620-M16-A1E-	M 16	2	13,1	6	42	58	106	16	5	☺
TC620-M20-A1E-	M 20	2,5	16,4	7,5	52,5	68	116	18	5	☺



Ordering example for the grade WB10TJ: TC620-M10-A1E-WB10TJ

Multiple-row thread milling cutters

TC620 Supreme



- Universal multiple-row thread milling cutters
- For high cutting speeds and high feeds per tooth

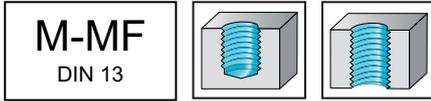

	P	M	K	N	S	H	O
WB10TJ	●●	●●	●●	●●	●●		●

Tool	Designation	D _N	P mm	D _c mm	l ₂₁ mm	L _c mm	l ₄ mm	l ₁ mm	h ₆	Z	WB10TJ
<p>DIN 6535 HB</p>	TC620-M8-W5E-	M 8	1,25	6,3	3,75	20	32	68	8	4	☺
	TC620-M10-W5E-	M 10	1,5	7,9	4,5	27	39	75	8	4	☺
	TC620-M12-W5E-	M 12	1,75	9,6	5,25	31,5	45	85	10	4	☺
	TC620-M14-W5E-	M 14	2	11,2	6	36	55	100	12	4	☺
	TC620-M16-W5E-	M 16	2	13,1	6	42	58	106	16	5	☺
	TC620-M18-W5E-	M 18	2,5	14,5	7,5	45	60	108	16	5	☺
	TC620-M20-W5E-	M 20	2,5	16,4	7,5	52,5	67	115	18	5	☺

Ordering example for the grade WB10TJ: TC620-M10-W5E-WB10TJ

C3

WALTER SELECT



 ●● Primary application ● Other application
 Best tool for → Good = ☺ → Average = ☹ → Poor = ☹☹ machining conditions

Multiple-row thread milling cutters

TC620 Supreme




- Universal multiple-row thread milling cutters
- For high cutting speeds and high feeds per tooth

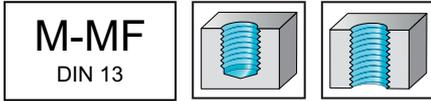

	P	M	K	N	S	H	O
WB10TJ	●●	●●	●●	●●	●●	●●	●

Tool

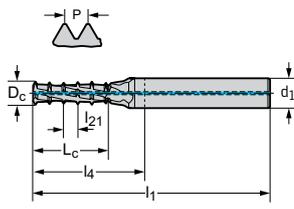

DIN 6535 HA

Designation	D _N	P mm	D _c mm	l ₂₁ mm	L _c mm	l ₄ mm	l ₁ mm	h ₆	Z	WB10TJ
TC620-M4-A1D-	M 4	0,7	3,1	1,4	8,4	21	57	6	3	☺
TC620-M5-A1D-	M 5	0,8	3,9	1,6	10,4	21	57	6	3	☺
TC620-M6-A1D-	M 6	1	4,7	2	12	21	57	6	4	☺
TC620-M8-A1D-	M 8	1,25	6,3	2,5	16,3	27	63	8	4	☺
TC620-M10-A1D-	M 10	1,5	7,9	3	21	27	63	8	4	☺
TC620-M12-A1D-	M 12	1,75	9,6	3,5	24,5	32	72	10	4	☺
TC620-M14-A1D-	M 14	2	11,2	4	28	38	83	12	4	☺
TC620-M16-A1D-	M 16	2	13,1	4	32	44	92	16	5	☺
TC620-M20-A1D-	M 20	2,5	16,4	5	40	58	106	18	5	☺

Ordering example for the grade WB10TJ: TC620-M10-A1D-WB10TJ

C3

WALTER SELECT ●● Primary application ● Other application



Best tool for → Good = ☺ → Average = ☹ → Poor = ☹ machining conditions

Multiple-row thread milling cutters

TC620 Supreme



- Universal multiple-row thread milling cutters
- For high cutting speeds and high feeds per tooth

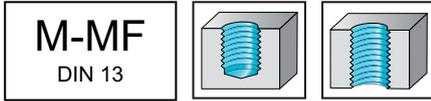

	P	M	K	N	S	H	O
WB10TJ	●●	●●	●●	●●	●●		●

Tool											WB10TJ
Designation	D _N	P mm	D _c mm	l ₂₁ mm	L _c mm	l ₄ mm	l ₁ mm	h ₆	Z		
TC620-M8-W5D-	M 8	1,25	6,3	2,5	16,3	27	63	8	4	☺	
TC620-M10-W5D-	M 10	1,5	7,9	3	21	32	68	8	4	☺	
TC620-M12-W5D-	M 12	1,75	9,6	3,5	24,5	38	78	10	4	☺	
TC620-M14-W5D-	M 14	2	11,2	4	28	45	90	12	4	☺	
TC620-M16-W5D-	M 16	2	13,1	4	32	44	92	16	5	☺	
TC620-M18-W5D-	M 18	2,5	14,5	5	37,5	52	100	16	5	☺	
TC620-M20-W5D-	M 20	2,5	16,4	5	40	57	105	18	5	☺	

DIN 6535 HB



Ordering example for the grade WB10TJ: TC620-M10-W5D-WB10TJ

Multiple-row thread milling cutters

TC620 Supreme




- Universal multiple-row thread milling cutters
- For high cutting speeds and high feeds per tooth

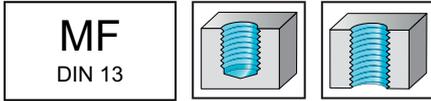

	P	M	K	N	S	H	O
WB10TJ	●●	●●	●●	●●	●●	●●	●

Tool

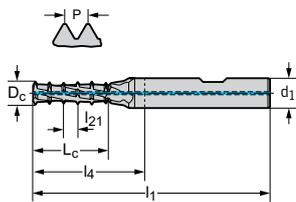

DIN 6535 HB

Designation	D _N	P mm	D _c mm	l ₂₁ mm	L _c mm	l ₄ mm	l ₁ mm	h ₆	Z	WB10TJ
TC620-M4X0.5-W1D-	MF 4X0.5	0,5	3,2	1	8	21	57	6	4	☺
TC620-M6X0.75-W1D-	MF 6X0.75	0,75	4,9	1,5	12	21	57	6	4	☺

Ordering example for the grade WB10TJ: TC620-M4X0.5-W1D-WB10TJ



C3

Multiple-row thread milling cutters

TC620 Supreme



- Universal multiple-row thread milling cutters
- For high cutting speeds and high feeds per tooth

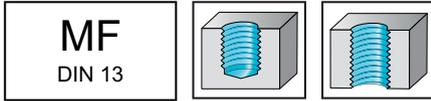

	P	M	K	N	S	H	O
WB10TJ	●●	●●	●●	●●	●●		●

Tool	Designation	D _N	P mm	D _c mm	l _{z1} mm	L _c mm	l ₄ mm	l ₁ mm	h ₆	Z	WB10TJ
<p>DIN 6535 HB</p>	TC620-M8X1-W5D-	MF 8X1	1	6,5	2	16	27	63	8	4	☺
	TC620-M10X1.25W5D-	M10X1.25	1,25	8,2	2,5	20	32	72	10	5	☺
	TC620-M10X1-W5D-	MF 10X1	1	8,4	2	20	32	72	10	5	☺
	TC620-M12X1.5-W5D-	MF 12X1.5	1,5	9,8	3	24	38	78	10	5	☺
	TC620-M12X1.25W5D-	MF 12X1.25	1,25	10	2,5	25	38	78	10	5	☺
	TC620-M12X1-W5D-	MF 12X1	1	10,3	2	24	38	83	12	6	☺
	TC620-M14X1.5-W5D-	MF 14X1.5	1,5	11,7	3	28,5	44	89	12	5	☺
	TC620-M16X1.5-W5D-	MF 16X1.5	1,5	13,6	3	33	44	92	16	6	☺
	TC620-M18X1.5-W5D-	MF 18X1.5	1,5	15,5	3	36	52	100	16	6	☺
	TC620-M20X1.5-W5D-	MF 20X1.5	1,5	17,3	3	40,5	57	105	18	7	☺

Ordering example for the grade WB10TJ: TC620-M10X1-W5D-WB10TJ

C3



●● Primary application ● Other application
 Best tool for → Good = ☺ → Average = ☹ → Poor = ☹ machining conditions

Multiple-row thread milling cutters

TC620 Supreme




- Universal multiple-row thread milling cutters
- For high cutting speeds and high feeds per tooth

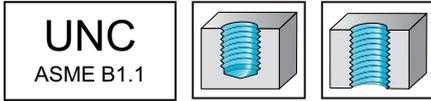

	P	M	K	N	S	H	O
WB10TJ	●	●	●	●	●	●	●

Tool

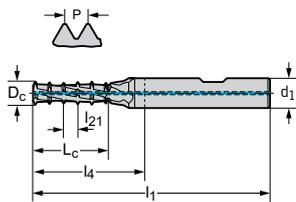

DIN 6535 HB

Designation	D _N	Threads per inch	D _c mm	l ₂₁ mm	L _c mm	l ₄ mm	l ₁ mm	h ₆	Z	WB10TJ
TC620-UNC8-W1E-	UNC #8-32	32	3,1	2,38	10,3	21	57	6	3	☺
TC620-UNC10-W1E-	UNC #10-24	24	3,5	3,18	12,7	21	57	6	3	☺
TC620-UNC1/4-W1E-	UNC 1/4-20	20	4,7	3,81	16,5	29	65	6	3	☺

Ordering example for the grade WB10TJ: TC620-UNC1/4-W1E-WB10TJ

C3

WALTER SELECT

●● Primary application ● Other application



Best tool for → Good = ☺ → Average = ☹ → Poor = ☹ machining conditions

Multiple-row thread milling cutters

TC620 Supreme




- Universal multiple-row thread milling cutters
- For high cutting speeds and high feeds per tooth

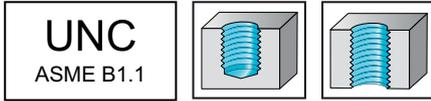

	P	M	K	N	S	H	O
WB10TJ	●●	●●	●●	●●	●●		●

Tool											WB10TJ
Designation	D _N	Threads per inch	D _c mm	l ₂₁ mm	L _c mm	l ₄ mm	l ₁ mm	h ₆	Z		
TC620-UNC5/16-W5E-	UNC 5/16-18	18	6,1	4,23	21,2	34	70	8	4	☺	
TC620-UNC3/8-W5E-	UNC 3/8-16	16	7,4	4,76	23,8	36	72	8	4	☺	
TC620-UNC1/2-W5E-	UNC 1/2-13	13	10,1	5,86	31,3	47	92	12	4	☺	
TC620-UNC5/8-W5E-	UNC 5/8-11	11	12,7	6,93	41,6	60	108	16	4	☺	
DIN 6535 HB TC620-UNC3/4-W5E-	UNC 3/4-10	10	15,5	7,62	48,3	62	110	16	5	☺	

Ordering example for the grade WB10TJ: TC620-UNC1/2-W5E-WB10TJ

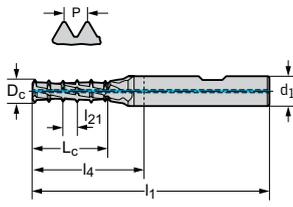

DIN 6535 HB

C3



WALTER SELECT ●● Primary application ● Other application
 Best tool for → Good = ☺ → Average = ☹ → Poor = ☹ machining conditions

Multiple-row thread milling cutters

TC620 Supreme




- Universal multiple-row thread milling cutters
- For high cutting speeds and high feeds per tooth

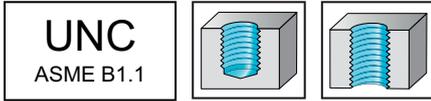

	P	M	K	N	S	H	O
WB10TJ	●●	●●	●●	●●	●●	●●	●

Tool

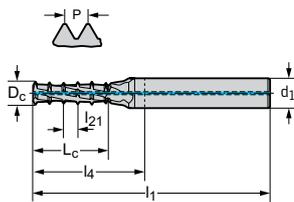

DIN 6535 HA

Designation	D _N	Threads per inch	D _c mm	l ₂₁ mm	L _c mm	l ₄ mm	l ₁ mm	h ₆	Z	WB10TJ
TC620-UNC8-A1D-	UNC #8-32	32	3,1	1,59	8,7	21	57	6	3	☺
TC620-UNC10-A1D-	UNC #10-24	24	3,5	2,12	10,6	21	57	6	3	☺
TC620-UNC1/4-A1D-	UNC 1/4-20	20	4,7	2,54	12,7	21	57	6	3	☺
TC620-UNC5/16-A1D-	UNC 5/16-18	18	6,1	2,82	16,9	27	63	8	4	☺
TC620-UNC3/8-A1D-	UNC 3/8-16	16	7,4	3,18	19,1	27	63	8	4	☺
TC620-UNC1/2-A1D-	UNC 1/2-13	13	10,1	3,91	25,4	38	83	12	4	☺
TC620-UNC5/8-A1D-	UNC 5/8-11	11	12,7	4,62	32,3	44	92	16	4	☺
TC620-UNC3/4-A1D-	UNC 3/4-10	10	15,5	5,08	38,1	56	104	16	5	☺
TC620-UNC7/8-A1D-	UNC 7/8-9	9	18	5,64	45,2	67	115	18	5	☺

Ordering example for the grade WB10TJ: TC620-UNC1/2-A1D-WB10TJ



C3

Multiple-row thread milling cutters

TC620 Supreme




- Universal multiple-row thread milling cutters
- For high cutting speeds and high feeds per tooth

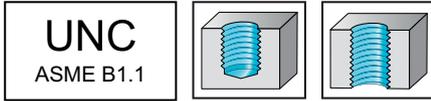

	P	M	K	N	S	H	O
WB10TJ	●●	●●	●●	●●	●●		●

Tool											WB10TJ
Designation	D _N	Threads per inch	D _c mm	l ₂₁ mm	L _c mm	l ₄ mm	l ₁ mm	h ₆	Z		
TC620-UNC5/16-W5D-	UNC 5/16-18	18	6,1	2,82	16,9	27	63	8	4	☺	
TC620-UNC3/8-W5D-	UNC 3/8-16	16	7,4	3,18	19,1	32	68	8	4	☺	
TC620-UNC1/2-W5D-	UNC 1/2-13	13	10,1	3,91	25,4	38	83	12	4	☺	
TC620-UNC5/8-W5D-	UNC 5/8-11	11	12,7	4,62	32,3	52	100	16	4	☺	
DIN 6535 HB TC620-UNC3/4-W5D-	UNC 3/4-10	10	15,5	5,08	38,1	52	100	16	5	☺	

Ordering example for the grade WB10TJ: TC620-UNC1/2-W5D-WB10TJ


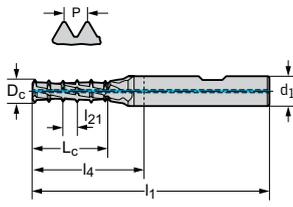


Multiple-row thread milling cutters

TC620 Supreme




- Universal multiple-row thread milling cutters
- For high cutting speeds and high feeds per tooth

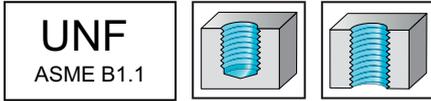

	P	M	K	N	S	H	O
WB10TJ	●●	●●	●●	●●	●●	●●	●

Tool

Designation	D _N	Threads per inch	D _c mm	l _{z1} mm	l _c mm	l ₄ mm	l ₁ mm	h ₆	Z	WB10TJ
TC620-UNF10-W1D-	UNF #10-32	32	3,7	1,59	10,3	21	57	6	3	☺
TC620-UNF1/4-W1D-	UNF 1/4-28	28	5,1	1,81	12,7	21	57	6	4	☺

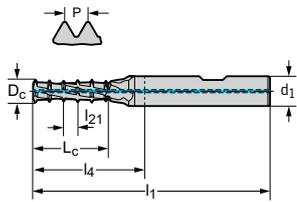

DIN 6535 HB

Ordering example for the grade WB10TJ: TC620-UNF1/4-W1D-WB10TJ

C3

WALTER SELECT ●● Primary application ● Other application



Best tool for → Good = ☺ → Average = ☹ → Poor = ☹☹ machining conditions

Multiple-row thread milling cutters

TC620 Supreme



- Universal multiple-row thread milling cutters
- For high cutting speeds and high feeds per tooth

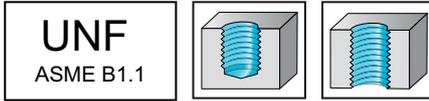

	P	M	K	N	S	H	O
WB10TJ	●●	●●	●●	●●	●●		●

Tool											WB10TJ
Designation	D _N	Threads per inch	D _c mm	l ₂₁ mm	L _c mm	l ₄ mm	l ₁ mm	h ₆	Z		
TC620-UNF5/16-W5D-	UNF 5/16-24	24	6,4	2,12	15,9	27	63	8	4	☹	
TC620-UNF3/8-W5D-	UNF 3/8-24	24	7,9	2,12	19,1	31	67	8	5	☹	
TC620-UNF7/16-W5D-	UNF 7/16-20	20	9,2	2,54	22,9	32	72	10	5	☹	
TC620-UNF1/2-W5D-	UNF 1/2-20	20	10,7	2,54	25,4	38	83	12	5	☹	
TC620-UNF9/16-W5D-	UNF 9/16-18	18	12	2,82	29,6	45	90	12	5	☹	
TC620-UNF5/8-W5D-	UNF 5/8-18	18	13,5	2,82	32,5	48	96	16	6	☹	
TC620-UNF3/4-W5D-	UNF 3/4-16	16	16,4	3,18	38,1	56	104	18	6	☹	

DIN 6535 HB

Ordering example for the grade WB10TJ: TC620-UNF1/2-W5D-WB10TJ

C3

WALTER SELECT ●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = ☹ machining conditions


Solid carbide thread milling cutters

mm

TME



- Universal thread milling cutter for external thread




	P	M	K	N	S	H	O
TICN	●●	●●	●●	●●	●●	●●	●

Tool

Designation	D _N	D _c mm	L _c mm	l ₁ mm	l ₄ mm	h ₆	Z
H5150106-M10X1	MF 10X1	10	16	72	32	10	4
H5150106-M12X1.5	MF 12X1.5	12	22,5	83	38	12	5
H5150106-M16X1	MF 16X1	16	30	92	44	16	6
H5150106-M16X1.25	MF 16X1.25	16	30	92	44	16	6
H5150106-M16X1.5	MF 16X1.5	16	30	92	44	16	6
H5150106-M16X2	MF 16X2	16	30	92	44	16	6

DIN 6535 HB

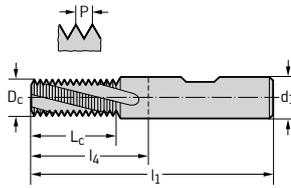

C3

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions



Solid carbide thread milling cutters

mm

TMG HRC



– Thread milling cutters for hardened materials

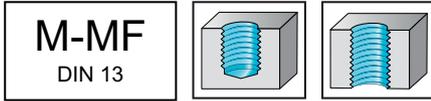

	P	M	K	N	S	H	O
TAX	●●		●●		●	●●	●

Tool		Designation	D _N	D _c mm	L _c mm	l ₁ mm	l ₄ mm	h6	Z
		H5033008-M6	M 6	4,5	10	57	21	6	4
		H5033008-M8	M 8	6	12,5	57	21	6	5
		H5033008-M10	M 10	8	16,5	63	27	8	5
		H5033008-M12	M 12	9	19,3	72	32	10	5
		H5033008-M16	M 16	12	26	83	38	12	5

DIN 6535 HA

C3

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions



Solid carbide thread milling cutters

mm

TMG HRC



- Thread milling cutters for hardened materials

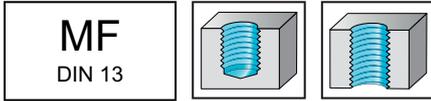

	P	M	K	N	S	H	O
TAX	●●		●●		●	●●	●

Tool		Designation	D _N	D _c mm	L _c mm	l ₁ mm	l ₄ mm	h ₆	Z
		H5133008-M12X1	MF 12X1	10	20	72	32	10	5
		H5133008-M14X1.5	MF 14X1.5	12	27	83	38	12	6

DIN 6535 HA

C3

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


Solid carbide thread milling cutters

mm

TMG Ni




– Thread milling cutters for nickel alloys

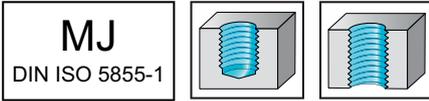

TICN	P	M	K	N	S	H	O
	●●	●●	●	●	●●		●

Tool

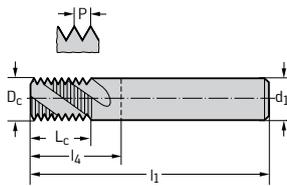

DIN 6535 HA

Designation	D _N	D _c mm	L _c mm	l ₁ mm	l ₄ mm	h ₆	Z
H5036006-MJ4	MJ 4	3	6,3	54	18	6	3
H5036006-MJ5	MJ 5	3,9	8	54	18	6	3
H5036006-MJ6	MJ 6	4,8	9	54	20	6	3

C3

**WALTER
SELECT**

●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions



Solid carbide thread milling cutters

mm

TMG Ni




- Thread milling cutters for nickel alloys

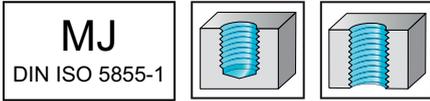

	P	M	K	N	S	H	O
TICN	●●	●●	●	●	●●	●	●

Tool

Designation	D _N	D _c mm	L _c mm	l ₁ mm	l ₄ mm	h6	Z
H5036016-MJ8	MJ 8	6,3	12,5	58	22	8	4
H5036016-MJ10	MJ 10	7,5	15	58	22	8	4

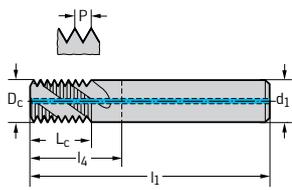

DIN 6535 HA

C3

WALTER SELECT ●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


Solid carbide thread milling cutters

mm

TMG Ni



- Thread milling cutters for nickel alloys

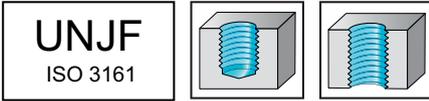

	P	M	K	N	S	H	O
TICN	●●	●●	●	●	●●	●	●

Tool		Designation	Threads per inch	D _N	D _c mm	L _c mm	l ₁ mm	l ₄ mm	h6	Z
		H5336006-UNJF10	32	UNJF #10-32	3,6	7,9	54	18	6	3
		H5336006-UNJF1/4	28	UNJF 1/4-28	4,8	10	54	18	6	3

DIN 6535 HA

C3

WALTER SELECT
●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions



Solid carbide thread milling cutters

mm

TMG Ni




- Thread milling cutters for nickel alloys

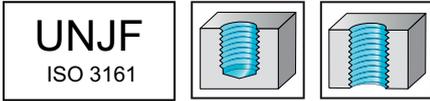

	P	M	K	N	S	H	O
TICN	●●	●●	●	●	●●	●	●

Tool

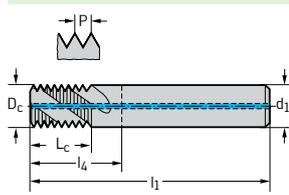

Designation	Threads per inch	D _N	D _c mm	L _c mm	l ₁ mm	l ₄ mm	h6	Z
H5336016-UNJF5/16		UNJF 5/16-24	6,2	12,7	58	22	8	3
H5336016-UNJF3/8		UNJF 3/8-24	8	14,8	58	22	8	3
H5336016-UNJF7/16		UNJF 7/16-20	9,2	17,8	72	26	10	4
H5336016-UNJF1/2		UNJF 1/2-20	10,5	19,1	73	28	12	4

DIN 6535 HA

C3

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


Solid carbide thread milling cutters

mm



TMG



– Universal thread milling cutters



NPT
ASME B1.20.1



TICN	P	M	K	N	S	H	O
	●●	●●	●●	●●	●●		●

Tool		Designation	D _N	D _c mm	L _c mm	l ₁ mm	l ₄ mm	h ₆	Z
		H5551106-NPT1/16	NPT 1/16-27	5,5	11,03	57	21	6	3
		H5551106-NPT1/8	NPT 1/8-27	7,9	11,03	58	22	8	3
		H5551106-NPT1/4-3/8	NPT 1/4-3/8-18	9,9	15,21	66	26	10	3
		H5551106-NPT1/2-3/4	NPT 1/2-3/4-14	15,9	19,55	82	34	16	4
		H5551106-NPT1-2	NPT 1-2-1/2	19,9	26,02	92	42	20	5

DIN 6535 HB

C3

WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = ☹️ machining conditions



Solid carbide thread milling cutters

mm

TMG



– Universal thread milling cutters

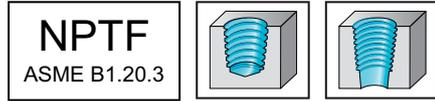


	P	M	K	N	S	H	O
TICN	●●	●●	●●	●●	●●	●●	●

Tool		Designation	D _N	D _c mm	L _c mm	l ₁ mm	l ₄ mm	h ₆	Z
		H5651106-NPTF1/16	NPTF 1/16-27	5,5	11,03	57	21	6	3
		H5651106-NPTF1/8	NPTF 1/8-27	7,9	11,03	58	22	8	3
		H5651106-NPTF1/4-3/8	NPTF 1/4-3/8-18	9,9	15,21	66	26	10	3
		H5651106-NPTF1/2-3/4	NPTF 1/2-3/4-14	15,9	19,55	82	34	16	4
		H5651106-NPTF1-2	NPTF 1-2-1/2	19,9	26,02	92	42	20	5

DIN 6535 HB

C3


WALTER SELECT ●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

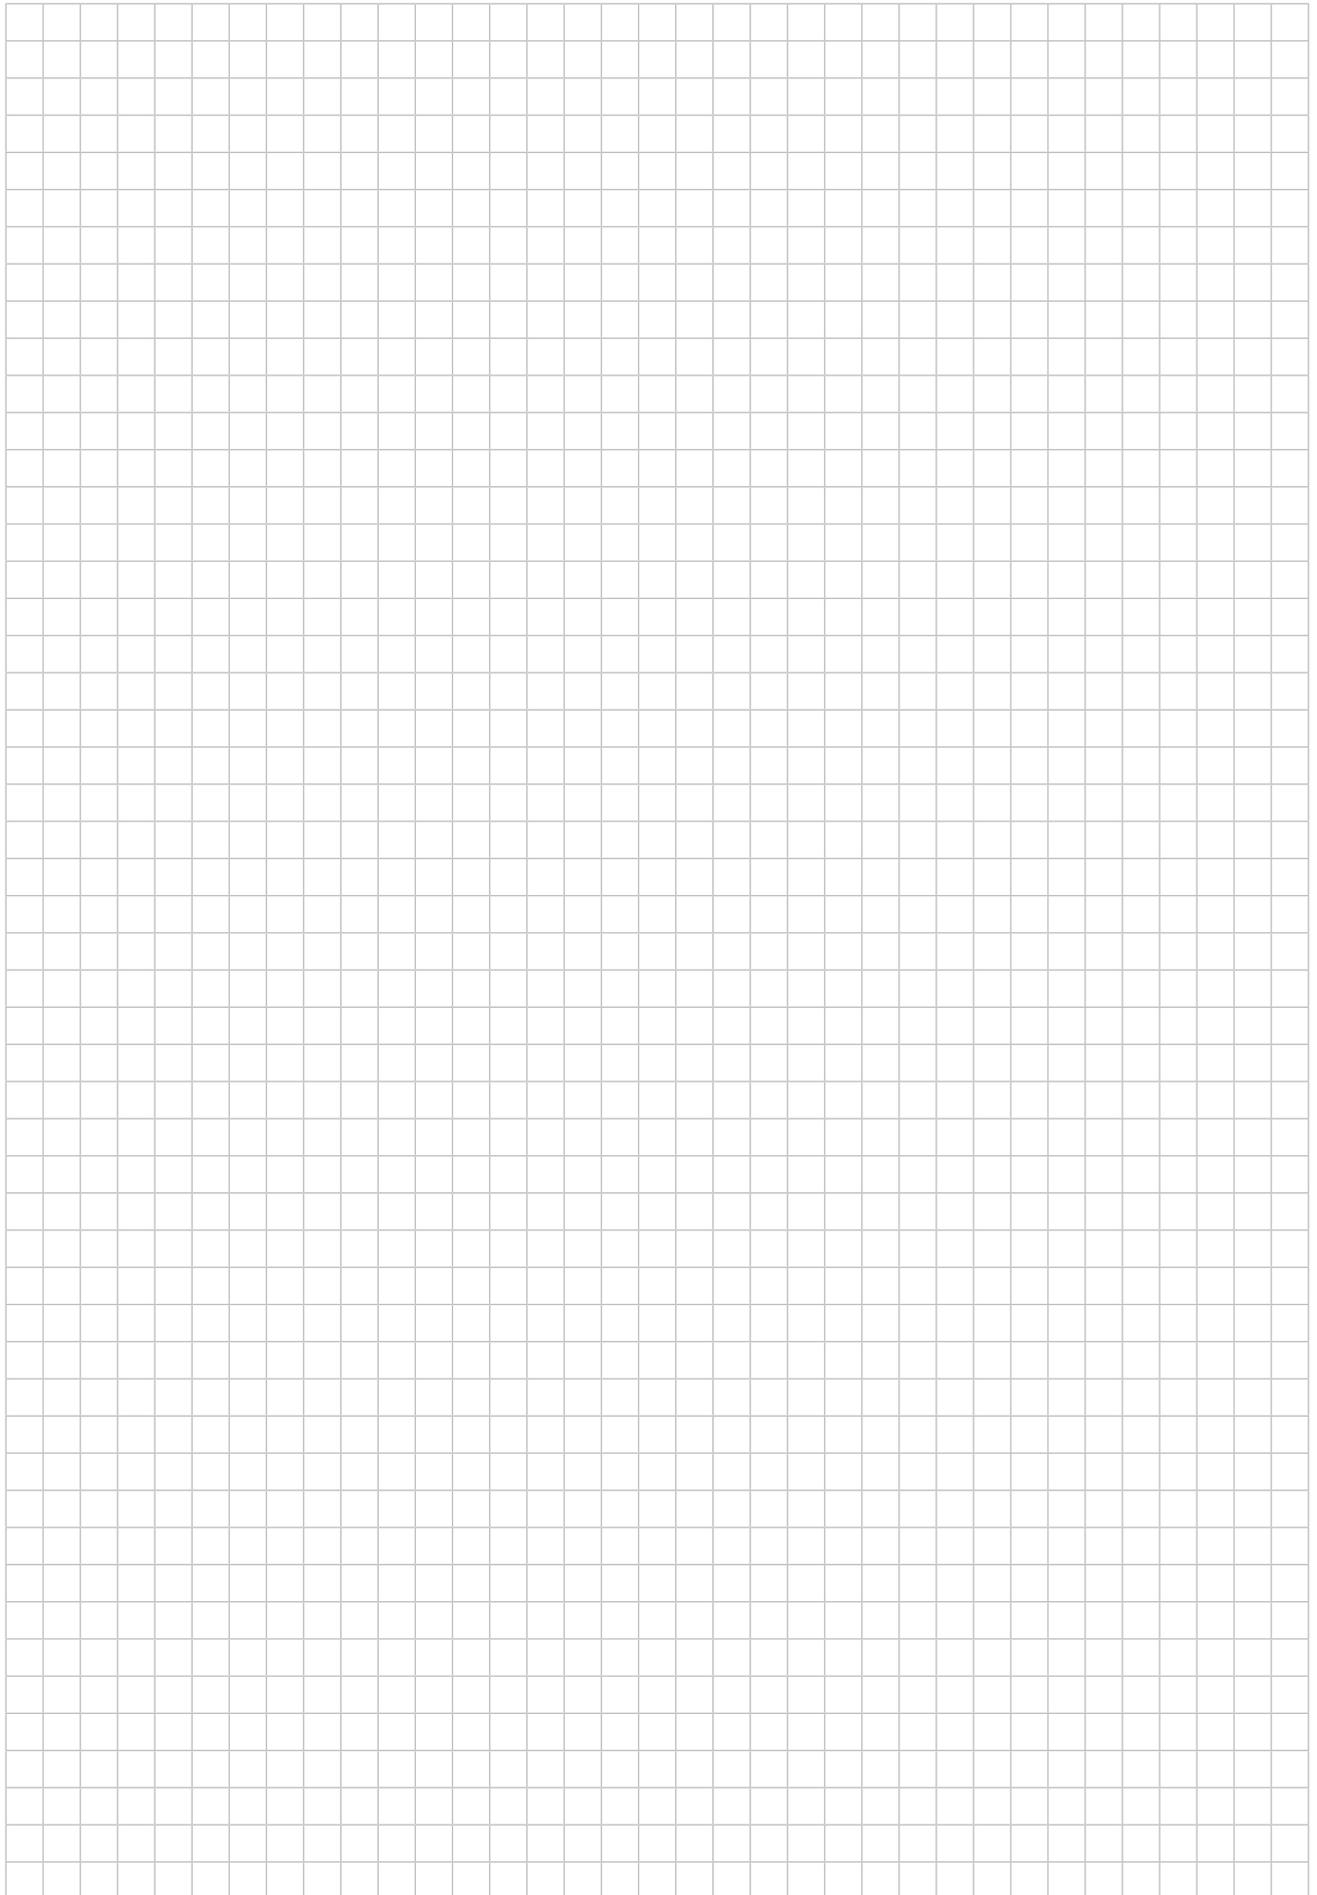

C3

Orbital thread milling cutters

Machining



Thread depth

 $2 \times D_N$
 $2 \times D_N$
 $2,5 \times D_N$
 $3 \times D_N$
 $4 \times D_N$


Designation

TC630 Supreme

TMO HRC

TC630 Supreme

TC630 Supreme

TC630 Supreme

Thread type

M

✓

✓

✓

✓

✓

MF

✓

✓

✓

✓

✓

UNC / UNF / UN-8

✓

✓

G / Rc / Rp

MJ / UNJC / UNJF

NPT / NPTF

Pg / BSW / Tr

Indexable inserts basic shape

✓

✓

✓

✓

✓

Tolerance

Coolant supply

External / axial

External

External

External / axial

axial

Chamfer form

Coating / grade

WB10RA / WB10TJ

TAX

WB10TJ

WB10TJ

WB10TJ

Cutting tool material

VHM

VHM

VHM

VHM

VHM

P Steel

●●

●●

●●

●●

●●

M Stainless steel

●●

●●

●●

●●

●●

K Cast iron

●●

●●

●●

●●

●●

N NF metals

●●

●●

●●

●●

●●

S Materials with difficult cutting properties

●●

●

●●

●●

●●

H Hard materials

●●

●●

●●

●●

●●

O Other

●

●

●

●

●

Page in catalogue

C 409

C 425

C 411

C 417

C 424

QR code


www.walter-tools.com/woc/

TC630

tmo-hrc

TC630

TC630



TC630

Solid carbide orbital thread mills

TC630 Supreme



– Universal orbital thread milling cutters

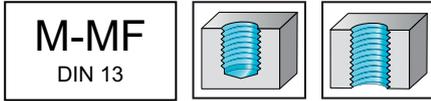

	P	M	K	N	S	H	O
WB10TJ	●●	●●	●●	●●	●●		●

Tool		Designation	D _N	P mm	D _c mm	L _c mm	l ₃ mm	l ₁ mm	l ₄ mm	h6	Z	WB10TJ
<p>DIN 6535 HA</p>		TC630-M1.6-A0D-	M 1.6	0,35	1,2	0,7	3,73	38	10	3	4	●●
		TC630-M1.8-A0D-	M 1.8	0,35	1,35	0,7	3,78	38	10	3	4	●●
		TC630-M2-A0D-	M 2	0,4	1,55	1,2	4,6	57	21	6	4	●●
		TC630-M2.2-A0D-	M 2.2	0,45	1,65	1,35	4,63	57	21	6	4	●●
		TC630-M2.5-A0D-	M 2.5	0,45	1,95	1,35	5,68	57	21	6	4	●●
		TC630-M3-A0D-	M 3	0,5	2,3	1,5	6,75	57	21	6	4	●●
		TC630-M3.5-A0D-	M 3.5	0,6	2,7	1,8	7,3	57	21	6	4	●●
		TC630-M4-A0D-	M 4	0,7	3,1	2,1	9,05	57	21	6	4	●●
		TC630-M4.5-A0D-	M 4.5	0,75	3,5	2,25	9,38	57	21	6	4	●●
		TC630-M5-A0D-	M 5	0,8	4	2,4	11,2	57	21	6	4	●●
		TC630-M6-A0D-	M 6	1	4,8	3	13,5	57	21	6	4	●●
		TC630-M8-A0D-	M 8	1,25	6,4	3,75	17,9	63	27	8	4	●●
		TC630-M10-A0D-	M 10	1,5	8,2	4,5	22,3	72	32	10	5	●●
	TC630-M12-A0D-	M 12	1,75	9,75	5,25	26,7	72	32	10	5	●●	

Ordering example for the grade WB10TJ: TC630-M1.6-A0D-WB10TJ

**WALTER
SELECT**

●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions



C3

Solid carbide orbital thread mills

TC630 Supreme




- Universal orbital thread milling cutters

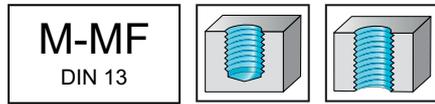

	P	M	K	N	S	H	O
WB10TJ	●●	●●	●●	●●	●●	●●	●

Tool											WB10TJ
Designation	D_N	P mm	D_c mm	L_c mm	l_3 mm	l_1 mm	l_4 mm	h6	Z		
TC630-M5-A1D-	M 5	0,8	4	2,4	11,2	57	21	6	4	●●	
TC630-M6-A1D-	M 6	1	4,8	3	13,5	57	21	6	4	●●	
TC630-M8-A1D-	M 8	1,25	6,4	3,75	17,9	63	27	8	4	●●	
TC630-M10-A1D-	M 10	1,5	8,2	4,5	22,3	72	32	10	5	●●	
TC630-M12-A1D-	M 12	1,75	9,75	5,25	26,7	72	32	10	5	●●	

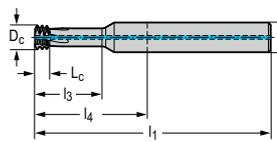

DIN 6535 HA

Ordering example for the grade WB10TJ: TC630-M10-A1D-WB10TJ

C3

WALTER SELECT

●● Primary application ● Other application


Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

Solid carbide orbital thread mills

TC630 Supreme




- Universal orbital thread milling cutters

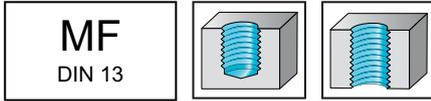

	P	M	K	N	S	H	O
WB10TJ	●●	●●	●●	●●	●●		●

Tool											WB10TJ
Designation	D _N	P mm	D _c mm	L _c mm	l ₃ mm	l ₁ mm	l ₄ mm	h6	Z		
TC630-M5X0.5-A0E-	M 5X0.5	0,5	4,3	1,5	12,75	57	21	6	4	☼	
TC630-M6X0.75-A0E-	M 6X0.75	0,75	5	2,25	15,38	57	21	6	4	☼	
TC630-M10X1-A0E-	M 10X1	1	8,55	3	25,5	72	32	10	5	☼	
TC630-M10X1.25A0E-	M 10X1.25	1,25	8,35	3,75	25,63	72	32	10	5	☼	
TC630-M14X1-A0E-	M 14X1	1	12	3	35,5	83	38	12	5	☼	
TC630-M14X1.5-A0E-	M 14X1.5	1,5	11,9	4,5	35,75	83	38	12	5	☼	

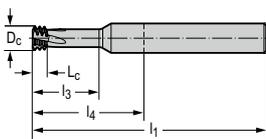

DIN 6535 HA

Ordering example for the grade WB10TJ: TC630-M10X1-A0E-WB10TJ

C3

WALTER SELECT ●● Primary application ● Other application


Best tool for → Good = 😊 → Average = 😐 → Poor = ☹️ machining conditions

Solid carbide orbital thread mills

TC630 Supreme



- Specialist for aerospace industry
- Ideal for engine components

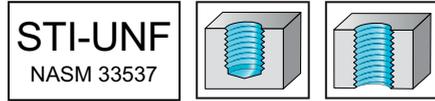

	P	M	K	N	S	H	O
WB10RA	●	●●	●	●	●●		●

Tool											WB10RA
Designation	D _N -P	Threads per inch	D _c mm	L _c mm	l ₃ mm	l ₁ mm	l ₄ mm	h6	Z		
TC630-SUNF10-A0D-	STIUNF #10-32	32	4,85	2,38	12,12	57	21	6	4	☹	
TC630-SUNF1/4-A0D-	STIUNF 1/4-28	28	6,3	2,72	15,52	63	27	8	4	☹	
TC630-SUNF5/16A0D-	STIUNF 5/16-24	24	7,85	3,17	19,16	63	27	8	5	☹	
DIN 6535 HA TC630-SUNF3/8-A0D-	STIUNF 3/8-24	24	9,35	3,17	22,33	72	32	10	5	☹	

Ordering example for the grade WB10RA: TC630-SUNF1/4-A0D-WB10RA

C3

WALTER SELECT ●● Primary application ● Other application


Best tool for → Good = 😊 → Average = 😐 → Poor = ☹ machining conditions

Solid carbide orbital thread mills

TC630 Supreme




– Universal orbital thread milling cutters

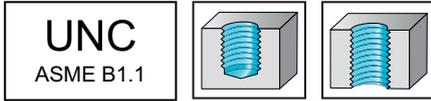

	P	M	K	N	S	H	O
WB10TJ	●●	●●	●●	●●	●●		●

Tool											WB10TJ
Designation	D _N -P	Threads per inch	D _c mm	L _c mm	l ₃ mm	l ₁ mm	l ₄ mm	h6	Z		
TC630-UNC1-A0D-	UNC #1-64	64	1,4	0,79	3,91	38	10	3	4	●●	
TC630-UNC2-A0D-	UNC #2-56	56	1,6	1,36	4,59	57	21	6	4	●●	
TC630-UNC4-A0D-	UNC #4-40	40	2,1	1,91	6,7	57	21	6	4	●●	
TC630-UNC6-A0D-	UNC #6-32	32	2,6	2,38	8,3	57	21	6	4	●●	
TC630-UNC8-A0D-	UNC #8-32	32	3,25	2,38	8,73	57	21	6	4	●●	
TC630-UNC10-A0D-	UNC #10-24	24	3,55	3,18	11,3	57	21	6	4	●●	

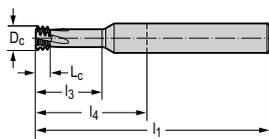

DIN 6535 HA

Ordering example for the grade WB10TJ: TC630-UNC1-A0D-WB10TJ

WALTER SELECT

●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions



C3

Solid carbide orbital thread mills

TC630 Supreme




- Universal orbital thread milling cutters

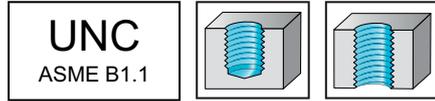

	P	M	K	N	S	H	O
WB10TJ	●●	●●	●●	●●	●●		●

Tool											WB10TJ
Designation	D _N -P	Threads per inch	D _c mm	L _c mm	l ₃ mm	l ₁ mm	l ₄ mm	h6	Z		
TC630-UNC1/4-A1D-	UNC 1/4-20	20	4,85	3,81	14,7	57	21	6	4	☹	
TC630-UNC5/16-A1D-	UNC 5/16-18	18	6,2	4,23	18,1	63	27	8	4	☹	

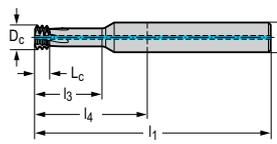

DIN 6535 HA

Ordering example for the grade WB10TJ: TC630-UNC1/4-A1D-WB10TJ

C3

WALTER SELECT ●● Primary application ● Other application


Best tool for → Good = 😊 → Average = 😐 → Poor = ☹ machining conditions

Solid carbide orbital thread mills

TC630 Supreme



- Universal orbital thread milling cutters

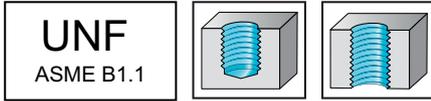

	P	M	K	N	S	H	O
WB10TJ	●●	●●	●●	●●	●●		●

Tool											WB10TJ
Designation	D _{N-P}	Threads per inch	D _c mm	L _c mm	l ₃ mm	l ₁ mm	l ₄ mm	h6	Z		
 TC630-UNF10-A0D- UNF #10-32		32	3,85	2,38	10,9	57	21	6	4	●●	
DIN 6535 HA											

Ordering example for the grade WB10TJ: TC630-UNF10-A0D-WB10TJ

C3

WALTER SELECT



 ●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = ☹️ machining conditions

Solid carbide orbital thread mills

TC630 Supreme




- Universal orbital thread milling cutters

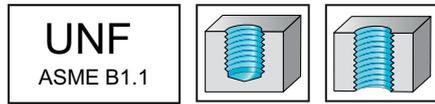

	P	M	K	N	S	H	O
WB10TJ	●●	●●	●●	●●	●●	●●	●

Tool											WB10TJ
Designation	D _N -P	Threads per inch	D _c mm	L _c mm	l ₃ mm	l ₁ mm	l ₄ mm	h ₆	Z		
TC630-UNF1/4-A1D-	UNF 1/4-28	28	5,25	2,72	14,1	57	21	6	4	☹	
TC630-UNF5/16-A1D-	UNF 5/16-24	24	6,55	3,18	17,5	63	27	8	4	☹	
TC630-UNF3/8-A1D-	UNF 3/8-24	24	8	3,18	20,7	63	27	8	5	☹	

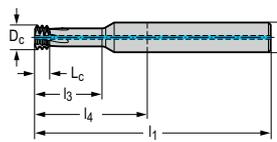

DIN 6535 HA

Ordering example for the grade WB10TJ: TC630-UNF1/4-A1D-WB10TJ

C3


WALTER SELECT ●● Primary application ● Other application
 Best tool for → Good = 😊 → Average = 😐 → Poor = ☹ machining conditions

Solid carbide orbital thread mills

TC630 Supreme



– Universal orbital thread milling cutters

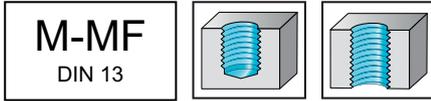

	P	M	K	N	S	H	O
WB10TJ	●●	●●	●●	●●	●●		●

Tool	Designation	D _N	P mm	D _c mm	L _c mm	l ₃ mm	l ₁ mm	l ₄ mm	h6	Z	WB10TJ
<p>DIN 6535 HA</p>	TC630-M1.6-A0F-	M 1.6	0,35	1,2	0,7	5,33	38	10	3	4	●●
	TC630-M1.8-A0F-	M 1.8	0,35	1,35	0,7	5,58	38	10	3	4	●●
	TC630-M2-A0F-	M 2	0,4	1,55	1,2	6,6	57	21	6	4	●●
	TC630-M2.2-A0F-	M 2.2	0,45	1,65	1,35	6,83	57	21	6	4	●●
	TC630-M2.5-A0F-	M 2.5	0,45	1,95	1,35	8,18	57	21	6	4	●●
	TC630-M3-A0F-	M 3	0,5	2,3	1,5	9,75	57	21	6	4	●●
	TC630-M3.5-A0F-	M 3.5	0,6	2,7	1,8	10,8	57	21	6	4	●●
	TC630-M4-A0F-	M 4	0,7	3,1	2,1	13,05	57	21	6	4	●●
	TC630-M4.5-A0F-	M 4.5	0,75	3,5	2,25	13,88	57	21	6	4	●●
	TC630-M5-A0F-	M 5	0,8	4	2,4	16,2	57	21	6	4	●●
	TC630-M6-A0F-	M 6	1	4,8	3	19,5	57	22	6	4	●●
	TC630-M8-A0F-	M 8	1,25	6,4	3,75	25,88	63	29	8	4	●●

Ordering example for the grade WB10TJ: TC630-M1.6-A0F-WB10TJ

WALTER SELECT ●● Primary application ● Other application



Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

Solid carbide orbital thread mills

TC630 Supreme




- Universal orbital thread milling cutters

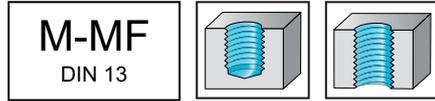

	P	M	K	N	S	H	O
WB10TJ	●●	●●	●●	●●	●●	●●	●

Tool											WB10TJ
Designation	D _N	P mm	D _c mm	L _c mm	l ₃ mm	l ₁ mm	l ₄ mm	h ₆	Z		
TC630-M5-A1F-	M 5	0,8	4	2,4	16,2	57	21	6	4	●●	
TC630-M6-A1F-	M 6	1	4,8	3	19,5	57	22	6	4	●●	
TC630-M8-A1F-	M 8	1,25	6,4	3,75	25,88	63	29	8	4	●●	

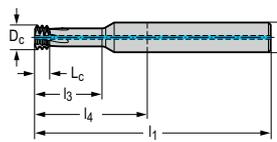

DIN 6535 HA

Ordering example for the grade WB10TJ: TC630-M5-A1F-WB10TJ

C3

WALTER SELECT

●● Primary application ● Other application



Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

Solid carbide orbital thread mills

TC630 Supreme



- Universal orbital thread milling cutters
- Best running smoothness due to Walter DeVibe technology

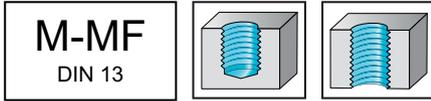

	P	M	K	N	S	H	O
WB10TJ	●●	●●	●●	●●	●●		●

Tool		Designation	D _N	P mm	D _c mm	L _c mm	l ₃ mm	l ₁ mm	l ₄ mm	h6	Z	WB10TJ
<p>DIN 6535 HA</p>		TC630-M8-A5F-	M 8	1,25	6,4	3,75	25,88	63	29	8	4	●●
		TC630-M10-A5F-	M 10	1,5	8,2	4,5	30,75	72	34	10	5	●●
		TC630-M12-A5F-	M 12	1,75	9,75	5,25	36,88	80	40	10	5	●●
		TC630-M14-A5F-	M 14	2	11,4	6	43	92	47	12	5	●●
		TC630-M16-A5F-	M 16	2	13,3	6	49	102	54	16	6	●●
		TC630-M18-A5F-	M 18	2,5	14,75	7,5	55,25	108	60	16	6	●●


Ordering example for the grade WB10TJ: TC630-M10-A5F-WB10TJ

Solid carbide orbital thread mills

TC630 Supreme



- Universal orbital thread milling cutters

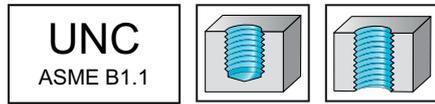

	P	M	K	N	S	H	0
WB10TJ	●●	●●	●●	●●	●●	●●	●

Tool	Designation	D _N -P	Threads per inch	D _c mm	L _c mm	l ₃ mm	l ₁ mm	l ₄ mm	h6	Z	WB10TJ
<p>DIN 6535 HA</p>	TC630-UNC1-A0F-	UNC #1-64	64	1,4	0,79	5,76	38	10	3	4	●●
	TC630-UNC2-A0F-	UNC #2-56	56	1,6	1,36	7,25	57	21	6	4	●●
	TC630-UNC3-A0F-	UNC #3-48	48	1,85	1,59	7,81	57	21	6	4	●●
	TC630-UNC4-A0F-	UNC #4-40	40	2,1	1,91	9,5	57	21	6	4	●●
	TC630-UNC6-A0F-	UNC #6-32	32	2,6	2,38	11,75	57	21	6	4	●●
	TC630-UNC8-A0F-	UNC #8-32	32	3,25	2,38	13,7	57	21	6	4	●●
	TC630-UNC10-A0F-	UNC #10-24	24	3,55	3,18	16,1	57	21	6	4	●●
	TC630-UNC1/4-A0F-	UNC 1/4-20	20	4,85	3,81	21	57	24	6	4	●●
	TC630-UNC5/16-A0F-	UNC 5/16-18	18	6,2	4,23	25,95	63	29	8	4	●●

Ordering example for the grade WB10TJ: TC630-UNC1-A0F-WB10TJ

C3

WALTER SELECT ●● Primary application ● Other application



Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

Solid carbide orbital thread mills

TC630 Supreme




- Universal orbital thread milling cutters
- Best running smoothness due to Walter DeVibe technology

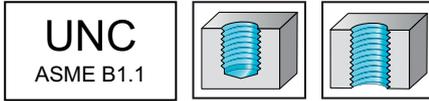

	P	M	K	N	S	H	O
WB10TJ	●●	●●	●●	●●	●●		●

Tool											WB10TJ
Designation	D _N -P	Threads per inch	D _c mm	L _c mm	l ₃ mm	l ₁ mm	l ₄ mm	h6	Z		
TC630-UNC5/16-A5F-	UNC 5/16-18	18	6,2	4,23	25,95	63	29	8	4	☼	
TC630-UNC3/8-A5F-	UNC 3/8-16	16	7,55	4,76	29,37	68	32	8	5	☼	
TC630-UNC1/2-A5F-	UNC 1/2-13	13	10,25	5,86	39,08	89	44	12	5	☼	
TC630-UNC5/8-A5F-	UNC 5/8-11	11	12,9	6,93	48,78	103	55	16	5	☼	
TC630-UNC3/4-A5F-	UNC 3/4-10	10	15,7	7,62	58,42	110	62	16	6	☼	

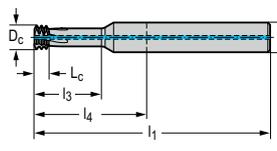

DIN 6535 HA

Ordering example for the grade WB10TJ: TC630-UNC1/2-A5F-WB10TJ

C3

WALTER SELECT ●● Primary application ● Other application


Best tool for → Good = 😊 → Average = 😐 → Poor = ☼ machining conditions

Solid carbide orbital thread mills

TC630 Supreme



- Universal orbital thread milling cutters

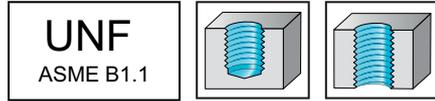

	P	M	K	N	S	H	0
WB10TJ	●●	●●	●●	●●	●●	●●	●

Tool	Designation	D _N -P	Threads per inch	D _c mm	L _c mm	l ₃ mm	l ₁ mm	l ₄ mm	h6	Z	WB10TJ
<p>DIN 6535 HA</p>	TC630-UNF1-A0F-	UNF #1-72	72	1,4	0,71	5,74	38	10	3	4	●●
	TC630-UNF5-A0F-	UNF #5-44	44	2,45	1,73	9,82	57	21	6	4	●●
	TC630-UNF6-A0F-	UNF #6-40	40	2,75	1,91	11,5	57	21	6	4	●●
	TC630-UNF8-A0F-	UNF #8-36	36	3,25	2,12	12,85	57	21	6	4	●●
	TC630-UNF10-A0F-	UNF #10-32	32	3,85	2,38	15,7	57	21	6	4	●●
	TC630-UNF1/4-A0F-	UNF 1/4-28	28	5,25	2,72	20,45	57	22	6	4	●●
	TC630-UNF5/16-A0F-	UNF 5/16-24	24	6,55	3,18	25,4	63	28	8	4	●●

Ordering example for the grade WB10TJ: TC630-UNF1-A0F-WB10TJ

C3

WALTER SELECT ●● Primary application ● Other application



Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

Solid carbide orbital thread mills

TC630 Supreme



- Universal orbital thread milling cutters
- Best running smoothness due to Walter DeVibe technology

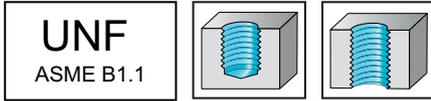

	P	M	K	N	S	H	O
WB10TJ	●●	●●	●●	●●	●●		●

Tool											WB10TJ
Designation	D _N -P	Threads per inch	D _c mm	L _c mm	l ₃ mm	l ₁ mm	l ₄ mm	h6	Z		
TC630-UNF7/16-A5F-	UNF 7/16-20	20	9,4	3,81	33,98	77	37	10	5	☼	
TC630-UNF9/16-A5F-	UNF 9/16-18	18	12	4,23	43,57	91	46	12	5	☼	
TC630-UNF3/4-A5F-	UNF 3/4-16	16	16,6	4,76	57,95	110	62	18	6	☼	

DIN 6535 HA



Ordering example for the grade WB10TJ: TC630-UNF3/4-A5F-WB10TJ

Solid carbide orbital thread mills

TC630 Supreme



- Universal orbital thread milling cutters
- Best running smoothness due to Walter DeVibe technology

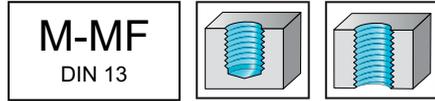

	P	M	K	N	S	H	0
WB10TJ	●●	●●	●●	●●	●●		●

Tool											WB10TJ
Designation	D _N	P mm	D _c mm	L _c mm	l ₃ mm	l ₁ mm	l ₄ mm	h8	Z		
TC630-M8-A5H-	M 8	1,25	6,4	3,75	32,63	72	36	8	4	●●	
TC630-M10-A5H-	M 10	1,5	8,2	4,5	40,75	85	45	10	5	●●	
TC630-M12-A5H-	M 12	1,75	9,75	5,25	48,88	92	52	10	5	●●	
TC630-M16-A5H-	M 16	2	13,3	6	65	115	70	16	6	●●	

DIN 6535 HA

Ordering example for the grade WB10TJ: TC630-M10-A5H-WB10TJ

C3

WALTER SELECT ●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions


Solid carbide orbital thread mills

mm

TMO HRC



– Orbital thread milling cutters for hardened materials

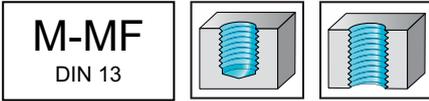

	P	M	K	N	S	H	O
TAX	●●		●●		●	●●	●

Tool		P	D _c	L _c	l ₃	d ₂	l ₁	l ₄	h6	Z
Designation		mm	mm	mm	mm	mm	mm	mm		
<p>DIN 6535 HA</p>	H5083008-M2	0,4	1,55	0,6	4,6	0,98	57	21	6	3
	H5083008-M2.5	0,45	1,95	0,68	5,675	1,3	57	21	6	3
	H5083008-M3	0,5	2,3	0,75	6,75	1,6	57	21	6	3
	H5083008-M4	0,7	3,1	1,05	9,05	2,1	57	21	6	3
	H5083008-M5	0,8	4	1,2	11,2	2,9	57	21	6	4
	H5083008-M6	1	4,8	1,5	13,5	3,4	57	21	6	4

C3


WALTER SELECT

●● Primary application ● Other application

Best tool for → Good = 😊 → Average = 😐 → Poor = 😞 machining conditions

Thread milling cutters with indexable insert

Machining



Thread depth

 $1,5 \times D_N$
 $2 \times D_N$
 $2,5 \times D_N$
 $2,5 \times D_N$
 $3 \times D_N$


Designation

T2710

T2711

T2712

T2712

T2713

Thread type

M

✓

✓

✓

✓

✓

MF

✓

✓

✓

✓

✓

UNC / UNF / UN-8

✓

✓

✓

✓

✓

G / Rc / Rp

✓

✓

✓

MJ / UNJC / UNJF

NPT / NPTF

Pg / BSW / Tr

Indexable inserts basic shape

✓

✓

✓

✓

✓

Tolerance

Coolant supply

radial

radial

radial

radial

radial

Chamfer form

Coating / grade

Cutting tool material

Stahl

Stahl

Stahl

Stahl

Stahl

P Steel

●●

●●

●●

●●

●●

M Stainless steel

●●

●●

●●

●●

●●

K Cast iron

●●

●●

●●

●●

●●

N NF metals

●

●

●

●

●

S Materials with difficult cutting properties

●●

●●

●●

●●

●●

H Hard materials

●

●

●

●

●

O Other

●

●

●

●

●

Page in catalogue

C 428

C 432

C 440

C 436

C 444

QR code


www.walter-tools.com/woc/

T2710

T2711

T2712

T2712

T2713

Thread milling cutters with indexable insert

Machining		
Thread depth	3 x D _N	



Designation	T2713	Tiger-tec® Silver
Thread type		
M	✓	
MF	✓	
UNC / UNF / UN-8	✓	
G / Rc / Rp	✓	✓
MJ / UNJC / UNJF		
NPT / NPTF		
Pg / BSW / Tr		
Indexable inserts basic shape	✓	
Tolerance		
Coolant supply	radial	
Chamfer form		
Coating / grade		WSM37S
Cutting tool material	Stahl	
P Steel	●●	●●
M Stainless steel	●●	●●
K Cast iron	●●	●●
N NF metals	●	●
S Materials with difficult cutting properties	●●	●●
H Hard materials	●	●
O Other	●	
Page in catalogue	C 444	C 446
QR code		
www.walter-tools.com/woc/	T2713	



C3

Indexable insert thread milling cutter

T2710 mm



- Universal indexable insert thread milling cutter
- Radius correction values: Walter GPS/Technical information

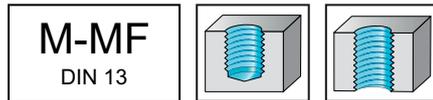

	P	M	K	N	S	H	O
T2710	●	●	●	●	●	●	●

Tool	Designation	D _N	P _{max} mm	D _c mm	l ₂₁ mm	l ₃ mm	l ₁ mm	d ₁ mm	Z	Number of cutting edges	Type
 DIN 1835 B	T2710-17-W16-3-06-2-15	M 20	2,5	16,5	15	33	88	16	3	6	P26300-06 ..
	T2710-19-W20-3-06-3-12	M 24	3	19	12	39,1	98	20	3	9	P26300-06 ..
 DIN 1835 B	T2710-24-W25-3-09-3-14	M 30	3,5	24	14	49,5	117	25	3	9	P26300-09 ..
	T2710-29-W32-3-09-3-16	M 36	4	29	16	58,5	131	32	3	9	P26300-11 ..
	T2710-35-W32-3-11-3-18	M 42	4,5	35	18	68,5	139	32	3	9	P26300-14 ..
	T2710-40-W40-3-14-3-20	M 48	5	40	20	79	163	40	3	9	P26300-14 ..
	T2710-44-W40-3-14-3-22	M 56	5,5	44	22	91	174	40	3	9	P26300-14 ..
	T2710-52-W40-4-14-3-24	M 64	6	52	24	103	185	40	4	12	P26300-14 ..

Adjustable coolant supply: remove front-sided coolant screw for blind hole machining
 Bodies and assembly parts are included in the scope of delivery

C3

Assembly parts

	D _c [mm]	16,5–19	24–29	35	40–52
	Coolant screw Tightening torque	FS2111 (T7IP) 0,9 Nm	FS2061 (T7IP) 0,9 Nm	FS1457 (T9IP) 2 Nm	FS2147 (T6IP) 0,6 Nm

Accessories

	D _c [mm]	16,5–19	24–35	40–52
	Torque screwdriver, analogue	FS2001	FS2003	FS2001
	Torque screwdriver, digital		FS2248	
	Interchangeable blade	FS2011 (T7IP)	FS2013 (T9IP)	FS2085 (T6IP)
	Screwdriver	FS2088 (T7IP)	FS1484 (T9IP)	FS2086 (T6IP)

Indexable inserts

Designation	Size	r mm	Pitch (P) mm	Lead (TPI) in	l mm	Number of cutting edges	P	M	K	N	S	H	
							HC	HC	HC	HC	HC	HC	
	P26300-0601-D61	06	0.1	1.40-2.9	18-9	6.73	3						
	P26300-0602-D61	06	0.2	3.00-3.2	8-8	6.58	3						
	P26300-0901-D61	09	0.1	1.40-2.9	18-9	9.48	3						
	P26300-0902-D61	09	0.2	3.00-4.3	8-6	9.34	3						
	P26300-1101-D61	11	0.1	1.40-2.9	18-9	10.85	3						
	P26300-1102-D61	11	0.2	3.00-4.5	8-6	10.71	3						
	P26300-1401-D61	14	0.1	1.40-2.9	18-9	13.87	3						
	P26300-1402-D61	14	0.2	3.00-5.2	8-5	13.72	3						
P26300-1404-D61	14	0.4	5.50-6.4	5-4	13.43	3							
	P26300-0601-D67	06	0.1	1.40-2.9	18-9	6.73	3						
	P26300-0602-D67	06	0.2	3.00-3.2	8-8	6.58	3						
	P26300-0901-D67	09	0.1	1.40-2.9	18-9	9.48	3						
	P26300-0902-D67	09	0.2	3.00-4.3	8-6	9.34	3						
	P26300-1102-D67	11	0.2	3.00-4.5	8-6	10.71	3						
	P26300-1401-D67	14	0.1	1.40-2.9	18-9	13.87	3						
	P26300-1402-D67	14	0.2	3.00-5.2	8-5	13.72	3						
	P26300-1404-D67	14	0.4	5.50-6.4	5-4	13.43	3						



HC = beschichtetes Hartmetall

Indexable insert thread milling cutter

T2710



- Universal indexable insert thread milling cutter
- Radius correction values: Walter GPS/Technical information

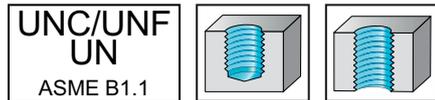

	P	M	K	N	S	H	O
T2710	●	●	●	●	●	●	●

Tool	Designation	D _N	D _c mm	l ₂₁ mm	l ₃ mm	l ₁ mm	d ₁ mm	Z	Number of cutting edges	Type	
 DIN 1835 B	T2710-18-W16-3-06-2-11.3	UNC 7/8-9	9	18	11,3	36,5	92	16	3	6	P26300-06 ..
	T2710-20-W20-3-06-3-12.7	UNC 1-8	8	20	12,7	41,1	100	20	3	9	P26300-06 ..
 DIN 1835 B	T2710-26-W25-3-09-3-12.7	UN 1.1/4-8	8	26	12,7	52,2	119	25	3	9	P26300-09 ..
	T2710-31-W32-3-09-3-19.1	UN 1.1/2-8	8	31	19,1	63,7	135	32	3	9	P26300-09 ..
	T2710-43-W40-4-09-3-25.4	UN 2-6	6	43	25,4	80,7	160	40	4	12	P26300-09 ..

Adjustable coolant supply: remove front-sided coolant screw for blind hole machining
 Bodies and assembly parts are included in the scope of delivery

C3

Assembly parts

	D _c [mm]	18–20	26–43
	Coolant screw Tightening torque	FS2147 (T6IP) 0,6 Nm	FS2111 (T7IP) 0,9 Nm

Accessories

	D _c [mm]	18–20	26–43
	Torque screwdriver, analogue	FS2001	FS2001
	Interchangeable blade	FS2085 (T6IP)	FS2011 (T7IP)
	Screwdriver	FS2086 (T6IP)	FS2088 (T7IP)

Indexable inserts

	Designation	Size	r mm	Pitch (P) mm	Lead (TPI) in	l mm	Number of cutting edges	P	M	K	N	S	H
								HC	HC	HC	HC	HC	HC
	P26300-0601-D61	06	0.1	1.40–2.9	18–9	6.73	3						
	P26300-0602-D61	06	0.2	3.00–3.2	8–8	6.58	3						
	P26300-0901-D61	09	0.1	1.40–2.9	18–9	9.48	3						
	P26300-0902-D61	09	0.2	3.00–4.3	8–6	9.34	3						
	P26300-0601-D67	06	0.1	1.40–2.9	18–9	6.73	3						
	P26300-0602-D67	06	0.2	3.00–3.2	8–8	6.58	3						
	P26300-0901-D67	09	0.1	1.40–2.9	18–9	9.48	3						
	P26300-0902-D67	09	0.2	3.00–4.3	8–6	9.34	3						



HC = beschichtetes Hartmetall

Indexable insert thread milling cutter

T2711 mm



- Universal indexable insert thread milling cutter
- Radius correction values: Walter GPS/Technical information

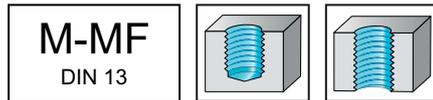

	P	M	K	N	S	H	O
T2711	●	●	●	●	●	●	●

Tool

	Designation	D _N	P _{max} mm	D _c mm	l ₂₁ mm	l ₃ mm	l ₁ mm	d ₁ mm	Z	Number of cutting edges	Type
<p>DIN 1835 B</p>	T2711-17-W16-3-06-2-20	M 20	2,5	16,5	20	43	98	16	3	6	P26300-06 ..
	T2711-19-W20-3-06-2-24	M 24	3	19	24	51	110	20	3	6	
	T2711-24-W25-3-09-2-31.5	M 30	3,5	24	31,5	64,5	132	25	3	6	P26300-09 ..
	T2711-52-W40-4-14-2-60	M 64	6	52	60	135	217	40	4	8	P26300-14 ..
<p>DIN 1835 B</p>	T2711-29-W32-3-09-3-24	M 36	4	29	24	72,1	149	32	3	9	P26300-09 ..
	T2711-35-W32-3-11-3-27	M 42	4,5	35	27	89,5	160	32	3	9	P26300-11 ..
	T2711-40-W40-3-14-3-30	M 48	5	40	30	103	187	40	3	9	P26300-14 ..
	T2711-44-W40-3-14-3-33	M 56	5,5	44	33	119	202	40	3	9	

Adjustable coolant supply: remove front-sided coolant screw for blind hole machining
 Bodies and assembly parts are included in the scope of delivery

Assembly parts

	D _c [mm]	16,5–19	24–29	35	40–52
	Coolant screw Tightening torque	FS2111 (T7IP) 0,9 Nm	FS2061 (T7IP) 0,9 Nm	FS1457 (T9IP) 2 Nm	FS2147 (T6IP) 0,6 Nm

Accessories

	D _c [mm]	16,5–19	24–35	40–52
	Torque screwdriver, analogue	FS2001	FS2003	FS2001
	Torque screwdriver, digital		FS2248	
	Interchangeable blade	FS2011 (T7IP)	FS2013 (T9IP)	FS2085 (T6IP)
	Screwdriver	FS2088 (T7IP)	FS1484 (T9IP)	FS2086 (T6IP)

Indexable inserts

Designation	Size	r mm	Pitch (P) mm	Lead (TPI) in	l mm	Number of cutting edges	P	M	K	N	S	H
							HC	HC	HC	HC	HC	HC
							WSM37S	WSM37S	WSM37S	WSM37S	WSM37S	WSM37S
 P26300-0601-D61 P26300-0602-D61 P26300-0901-D61 P26300-0902-D61 P26300-1401-D61 P26300-1402-D61 P26300-1404-D61 P26300-1101-D61 P26300-1102-D61	06	0.1	1.40–2.9	18–9	6.73	3						
	06	0.2	3.00–3.2	8–8	6.58	3						
	09	0.1	1.40–2.9	18–9	9.48	3						
	09	0.2	3.00–4.3	8–6	9.34	3						
	14	0.1	1.40–2.9	18–9	13.87	3						
	14	0.2	3.00–5.2	8–5	13.72	3						
	14	0.4	5.50–6.4	5–4	13.43	3						
	11	0.1	1.40–2.9	18–9	10.85	3						
 P26300-0601-D67 P26300-0602-D67 P26300-0901-D67 P26300-0902-D67 P26300-1401-D67 P26300-1402-D67 P26300-1404-D67 P26300-1102-D67	06	0.1	1.40–2.9	18–9	6.73	3						
	06	0.2	3.00–3.2	8–8	6.58	3						
	09	0.1	1.40–2.9	18–9	9.48	3						
	09	0.2	3.00–4.3	8–6	9.34	3						
	14	0.1	1.40–2.9	18–9	13.87	3						
	14	0.2	3.00–5.2	8–5	13.72	3						
	14	0.4	5.50–6.4	5–4	13.43	3						
	11	0.2	3.00–4.5	8–6	10.71	3						

HC = beschichtetes Hartmetall



C3

Indexable insert thread milling cutter

T2711 mm



- Universal indexable insert thread milling cutter
- Radius correction values: Walter GPS/Technical information

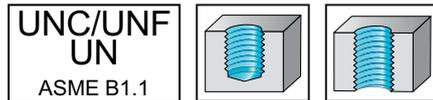

	P	M	K	N	S	H	O
T2711	●	●	●	●	●	●	●

Tool	Designation	D_N	D_c mm	l_{21} mm	l_3 mm	l_1 mm	d_1 mm	Z	Number of cutting edges	Type	
 DIN 1835 B	T2711-18-W16-3-06-2-25.4	UNC 7/8-9	9	18	25,4	47,5	103	16	3	6	P26300-06 ..
	T2711-20-W20-3-06-2-25.4	UNC 1-8	8	20	25,4	53,9	113	20	3	6	
	T2711-26-W25-3-09-2-32.7	UNC 1.1/4-7	7	26	32,7	68	135	25	3	6	P26300-09 ..
 DIN 1835 B	T2711-31-W32-3-09-3-25.4	UNC 1.1/2-6	6	31	25,4	80,7	153	32	3	9	P26300-09 ..

Adjustable coolant supply: remove front-sided coolant screw for blind hole machining
 Bodies and assembly parts are included in the scope of delivery

C3

Assembly parts

	D _c [mm]	18–20	26–31
	Coolant screw Tightening torque	FS2147 (T6IP) 0,6 Nm	FS2111 (T7IP) 0,9 Nm

Accessories

	D _c [mm]	18–20	26–31
	Torque screwdriver, analogue	FS2001	FS2001
	Interchangeable blade	FS2085 (T6IP)	FS2011 (T7IP)
	Screwdriver	FS2086 (T6IP)	FS2088 (T7IP)

Indexable inserts

	Designation	Size	r mm	Pitch (P) mm	Lead (TPI) in	l mm	Number of cutting edges	P	M	K	N	S	H
								HC	HC	HC	HC	HC	HC
	P26300-0601-D61	06	0.1	1.40–2.9	18–9	6.73	3						
	P26300-0602-D61	06	0.2	3.00–3.2	8–8	6.58	3						
	P26300-0901-D61	09	0.1	1.40–2.9	18–9	9.48	3						
	P26300-0902-D61	09	0.2	3.00–4.3	8–6	9.34	3						
	P26300-0601-D67	06	0.1	1.40–2.9	18–9	6.73	3						
	P26300-0602-D67	06	0.2	3.00–3.2	8–8	6.58	3						
	P26300-0901-D67	09	0.1	1.40–2.9	18–9	9.48	3						
	P26300-0902-D67	09	0.2	3.00–4.3	8–6	9.34	3						



HC = beschichtetes Hartmetall

Indexable insert thread milling cutter

T2711 / T2712 inch



- Universal indexable insert thread milling cutter
- Radius correction values: Walter GPS/Technical information

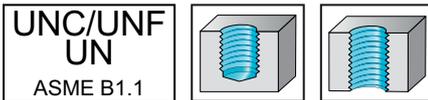

	P	M	K	N	S	H	O
T2711	●	●	●	●	●	●	●
T2712	●	●	●	●	●	●	●

Tool

Designation	D _N	D _c inch	l ₂₁ inch	l ₃ inch	l ₁ inch	d ₁ inch	Z	Number of cutting edges	Type	
T2711.20-W19-3-06-2-25.4	UNC 1	0,315	0,787	1,000	2,122	4,461	0,750	3	6	P26300-06 ..
T2711.26-W26-3-09-2-32.7	UNC 1.1/4-7	0,276	1,024	1,286	2,677	5,299	1,000	3	6	P26300-09 ..
T2711.31-W31-3-09-3-25.4	UNC 1.1/2-6	0,236	1,22	1,000	3,177	5,892	1,250	3	9	P26300-09 ..
T2712.20-W19-3-06	UNC 1	0,315	0,787		2,618	4,953	0,750	3	3	P26300-06 ..
T2712.23-W26-3-09	UNC 1 1/8	0,276	0,886		2,992	5,675	1,000	3	3	P26300-09 ..
T2712.28-W31-3-09	UNC 1 3/8	0,236	1,083		3,622	6,482	1,250	3	3	P26300-09 ..

Adjustable coolant supply: remove front-sided coolant screw for blind hole machining
Bodies and assembly parts are included in the scope of delivery

C3

Assembly parts

	D _c [inch]	0,79	0,89–1,22
	Coolant screw Tightening torque	FS2147 (T6IP) 0,6 Nm	FS2111 (T7IP) 0,9 Nm

Accessories

	D _c [inch]	0,79	0,89–1,22
	Torque screwdriver, analogue	FS2002	FS2002
	Interchangeable blade	FS2085 (T6IP)	FS2011 (T7IP)
	Screwdriver	FS2086 (T6IP)	FS2088 (T7IP)

Indexable inserts


Designation	Size	r mm	Pitch (P) mm	Lead (TPI) in	l mm	Number of cutting edges	P	M	K	N	S	H
							HC	HC	HC	HC	HC	HC
 P26300-0601-D61 P26300-0602-D61 P26300-0901-D61 P26300-0902-D61	06	0.1	1.40–2.9	18–9	6.73	3	WSM37S	WSM37S	WSM37S	WSM37S	WSM37S	WSM37S
	06	0.2	3.00–3.2	8–8	6.58	3	HC	HC	HC	HC	HC	HC
	09	0.1	1.40–2.9	18–9	9.48	3	WSM37S	WSM37S	WSM37S	WSM37S	WSM37S	WSM37S
	09	0.2	3.00–4.3	8–6	9.34	3	HC	HC	HC	HC	HC	HC
 P26300-0601-D67 P26300-0602-D67 P26300-0901-D67 P26300-0902-D67	06	0.1	1.40–2.9	18–9	6.73	3	WSM37S	WSM37S	WSM37S	WSM37S	WSM37S	WSM37S
	06	0.2	3.00–3.2	8–8	6.58	3	HC	HC	HC	HC	HC	HC
	09	0.1	1.40–2.9	18–9	9.48	3	WSM37S	WSM37S	WSM37S	WSM37S	WSM37S	WSM37S
	09	0.2	3.00–4.3	8–6	9.34	3	HC	HC	HC	HC	HC	HC
 P26310-09G11-D61	09	0.2	2.30–2.3	11–11	9.34	3	WSM37S	WSM37S	WSM37S	WSM37S	WSM37S	WSM37S

HC = beschichtetes Hartmetall

Indexable insert thread milling cutter

T2712 mm


- Universal indexable insert thread milling cutter
- Radius correction values: Walter GPS/Technical information



	P	M	K	N	S	H	O
T2712	●	●	●	●	●	●	●

Tool

	Designation	D _N	P _{max} mm	D _c mm	l _{z1} mm	L _c mm	l ₃ mm	l ₁ mm	d ₁ mm	Z	Number of cutting edges	Type
 DIN 1835 B	T2712-17-W16-3-06	M 20	2,5	16,5			53	108	16	3	3	P26300-06 ..
	T2712-19-W20-3-06	M 24	3	19			63	123	20	3	3	
	T2712-24-W25-3-09	M 30	3,5	24			79,5	148	25	3	3	P26300-09 ..
	T2712-29-W32-3-09	M 36	4	29			94,5	167	32	3	3	
	T2712-35-W32-3-11	M 42	4,5	35			110,5	181	32	3	3	P26300-11 ..
	T2712-40-W40-3-14	M 48	5	40			127	211	40	3	3	P26300-14 ..
	T2712-44-W40-3-14	M 56	5,5	44			147	230	40	3	3	
T2712-52-W40-4-14	M 64	6	52			167	249	40	4	4		
 DIN 1835 B	T2712-24-W25-3-09-2-31.5	M 30	3,5	24	31,5	63	79,5	147	25	3	6	P26300-09 ..
	T2712-29-W32-3-09-2-36	M 36	4	29	36	72	94,5	167	32	3	6	
	T2712-35-W32-3-11-2-40.5	M 42	4,5	35	40,5	81	110,5	180	32	3	6	P26300-11 ..
	T2712-40-W40-3-14-2-50	M 48	5	40	50	100	127	211	40	3	6	P26300-14 ..

Adjustable coolant supply: remove front-sided coolant screw for blind hole machining
 Bodies and assembly parts are included in the scope of delivery

Assembly parts

	D _c [mm]	16,5–19	24–29	35	40–52
	Coolant screw Tightening torque	FS2111 (T7IP) 0,9 Nm	FS2061 (T7IP) 0,9 Nm	FS1457 (T9IP) 2 Nm	FS2147 (T6IP) 0,6 Nm

Accessories

	D _c [mm]	16,5–19	24–35	40–52
	Torque screwdriver, analogue	FS2001	FS2003	FS2001
	Torque screwdriver, digital		FS2248	
	Interchangeable blade	FS2011 (T7IP)	FS2013 (T9IP)	FS2085 (T6IP)
	Screwdriver	FS2088 (T7IP)	FS1484 (T9IP)	FS2086 (T6IP)

Indexable inserts

Designation	Size	r mm	Pitch (P) mm	Lead (TPI) in	l mm	Number of cutting edges	P	M	K	N	S	H	
							HC	HC	HC	HC	HC	HC	
	P26300-0601-D61	06	0.1	1.40–2.9	18–9	6.73	3						
	P26300-0602-D61	06	0.2	3.00–3.2	8–8	6.58	3						
	P26300-0901-D61	09	0.1	1.40–2.9	18–9	9.48	3						
	P26300-0902-D61	09	0.2	3.00–4.3	8–6	9.34	3						
	P26300-1101-D61	11	0.1	1.40–2.9	18–9	10.85	3						
	P26300-1102-D61	11	0.2	3.00–4.5	8–6	10.71	3						
	P26300-1401-D61	14	0.1	1.40–2.9	18–9	13.87	3						
	P26300-1402-D61	14	0.2	3.00–5.2	8–5	13.72	3						
	P26300-1404-D61	14	0.4	5.50–6.4	5–4	13.43	3						
	P26300-0601-D67	06	0.1	1.40–2.9	18–9	6.73	3						
	P26300-0602-D67	06	0.2	3.00–3.2	8–8	6.58	3						
	P26300-0901-D67	09	0.1	1.40–2.9	18–9	9.48	3						
	P26300-0902-D67	09	0.2	3.00–4.3	8–6	9.34	3						
	P26300-1102-D67	11	0.2	3.00–4.5	8–6	10.71	3						
	P26300-1401-D67	14	0.1	1.40–2.9	18–9	13.87	3						
	P26300-1402-D67	14	0.2	3.00–5.2	8–5	13.72	3						
	P26300-1404-D67	14	0.4	5.50–6.4	5–4	13.43	3						
	P26310-09G11-D61	09	0.2	2.30–2.3	11–11	9.34	3						
	P26310-14G11-D61	14	0.2	2.30–2.3	11–11	13.72	3						


HC = beschichtetes Hartmetall

Indexable insert thread milling cutter

T2712




- Universal indexable insert thread milling cutter
- Radius correction values: Walter GPS/Technical information



	P	M	K	N	S	H	O
T2712	●	●	●	●	●	●	●

Tool



DIN 1835 B

Designation	D_N	P_{max} mm	D_c mm	l_3 mm	l_1 mm	d_1 mm	Z	Number of cutting edges	Type
T2712-17-W16-3-06	M 20	2,5	16,5	53	108	16	3	3	P26300-06 ..
T2712-19-W20-3-06	M 24	3	19	63	123	20	3	3	
T2712-24-W25-3-09	M 30	3,5	24	79,5	148	25	3	3	P26300-09 ..
T2712-29-W32-3-09	M 36	4	29	94,5	167	32	3	3	
T2712-35-W32-3-11	M 42	4,5	35	110,5	181	32	3	3	P26300-11 ..
T2712-40-W40-3-14	M 48	5	40	127	211	40	3	3	P26300-14 ..
T2712-44-W40-3-14	M 56	5,5	44	147	230	40	3	3	
T2712-52-W40-4-14	M 64	6	52	167	249	40	4	4	

Adjustable coolant supply: remove front-sided coolant screw for blind hole machining
Bodies and assembly parts are included in the scope of delivery

Assembly parts

	D _c [mm]	16,5–19	24–29	35	40–52
	Coolant screw Tightening torque	FS2111 (T7IP) 0,9 Nm	FS2061 (T7IP) 0,9 Nm	FS1457 (T9IP) 2 Nm	FS2147 (T6IP) 0,6 Nm

Accessories

	D _c [mm]	16,5–19	24–35	40–52
	Torque screwdriver, analogue	FS2001	FS2003	FS2001
	Torque screwdriver, digital		FS2248	
	Interchangeable blade	FS2011 (T7IP)	FS2013 (T9IP)	FS2085 (T6IP)
	Screwdriver	FS2088 (T7IP)	FS1484 (T9IP)	FS2086 (T6IP)

Indexable inserts

Designation	Size	r mm	Pitch (P) mm	Lead (TPI) in	l mm	Number of cutting edges	P	M	K	N	S	H	
							HC	HC	HC	HC	HC	HC	
	P26300-0601-D61	06	0.1	1.40–2.9	18–9	6.73	3						
	P26300-0602-D61	06	0.2	3.00–3.2	8–8	6.58	3						
	P26300-0901-D61	09	0.1	1.40–2.9	18–9	9.48	3						
	P26300-0902-D61	09	0.2	3.00–4.3	8–6	9.34	3						
	P26300-1101-D61	11	0.1	1.40–2.9	18–9	10.85	3						
	P26300-1102-D61	11	0.2	3.00–4.5	8–6	10.71	3						
	P26300-1401-D61	14	0.1	1.40–2.9	18–9	13.87	3						
	P26300-1402-D61	14	0.2	3.00–5.2	8–5	13.72	3						
	P26300-1404-D61	14	0.4	5.50–6.4	5–4	13.43	3						
	P26300-0601-D67	06	0.1	1.40–2.9	18–9	6.73	3						
	P26300-0602-D67	06	0.2	3.00–3.2	8–8	6.58	3						
	P26300-0901-D67	09	0.1	1.40–2.9	18–9	9.48	3						
	P26300-0902-D67	09	0.2	3.00–4.3	8–6	9.34	3						
	P26300-1102-D67	11	0.2	3.00–4.5	8–6	10.71	3						
	P26300-1401-D67	14	0.1	1.40–2.9	18–9	13.87	3						
	P26300-1402-D67	14	0.2	3.00–5.2	8–5	13.72	3						
	P26300-1404-D67	14	0.4	5.50–6.4	5–4	13.43	3						
	P26310-09G11-D61	09	0.2	2.30–2.3	11–11	9.34	3						
	P26310-14G11-D61	14	0.2	2.30–2.3	11–11	13.72	3						

HC = beschichtetes Hartmetall



C3

Indexable insert thread milling cutter

T2712



- Universal indexable insert thread milling cutter
- Radius correction values: Walter GPS/Technical information

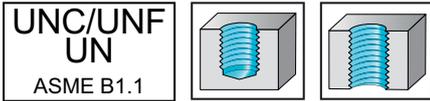

	P	M	K	N	S	H	O
T2712	●	●	●	●	●	●	●

Tool	Designation	D _N	D _c mm	l ₂₁ mm	L _c mm	l ₃ mm	l ₁ mm	d ₁ mm	Z	Number of cutting edges	Type	
	T2712-26-W25-3-09-2-32.7	UNC 1 1/4-7	7	26	32,7	65,3	84	151	25	3	6	P26300-09 ..
	T2712-31-W32-3-09-2-38.1	UNC 1 1/2-6	6	31	38,1	76,2	99,8	172	32	3	6	

DIN 1835 B

Adjustable coolant supply: remove front-sided coolant screw for blind hole machining
Bodies and assembly parts are included in the scope of delivery

C3

Assembly parts

	D _c [mm]	26-31
	Coolant screw Tightening torque	FS2111 (T7IP) 0,9 Nm

Accessories

	D _c [mm]	26-31
	Torque screwdriver, analogue	FS2001
	Interchangeable blade	FS2011 (T7IP)
	Screwdriver	FS2088 (T7IP)

Indexable inserts


Designation	Size	r mm	Pitch (P) mm	Lead (TPI) in	l mm	Number of cutting edges	P	M	K	N	S	H
							HC	HC	HC	HC	HC	HC
 P26300-0901-D61 P26300-0902-D61	09	0.1	1.40-2.9	18-9	9.48	3	WSM375 HC	WSM375 HC	WSM375 HC	WSM375 HC	WSM375 HC	WSM375 HC
	09	0.2	3.00-4.3	8-6	9.34	3	WSM375 HC	WSM375 HC	WSM375 HC	WSM375 HC	WSM375 HC	WSM375 HC
 P26300-0901-D67 P26300-0902-D67	09	0.1	1.40-2.9	18-9	9.48	3	WSM375 HC	WSM375 HC	WSM375 HC	WSM375 HC	WSM375 HC	WSM375 HC
	09	0.2	3.00-4.3	8-6	9.34	3	WSM375 HC	WSM375 HC	WSM375 HC	WSM375 HC	WSM375 HC	WSM375 HC

HC = beschichtetes Hartmetall

Indexable insert thread milling cutter

T2713 mm


- Universal indexable insert thread milling cutter
- Radius correction values: Walter GPS/Technical information



T2713	P	M	K	N	S	H	O
	●	●	●	●	●	●	●

Tool	Designation	D_N	P_{max} mm	D_c mm	l_3 mm	l_1 mm	d_1 mm	Z	Number of cutting edges	Type
	T2713-60-C5-4-14	M 72	6	60	115	152	50	4	4	P26300-14 ..
	T2713-73-C6-5-14	M 85	6	73	125	170	63	5	5	
	T2713-94-C8-5-22	M 125	10	94	140	199	80	5	5	P26300-22 ..
Walter Capto™ in acc. with ISO 26623										
	T2713-17-W16-3-06	M 20	2,5	16,5	63	118	16	3	3	P26300-06 ..
	T2713-19-W20-3-06	M 24	3	19	75	135	20	3	3	
	T2713-24-W25-3-09	M 30	3,5	24	94,5	163	25	3	3	P26300-09 ..
	T2713-29-W32-3-09	M 36	4	29	112,5	185	32	3	3	
	T2713-35-W32-3-11	M 42	4,5	35	131,5	202	32	3	3	P26300-11 ..
	T2713-40-W40-3-14	M 48	5	40	151	235	40	3	3	P26300-14 ..
	T2713-44-W40-3-14	M 56	5,5	44	175	258	40	3	3	
T2713-52-W40-4-14	M 64	6	52	199	281	40	4	4		

Adjustable coolant supply: remove front-sided coolant screw for blind hole machining
 Bodies and assembly parts are included in the scope of delivery

C3

Assembly parts

D _c [mm]	16,5–19	24–29	35	40–73	94
Coolant screw Tightening torque	FS2111 (T7IP) 0,9 Nm	FS2061 (T7IP) 0,9 Nm	FS1457 (T9IP) 2 Nm	FS1495 (T20IP) 5 Nm	FS2147 (T6IP) 0,6 Nm

Accessories

D _c [mm]	16,5–19	24–35	40–73	94
Torque screwdriver, analogue	FS2001	FS2003	FS2003	FS2001
Torque screwdriver, digital		FS2248		
Interchangeable blade			FS2015 (T20IP)	
Screwdriver			FS1486 (T20IP)	
Interchangeable blade	FS2011 (T7IP)	FS2013 (T9IP)		FS2085 (T6IP)
Screwdriver	FS2088 (T7IP)	FS1484 (T9IP)		FS2086 (T6IP)

Indexable inserts

Designation	Size	r mm	Pitch (P) mm	Lead (TPI) in	l mm	Number of cutting edges	P	M	K	N	S	H
							HC	HC	HC	HC	HC	HC
	P26300-1401-D61	14	0.1	1.40–2.9	18–9	13,87	3	☒	☒	☒	☒	☒
	P26300-1402-D61	14	0.2	3.00–5.2	8–5	13,72	3	☒	☒	☒	☒	☒
	P26300-1404-D61	14	0.4	5.50–6.4	5–4	13,43	3	☒	☒	☒	☒	☒
	P26300-2204-D61	22	0.4	6.00–10.0	4–3	21,41	3	☒	☒	☒	☒	☒
	P26300-0601-D61	06	0.1	1.40–2.9	18–9	6,73	3	☒	☒	☒	☒	☒
	P26300-0602-D61	06	0.2	3.00–3.2	8–8	6,58	3	☒	☒	☒	☒	☒
	P26300-0901-D61	09	0.1	1.40–2.9	18–9	9,48	3	☒	☒	☒	☒	☒
	P26300-0902-D61	09	0.2	3.00–4.3	8–6	9,34	3	☒	☒	☒	☒	☒
	P26300-1101-D61	11	0.1	1.40–2.9	18–9	10,85	3	☒	☒	☒	☒	☒
	P26300-1102-D61	11	0.2	3.00–4.5	8–6	10,71	3	☒	☒	☒	☒	☒
	P26300-1401-D67	14	0.1	1.40–2.9	18–9	13,87	3	☒	☒	☒	☒	☒
	P26300-1402-D67	14	0.2	3.00–5.2	8–5	13,72	3	☒	☒	☒	☒	☒
	P26300-1404-D67	14	0.4	5.50–6.4	5–4	13,43	3	☒	☒	☒	☒	☒
	P26310-14G11-D61	14	0.2	2.30–2.3	11–11	13,72	3	☒	☒	☒	☒	☒
	P26310-09G11-D61	09	0.2	2.30–2.3	11–11	9,34	3	☒	☒	☒	☒	☒


HC = beschichtetes Hartmetall

C3

Thread milling cutter inserts – M, MF, UNC, UNF, UN

P26300

Tiger-tec® Silver




Indexable inserts

Designation	Size	r mm	Pitch (P) mm	Lead (TPI) in	l mm	Number of cutting edges	P	M	K	N	S	H
							HC	HC	HC	HC	HC	HC
							WSM375	WSM375	WSM375	WSM375	WSM375	WSM375
	P26300-0601-D61	06	0,1	1,40–2,9	18–9	6,73	3	☑	☑	☑	☑	☑
	P26300-0602-D61	06	0,2	3,00–3,2	8–8	6,58	3	☑	☑	☑	☑	☑
	P26300-0901-D61	09	0,1	1,40–2,9	18–9	9,48	3	☑	☑	☑	☑	☑
	P26300-0902-D61	09	0,2	3,00–4,3	8–6	9,34	3	☑	☑	☑	☑	☑
	P26300-1101-D61	11	0,1	1,40–2,9	18–9	10,85	3	☑	☑	☑	☑	☑
	P26300-1102-D61	11	0,2	3,00–4,5	8–6	10,71	3	☑	☑	☑	☑	☑
	P26300-1401-D61	14	0,1	1,40–2,9	18–9	13,87	3	☑	☑	☑	☑	☑
	P26300-1402-D61	14	0,2	3,00–5,2	8–5	13,72	3	☑	☑	☑	☑	☑
	P26300-1404-D61	14	0,4	5,50–6,4	5–4	13,43	3	☑	☑	☑	☑	☑
	P26300-2204-D61	22	0,4	6,00–10,0	4–3	21,41	3	☑	☑	☑	☑	☑
	P26300-0601-D67	06	0,1	1,40–2,9	18–9	6,73	3	☑	☑	☑	☑	☑
	P26300-0602-D67	06	0,2	3,00–3,2	8–8	6,58	3	☑	☑	☑	☑	☑
	P26300-0901-D67	09	0,1	1,40–2,9	18–9	9,48	3	☑	☑	☑	☑	☑
	P26300-0902-D67	09	0,2	3,00–4,3	8–6	9,34	3	☑	☑	☑	☑	☑
	P26300-1102-D67	11	0,2	3,00–4,5	8–6	10,71	3	☑	☑	☑	☑	☑
	P26300-1401-D67	14	0,1	1,40–2,9	18–9	13,87	3	☑	☑	☑	☑	☑
	P26300-1402-D67	14	0,2	3,00–5,2	8–5	13,72	3	☑	☑	☑	☑	☑
	P26300-1404-D67	14	0,4	5,50–6,4	5–4	13,43	3	☑	☑	☑	☑	☑

Ordering example for the grade WSM375: P26300-0601-D61 WSM375

HC = Coated carbide

Thread milling cutter inserts – G (BSP)
P26310
Tiger-tec® Silver




Indexable inserts

Designation	Size	r mm	Pitch (P) mm	Lead (TPI) in	l mm	Number of cutting edges	P	M	K	N	S	H
							HC	HC	HC	HC	HC	HC
							WSM37S	WSM37S	WSM37S	WSM37S	WSM37S	WSM37S
 P26310-09G11-D61 P26310-14G11-D61	09	0.2	2.30-2.3	11-11	9.34	3	☺	☺	☺	☺	☺	☺
	14	0.2	2.30-2.3	11-11	13.72	3	☺	☺	☺	☺	☺	☺


Ordering example for the grade WSM37S: P26310-09G11-D61 WSM37S

HC = Coated carbide

C3

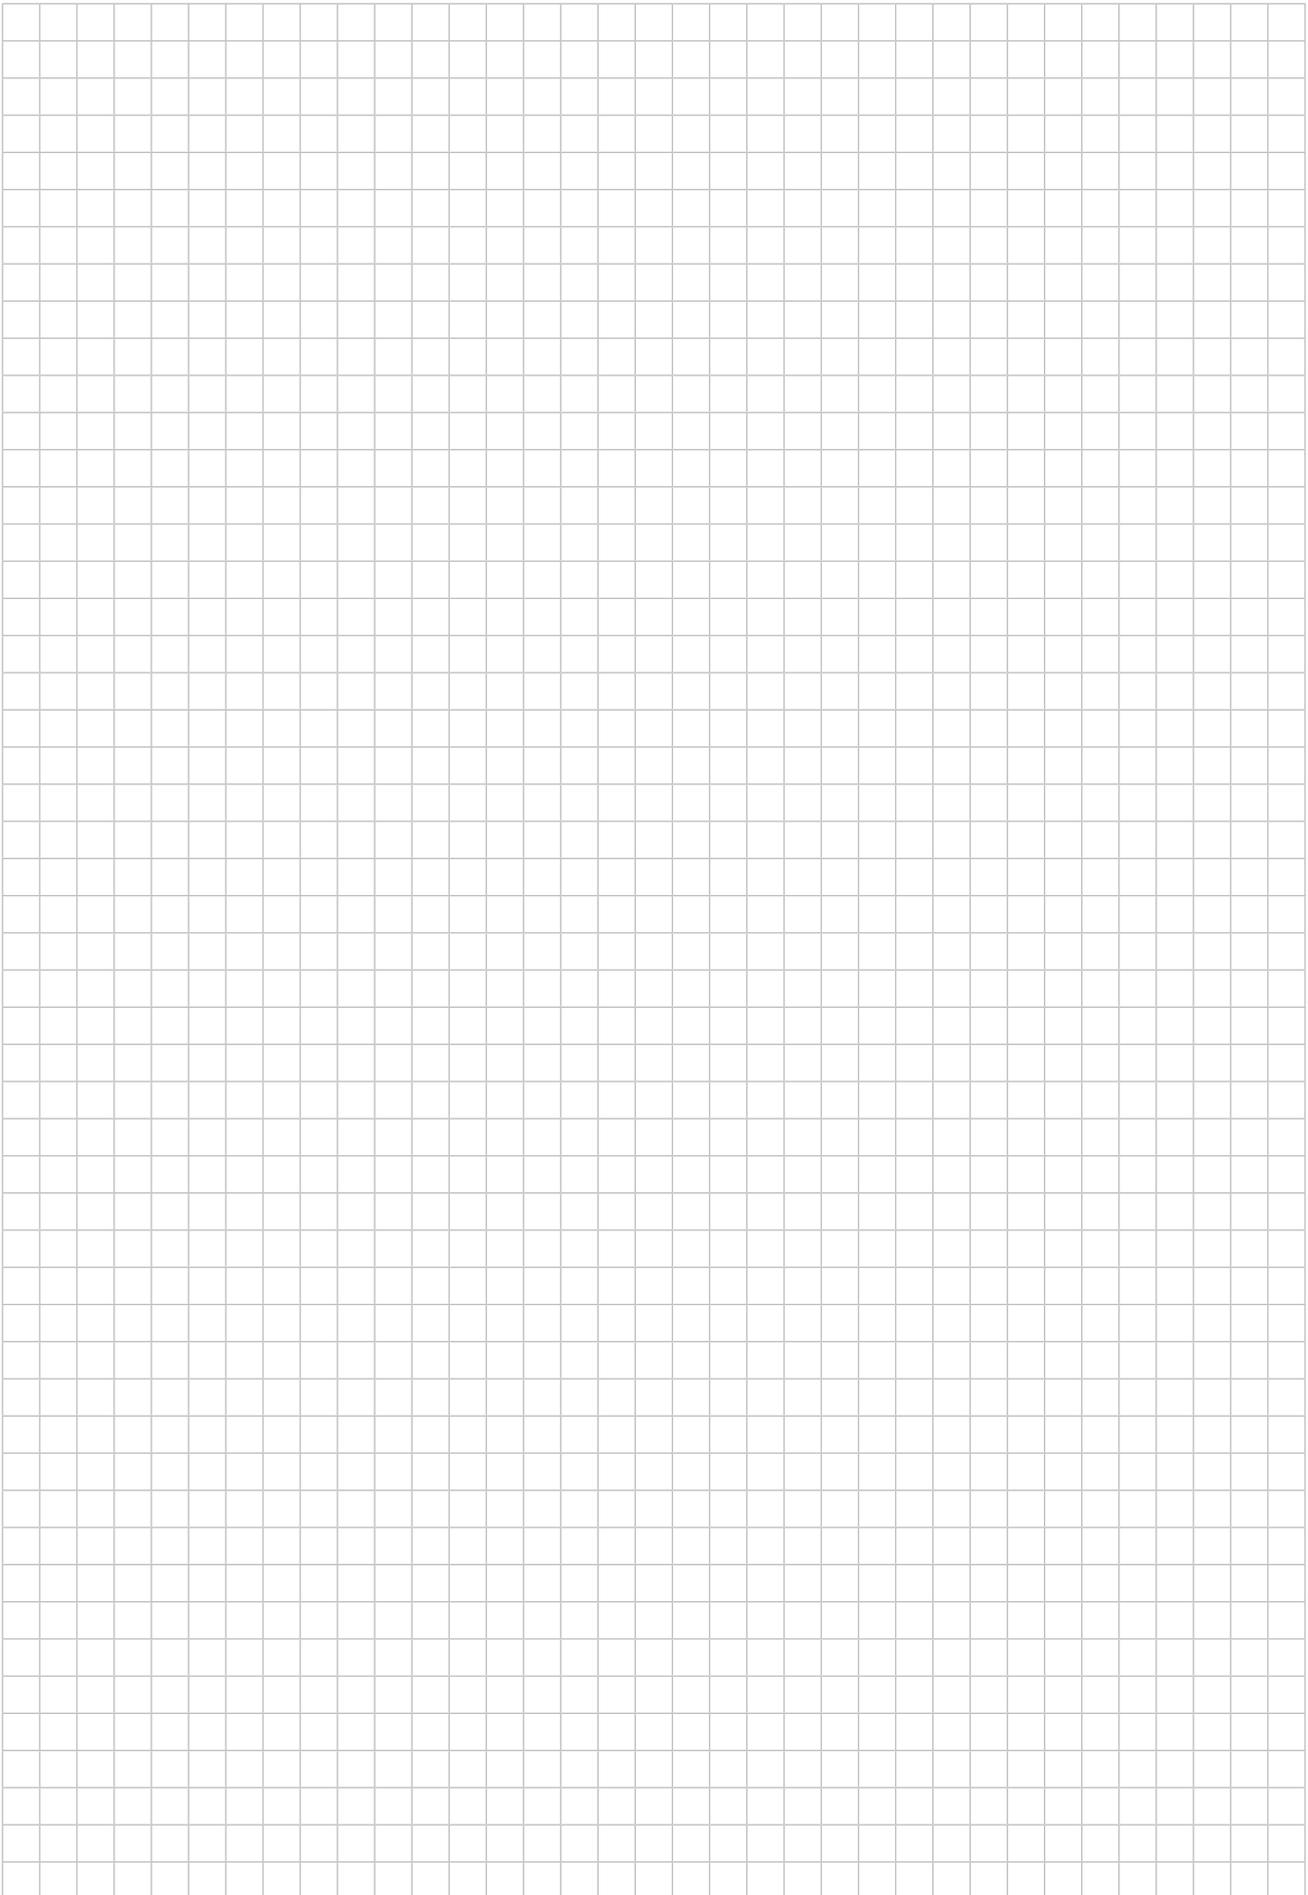

C3

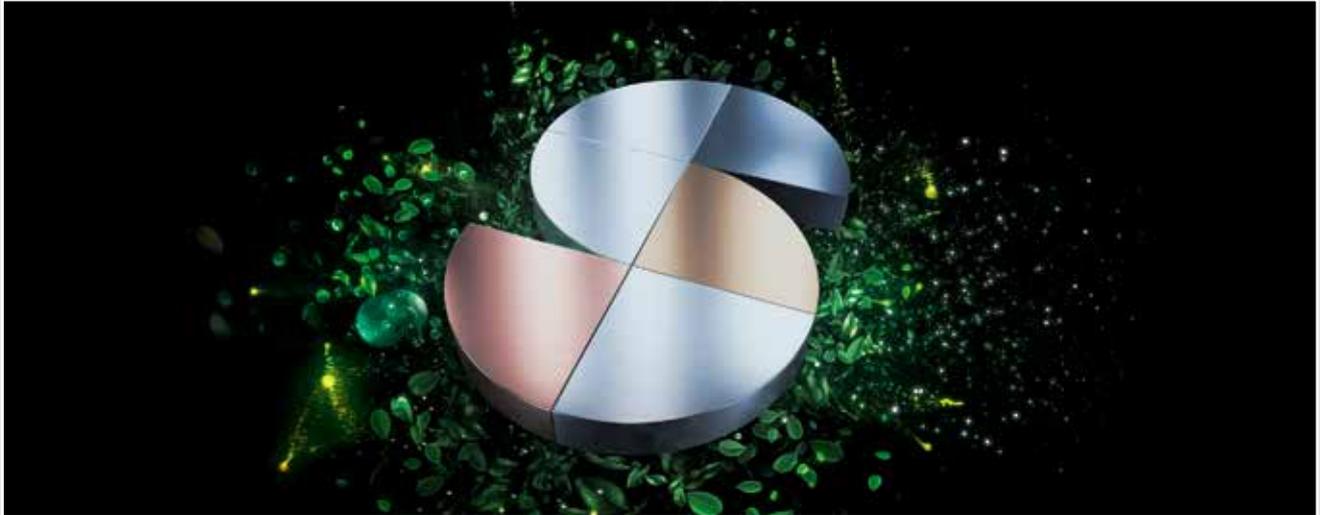

Sustainable products and services – certified and transparent

Walter is a company that takes responsibility for people and the environment. Sustainability is a central component of our corporate strategy. It pervades our products and business divisions and is reviewed and certified by independent third parties on a regular basis.

Proven to be produced to high standards

All processes, procedures, methods and instruments that we use are checked and certified by an independent body according to strict criteria. Occupational health and safety, quality assurance and environmentally friendly actions (for example through resource-saving, energy-efficient and CO₂-offset production) are examples of this. Our social commitment shows that Walter has a broader definition of responsibility.

Transparency throughout the entire process chain – for your peace of mind

The integrated management system at Walter includes the sustainable use of resources and production equipment as well as of people – our customers, partners and employees. So that you can count on all of our products meeting these requirements throughout the entire process chain, we apply our own benchmarks to our suppliers too.

Certification

The integrated management system at Walter includes certification in accordance with:

- ISO 9001 (Quality management)
- VDA 6.4 (Production equipment for the automotive industry)
- ISO 14001 (Environmental management)
- ISO 45001 (Occupational health and safety management)
- ISO 50001 (Energy management)



You can find more information on Walter certification here:



Occupational health and safety

Walter protects its employees against health hazards. To prevent accidents, we continuously review our processes and take proactive measures as a precaution.



Environmental and energy management

Environmental protection is an important company objective for Walter. We use energy efficiently and deploy practical methods to sustainably reduce the consumption of energy, water and resources.




Quality management

Walter is continuously improving its products and processes. We ensure our product quality using effective measures and procedures – and check it on a regular basis with our comprehensive quality management system.

Walter AG

Derendinger Straße 53, 72072 Tübingen
Postfach 2049, 72010 Tübingen
Germany

walter-tools.com

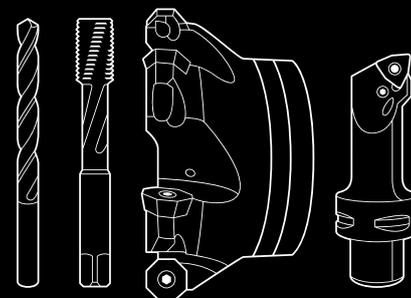

Europe

Walter Austria GmbH

Wien, Österreich
+43 1 5127300-0, service.at@walter-tools.com

Walter Benelux N.V./S.A.

Zaventem, Belgique
(B) +32 (02) 7258500
(NL) +31 (0) 900 26585-22
service.benelux@walter-tools.com

Walter (Schweiz) AG

Solothurn, Schweiz
+41 (0) 32 617 40 72, service.ch@walter-tools.com

Walter CZ s.r.o

Kurim, Czech Republic
+420 (0) 541 423352, service.cz@walter-tools.com

Walter Deutschland GmbH

Frankfurt, Deutschland
+49 (0) 69 78902-100, service.de@walter-tools.com

Walter France

Soultz-sous-Forêts, France
+33 (0) 3 88 80 20 00, service.fr@walter-tools.com

Walter Hungária Kft.

Budapest, Magyarország
+36 1 464 7160, service.hu@walter-tools.com

Walter Tools Ibérica S.A.U.

El Prat de Llobregat, España
+34 934 796760, service.iberica@walter-tools.com

Walter Italia s.r.l.

Via Volta, s.n.c., 22071 Cadorago - CO, Italia
+39 031 926-111, service.it@walter-tools.com

Walter Norden AB

Halmstad, Sweden
+46 (0) 35 16 53 00, service.norden@walter-tools.com

Walter Polska Sp. z o.o.

Warszawa, Polska
+48 (0) 22 8520495, service.pl@walter-tools.com

Walter Tools SRL

Timisoara, România
+40 (0) 256 406218, service.ro@walter-tools.com

ООО „Вальтер“

г. Санкт-Петербург
+7 (812) 334 54 56, service.ru@walter-tools.com

Walter Tools d.o.o.

Maribor, Slovenija
+386 (2) 629 01 30, service.si@walter-tools.com

Walter Slovakia, s.r.o.

Nitra, Slovakia
+421 (0) 37 3260 910, service.sk@walter-tools.com

Walter Kesici Takımlar Sanayi ve Ticaret Ltd. Şti.

Bursa, Türkiye
+90 (0) 216 528 1900 Pbx, service.tr@walter-tools.com

Walter GB Ltd.

Bromsgrove, England
+44 (1527) 839 450, service.uk@walter-tools.com

Asia

Walter Wuxi Co. Ltd.

Wuxi, Jiangsu, P.R. China
+86 (510) 853 72199, service.cn@walter-tools.com

Walter Wuxi Co. Ltd.

中国江苏省无锡市新区新畅南路3号
电话: +86-510-8537 2199 邮编: 214028
客服热线: 400 1510 510
邮箱: service.cn@walter-tools.com

Walter Tools India Pvt. Ltd.

Pune, India
+91 (20) 6773 7300, service.in@walter-tools.com

Walter Japan K.K.

Nagoya, Japan
+81 (52) 533 6135, service.jp@walter-tools.com

ワルタージャパン株式会社

名古屋市中村区名駅二丁目45番7号
+81 (0) 52 533 6135, service.jp@walter-tools.com

Walter Korea Ltd.

Anyang-si Gyeonggi-do, Korea
+82 (31) 337 6100, service.wkr@walter-tools.com

한국발터(주)

경기도 안양시 동안구 학의로 282
금강펜테리움 106호 14056
+82 (0) 31 337 6100, service.wkr@walter-tools.com

Walter Malaysia Sdn. Bhd.

Selangor D.E., Malaysia
+60(3)-5624 4265, service.my@walter-tools.com

Walter AG Singapore Pte. Ltd.

+65 6773 6180, service.sg@walter-tools.com

Walter (Thailand) Co., Ltd.

Bangkok, 10120, Thailand
+66 2 687 0388, service.th@walter-tools.com

America

Walter do Brasil Ltda.

Sorocaba - SP, Brasil
+55 15 32245700, service.br@walter-tools.com

Walter Canada

Mississauga, Canada
service.ca@walter-tools.com

Walter Tools S.A. de C.V.

El Marqués, Querétaro, México
+52 (442) 478-3500, service.mx@walter-tools.com

Walter USA, LLC

Greer, SC, USA
+1 800-945-5554, service.us@walter-tools.com